

LOYALTY BUILDING HOTEL

Certificate of Appropriateness Drawing Attachment

May 24, 2011

DRAWING LIST

1. Cover Sheet & Drawing List
2. View Looking Northwest
3. East Elevation
4. South Elevation
5. West Elevation
6. North Elevation
7. Architectural Site Plan
8. Ground Floor Plan
9. 1st Floor Plan
10. 4th Floor Plan (2nd, 3rd and 5th similar)
11. Roof Plan
12. Broadway Entrance

*Rec'd @ HP
6/2/11*



Copyright © 2011 Kahler Slater, Inc. All Rights Reserved.

VIEW LOOKING NORTHWEST

COPYRIGHT © 2011 KAHLER SLATER, INC. ALL RIGHTS RESERVED.

Kahler Slater
experience design

LOYALTY BUILDING HOTEL
611 N. BROADWAY



ELEVATION GENERAL NOTES

1. EXTERIOR WINDOW SASHES, FRAMES, SILLS, AND MOLDINGS TO BE SCRAPPED, SANDED, REPUTTIED, SEALED, AND REPAINTED. ROTTEN SASH MEMBERS SHALL BE REPAIRED OR REPLACED IN KIND. REPLACE CRACKED OR BROKEN GLASS. REGLAZE LOOSE OR MISSING PUTTY. ROTTEN SILLS SHALL BE REPAIRED WITH ABATRON LIQUIDWOOD AND WOODPOX. PRIME BARE WOOD AND APPLY TWO TOPCOATS OF EXTERIOR LATEX PAINT. OPERABLE SASHES ARE TO BE FIXED IN CLOSED POSITION. PROVIDE SEALANT AT PERIMETER OF ALL SASHES. PROVIDE SEALANT AT PERIMETER OF WINDOW FRAME, BETWEEN WOOD AND STONE. REATTACH LOOSE WINDOW HARDWARE. PROVIDE NEW FIXED ALUMINUM STORM LITE AT INTERIOR SIDE OF WINDOW ASSEMBLY.
2. REMOVE ABANDONED CONDUIT, PIPING, SIGNAGE, ANCHORS AND FASTENERS FROM BUILDING FACADES. PATCH HOLES TO MATCH SURROUNDING MATERIALS.
3. EXTERIOR GRANITE TO BE STRIPPED, CLEANED AND REPOINTED. REMOVE EXISTING PAINT WITH CHEMICAL PAINT STRIPPER AS MANUFACTURED BY CATHEDRAL STONE PRODUCTS, OR EQUAL. RINSE WITH LOW-PRESSURE WASH. FOLLOWING PAINT REMOVAL, CLEAN STONE WITH ENVIRO KLEAN SAFRESTORER AS MANUFACTURED BY PROSOCO OR EQUAL. RINSE WITH LOW-PRESSURE WASH. PROTECT ADJACENT SURFACES FROM OVER-SPRAY. REPOINT MASONRY WHERE EXISTING MORTAR IS LOOSE, DAMAGED, MISSING OR HAS BEEN REPLACED WITH SEALANT, WITH COMPATIBLE MORTAR; PROFILE TO MATCH ORIGINAL PROFILE, INCLUDING "BEAD" PROFILE WHERE APPLICABLE.
4. SKYWARD-FACING JOINTS AT GRANITE (PARAPET CAPS, WINDOW SILLS, ETC.) SHALL BE CUT OUT AND REPLACED WITH SEALANT AND BOND BREAKER.
5. EXTERIOR BRICK (NORTH AND WEST FACADES) SHALL BE REPOINTED WHERE EXISTING MORTAR IS LOOSE, DAMAGED, MISSING OR HAS BEEN REPLACED WITH SEALANT. USE CAUTION WHEN CUTTING JOINTS TO NOT DAMAGE SURROUNDING BRICK; USE OF POWER TOOLS TO CUT VERTICAL MORTAR JOINTS MAY BE PROHIBITED.
6. REMOVE ALL ABANDONED CONDUIT, FASTENERS, SIGNS, AND OTHER SURFACE-MOUNTED FIXTURES.

ELEVATION KEYED NOTES

- | | | |
|--|---|--|
| <ol style="list-style-type: none"> ① REBUILD PARAPET PER STRUCTURAL ENGINEER ARCHITECT'S RECOMMENDATION. ② PREPARE AND PAINT EXTENTS OF PREVIOUSLY-PAINTED BRICK. ③ DISASSEMBLE AND SALVAGE CAST IRON RAILINGS. DEMOLISH CONCRETE CURB. NEWEL POSTS AND BALUSTERS TO BE STRIPPED, PRIMED, AND REPAINTED OFF-SITE AND RE-INSTALLED. PROVIDE PAINTED STEEL TOP RAIL. PROVIDE CONCRETE BASE AND REINSTALL RAILING WHERE SHOWN. ④ REMOVE EXISTING AND PROVIDE NEW SEALANT IN JOINTS AT EXISTING STAIR. ⑤ ALUMINUM AND LAMINATED GLASS ENTRANCE CANOPY | <ol style="list-style-type: none"> ⑥ PROVIDE ACCESSIBLE ENTRANCE RAMP AND RAILING, SEE PLANS. ⑦ PROVIDE BUILDING SIGNAGE ⑧ PROVIDE WALL-MOUNTED FLAGPOLES ⑨ REMOVE AWNING ⑩ REMOVE SURFACE-MOUNTED FIXTURES, SIGNS, AND EQUIPMENT. PATCH AND REPAIR ANCHOR HOLES. ⑪ REMOVE GLASS AND RETROFIT EXISTING WINDOW FRAME AND OPENING TO ACCOMMODATE NEW ENTRANCE. ⑫ REMOVE SOLID INFILL PANELS AND PROVIDE GLAZING. | <ol style="list-style-type: none"> ⑬ REMOVE AND REPLACE PAINTED STEEL RAILING AND CONCRETE CURB BASE. ⑭ DEMOLISH AND REMOVE EXISTING FIRE ESCAPE STAIR AND ALL ASSOCIATED ANCHOR BRACKETS AND FASTENERS. PATCH AND REPAIR BRICK AT ANCHOR LOCATIONS. ⑮ REMOVE AND REPLACE WINDOW SASH WITH WOOD SASH ⑯ REMOVE VENT/FAN IN EXISTING WINDOW SASH AND REPLACE WITH NEW GLAZING. ⑰ DEMOLISH AND REMOVE EXISTING WINDOW AND PROVIDE NEW WINDOW ASSEMBLY TO MATCH EXISTING ADJACENT. ⑱ PROVIDE METAL PANEL CLADDING ⑲ PROVIDE ALUMINUM LOUVER ASSEMBLY AND FRAME ⑳ REMOVE GANTRY BEAM ㉑ PROVIDE ALUMINUM LOUVER ASSEMBLY IN EXISTING OPENING ㉒ REMOVE STANDPIPE ㉓ STRIP AND CLEAN STONE, SEE GENERAL NOTE #3 ㉔ PAINT EXISTING WOOD CLADDING ㉕ REGLAZE WINDOWS WITH FROSTED GLASS ㉖ COOLING TOWER ㉗ PROVIDE ALUMINUM STOREFRONT SYSTEM WITH MEDIUM STILE DOORS, PAINTED FINISH |
|--|---|--|



EAST ELEVATION

COPYRIGHT © 2011 KAHLER SLATER, INC. ALL RIGHTS RESERVED.



ELEVATION GENERAL NOTES

- 1. EXTERIOR WINDOW SASHES, FRAMES, SILLS, AND MOLDINGS TO BE SCRAPED, SANDED, REPUTTIED, SEALED, AND REPAINTED. ROTTEN SASH MEMBERS SHALL BE REPAIRED OR REPLACED IN KIND. REPLACE CRACKED OR BROKEN GLASS. REGLAZE LOOSE OR MISSING PUTTY. ROTTEN SILLS SHALL BE REPAIRED WITH ABATRON LIQUIDWOOD AND WOODPOX. PRIME BARE WOOD AND APPLY TWO TOPCOATS OF EXTERIOR LATEX PAINT. OPERABLE SASHES ARE TO BE FIXED IN CLOSED POSITION. PROVIDE SEALANT AT PERIMETER OF ALL SASHES. PROVIDE SEALANT AT PERIMETER OF WINDOW FRAME, BETWEEN WOOD AND STONE. REATTACH LOOSE WINDOW HARDWARE. PROVIDE NEW FIXED ALUMINUM STORM LITE AT INTERIOR SIDE OF WINDOW ASSEMBLY.
- 2. REMOVE ABANDONED CONDUIT, PIPING, SIGNAGE, ANCHORS AND FASTENERS FROM BUILDING FACADES. PATCH HOLES TO MATCH SURROUNDING MATERIALS.
- 3. EXTERIOR GRANITE TO BE STRIPPED, CLEANED AND REPOINTED. REMOVE EXISTING PAINT WITH CHEMICAL PAINT STRIPPER AS MANUFACTURED BY CATHEDRAL STONE PRODUCTS, OR EQUAL. RINSE WITH LOW-PRESSURE WASH. FOLLOWING PAINT REMOVAL, CLEAN STONE WITH ENVIRO KLEAN SAFRESTORER AS MANUFACTURED BY PROSOCO OR EQUAL. RINSE WITH LOW-PRESSURE WASH. PROTECT ADJACENT SURFACES FROM OVER-SPRAY. REPOINT MASONRY WHERE EXISTING MORTAR IS LOOSE, DAMAGED, MISSING OR HAS BEEN REPLACED WITH SEALANT, WITH COMPATIBLE MORTAR; PROFILE TO MATCH ORIGINAL PROFILE. INCLUDING "BEAD" PROFILE WHERE APPLICABLE.
- 4. SKYWARD-FACING JOINTS AT GRANITE (PARAPET CAPS, WINDOW SILLS, ETC.) SHALL BE CUT OUT AND REPLACED WITH SEALANT AND BOND BREAKER.
- 5. EXTERIOR BRICK (NORTH AND WEST FACADES) SHALL BE REPOINTED WHERE EXISTING MORTAR IS LOOSE, DAMAGED, MISSING OR HAS BEEN REPLACED WITH SEALANT. USE CAUTION WHEN CUTTING JOINTS TO NOT DAMAGE SURROUNDING BRICK; USE OF POWER TOOLS TO CUT VERTICAL MORTAR JOINTS MAY BE PROHIBITED.
- 6. REMOVE ALL ABANDONED CONDUIT, FASTENERS, SIGNS, AND OTHER SURFACE-MOUNTED FIXTURES.


ELEVATION KEYED NOTES

- ① REBUILD PARAPET PER STRUCTURAL ENGINEER ARCHITECT'S RECOMMENDATION.
- ② PREPARE AND PAINT EXTENTS OF PREVIOUSLY-PAINTED BRICK.
- ③ DISASSEMBLE AND SALVAGE CAST IRON RAILINGS. DEMOLISH CONCRETE CURB, NEWEL POSTS AND BALUSTERS TO BE STRIPPED, PRIMED, AND REPAINTED OFF-SITE AND RE-INSTALLED. PROVIDE PAINTED STEEL TOP RAIL. PROVIDE CONCRETE BASE AND REINSTALL RAILING WHERE SHOWN.
- ④ REMOVE EXISTING AND PROVIDE NEW SEALANT IN JOINTS AT EXISTING STAIR.
- ⑤ ALUMINUM AND LAMINATED GLASS ENTRANCE CANOPY
- ⑥ PROVIDE ACCESSIBLE ENTRANCE RAMP AND RAILING, SEE PLANS.
- ⑦ PROVIDE BUILDING SIGNAGE
- ⑧ PROVIDE WALL-MOUNTED FLAGPOLES
- ⑨ REMOVE AWNING
- ⑩ REMOVE SURFACE-MOUNTED FIXTURES, SIGNS, AND EQUIPMENT. PATCH AND REPAIR ANCHOR HOLES.
- ⑪ REMOVE GLASS AND RETROFIT EXISTING WINDOW FRAME AND OPENING TO ACCOMMODATE NEW ENTRANCE.
- ⑫ REMOVE SOLID INFILL PANELS AND PROVIDE GLAZING.
- ⑬ REMOVE AND REPLACE PAINTED STEEL RAILING AND CONCRETE CURB BASE.
- ⑭ DEMOLISH AND REMOVE EXISTING FIRE ESCAPE STAIR AND ALL ASSOCIATED ANCHOR BRACKETS AND FASTENERS. PATCH AND REPAIR BRICK AT ANCHOR LOCATIONS.
- ⑮ REMOVE AND REPLACE WINDOW SASH WITH WOOD SASH
- ⑯ REMOVE VENT/FAN IN EXISTING WINDOW SASH AND REPLACE WITH NEW GLAZING.
- ⑰ DEMOLISH AND REMOVE EXISTING WINDOW AND PROVIDE NEW WINDOW ASSEMBLY TO MATCH EXISTING ADJACENT.
- ⑱ PROVIDE METAL PANEL CLADDING
- ⑲ PROVIDE ALUMINUM LOUVER ASSEMBLY AND FRAME
- ⑳ REMOVE GANTRY BEAM
- ㉑ PROVIDE ALUMINUM LOUVER ASSEMBLY IN EXISTING OPENING
- ㉒ REMOVE STANDPIPE
- ㉓ STRIP AND CLEAN STONE. SEE GENERAL NOTE #3
- ㉔ PAINT EXISTING WOOD CLADDING
- ㉕ REGLAZE WINDOWS WITH FROSTED GLASS
- ㉖ COOLING TOWER
- ㉗ PROVIDE ALUMINUM STOREFRONT SYSTEM WITH MEDIUM STILE DOORS, PAINTED FINISH



SOUTH ELEVATION

COPYRIGHT © 2011 KAHLER SLATER, INC. ALL RIGHTS RESERVED.

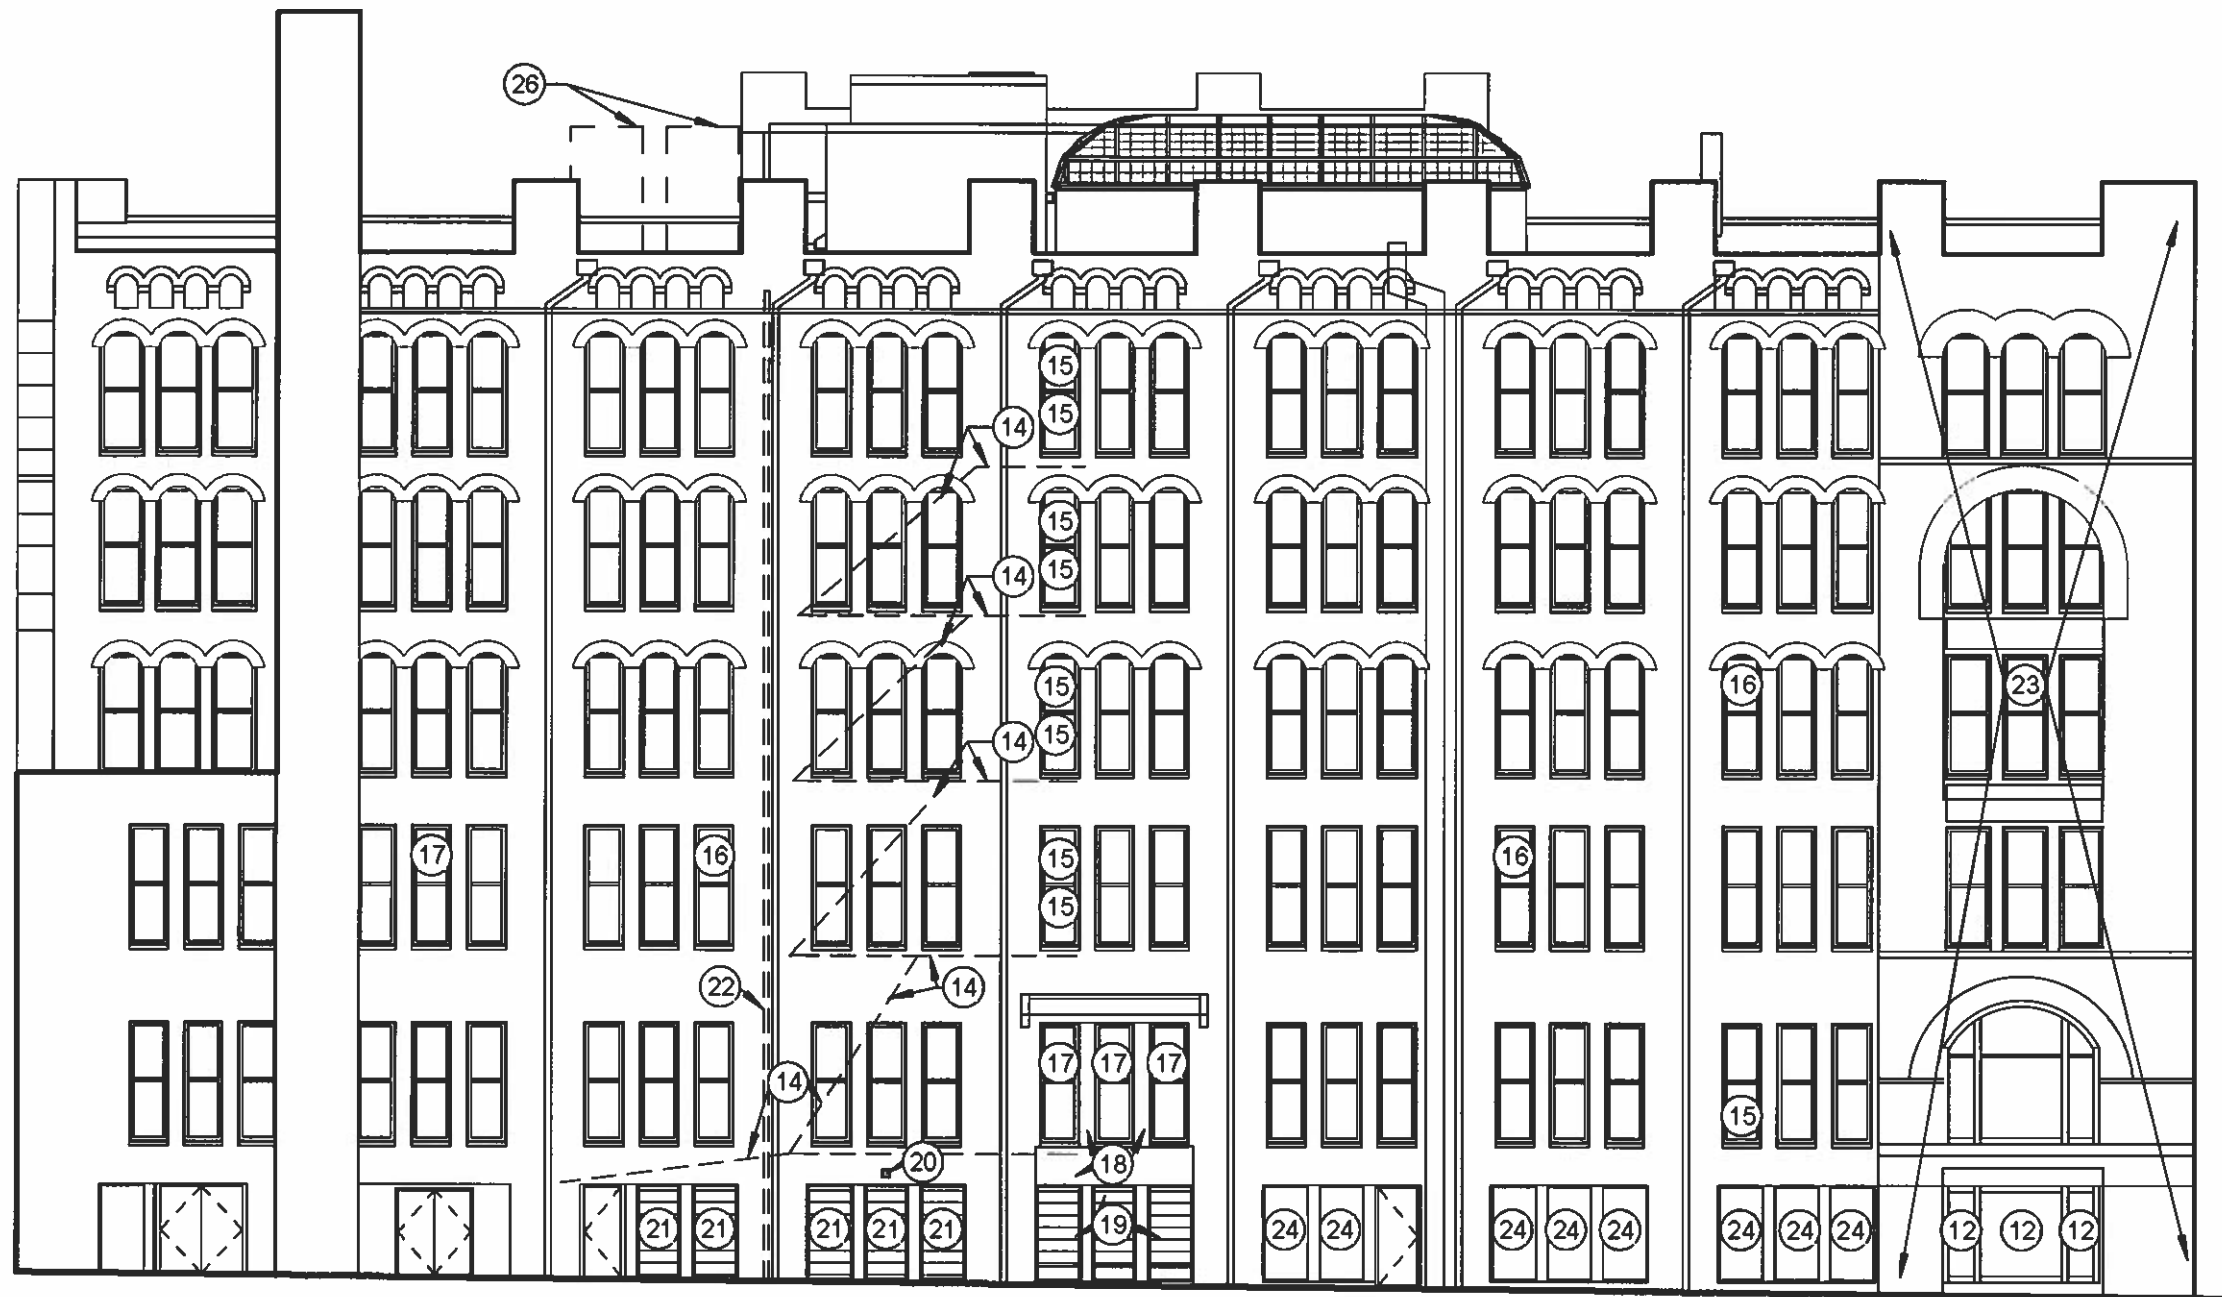

ELEVATION GENERAL NOTES

1. EXTERIOR WINDOW SASHES, FRAMES, SILLS, AND MOLDINGS TO BE SCRAPPED, SANDED, REPUTTIED, SEALED, AND REPAINTED. ROTTEN SASH MEMBERS SHALL BE REPAIRED OR REPLACED IN KIND. REPLACE CRACKED OR BROKEN GLASS. REGLAZE LOOSE OR MISSING PUTTY. ROTTEN SILLS SHALL BE REPAIRED WITH ABATRON LIQUIDWOOD AND WODDEPOX. PRIME BARE WOOD AND APPLY TWO TOPCOATS OF EXTERIOR LATEX PAINT. OPERABLE SASHES ARE TO BE FIXED IN CLOSED POSITION. PROVIDE SEALANT AT PERIMETER OF ALL SASHES. PROVIDE SEALANT AT PERIMETER OF WINDOW FRAME, BETWEEN WOOD AND STONE. REATTACH LOOSE WINDOW HARDWARE. PROVIDE NEW FIXED ALUMINUM STORM LITE AT INTERIOR SIDE OF WINDOW ASSEMBLY.

2. REMOVE ABANDONED CONDUIT, PIPING, SIGNAGE, ANCHORS AND FASTENERS FROM BUILDING FACADES. PATCH HOLES TO MATCH SURROUNDING MATERIALS.

3. EXTERIOR GRANITE TO BE STRIPPED, CLEANED AND REPOINTED. REMOVE EXISTING PAINT WITH CHEMICAL PAINT STRIPPER AS MANUFACTURED BY CATHEDRAL STONE PRODUCTS, OR EQUAL. RINSE WITH LOW-PRESSURE WASH. FOLLOWING PAINT REMOVAL, CLEAN STONE WITH ENVIRO KLEAN SAFRESTORER AS MANUFACTURED BY PROSOCO OR EQUAL. RINSE WITH LOW-PRESSURE WASH. PROTECT ADJACENT SURFACES FROM OVER-SPRAY. REPOINT MASONRY WHERE EXISTING MORTAR IS LOOSE, DAMAGED, MISSING OR HAS BEEN REPLACED WITH SEALANT, WITH COMPATIBLE MORTAR; PROFILE TO MATCH ORIGINAL PROFILE, INCLUDING "BEAD" PROFILE WHERE APPLICABLE.

4. SKYWARD-FACING JOINTS AT GRANITE (PARAPET CAPS, WINDOW SILLS, ETC.) SHALL BE CUT OUT AND REPLACED WITH SEALANT AND BOND BREAKER.

5. EXTERIOR BRICK (NORTH AND WEST FACADES) SHALL BE REPOINTED WHERE EXISTING MORTAR IS LOOSE, DAMAGED, MISSING OR HAS BEEN REPLACED WITH SEALANT. USE CAUTION WHEN CUTTING JOINTS TO NOT DAMAGE SURROUNDING BRICK; USE OF POWER TOOLS TO CUT VERTICAL MORTAR JOINTS MAY BE PROHIBITED.

6. REMOVE ALL ABANDONED CONDUIT, FASTENERS, SIGNS, AND OTHER SURFACE-MOUNTED FIXTURES.

ELEVATION KEYED NOTES

1 REBUILD PARAPET PER STRUCTURAL ENGINEER ARCHITECT'S RECOMMENDATION.

2 PREPARE AND PAINT EXTENTS OF PREVIOUSLY-PAINTED BRICK.

3 DISASSEMBLE AND SALVAGE CAST IRON RAILINGS. DEMOLISH CONCRETE CURB, NEWEL POSTS AND BALUSTERS TO BE STRIPPED, PRIMED, AND REPAINTED OFF-SITE AND RE-INSTALLED. PROVIDE PAINTED STEEL TOP RAIL. PROVIDE CONCRETE BASE AND REINSTALL RAILING WHERE SHOWN.

4 REMOVE EXISTING AND PROVIDE NEW SEALANT IN JOINTS AT EXISTING STAIR.

5 ALUMINUM AND LAMINATED GLASS ENTRANCE CANOPY

6 PROVIDE ACCESSIBLE ENTRANCE RAMP AND RAILING, SEE PLANS.

7 PROVIDE BUILDING SIGNAGE

8 PROVIDE WALL-MOUNTED FLAGPOLES

9 REMOVE AWNING

10 REMOVE SURFACE-MOUNTED FIXTURES, SIGNS, AND EQUIPMENT. PATCH AND REPAIR ANCHOR HOLES.

11 REMOVE GLASS AND RETROFIT EXISTING WINDOW FRAME AND OPENING TO ACCOMMODATE NEW ENTRANCE.

12 REMOVE SOLID INFILL PANELS AND PROVIDE GLAZING.

13 REMOVE AND REPLACE PAINTED STEEL RAILING AND CONCRETE CURB BASE.

14 DEMOLISH AND REMOVE EXISTING FIRE ESCAPE STAIR AND ALL ASSOCIATED ANCHOR BRACKETS AND FASTENERS. PATCH AND REPAIR BRICK AT ANCHOR LOCATIONS.

15 REMOVE AND REPLACE WINDOW SASH WITH WOOD SASH

16 REMOVE VENT/FAN IN EXISTING WINDOW SASH AND REPLACE WITH NEW GLAZING.

17 DEMOLISH AND REMOVE EXISTING WINDOW AND PROVIDE NEW WINDOW ASSEMBLY TO MATCH EXISTING ADJACENT.

18 PROVIDE METAL PANEL CLADDING

19 PROVIDE ALUMINUM LOUVER ASSEMBLY AND FRAME

20 REMOVE GANTRY BEAM

21 PROVIDE ALUMINUM LOUVER ASSEMBLY IN EXISTING OPENING

22 REMOVE STANDPIPE


23 STRIP AND CLEAN STONE, SEE GENERAL NOTE #3

24 PAINT EXISTING WOOD CLADDING


25 REGLAZE WINDOWS WITH FROSTED GLASS

26 CODLING TOWER

27 PROVIDE ALUMINUM STOREFRONT SYSTEM WITH MEDIUM STILE DOORS, PAINTED FINISH



WEST ELEVATION

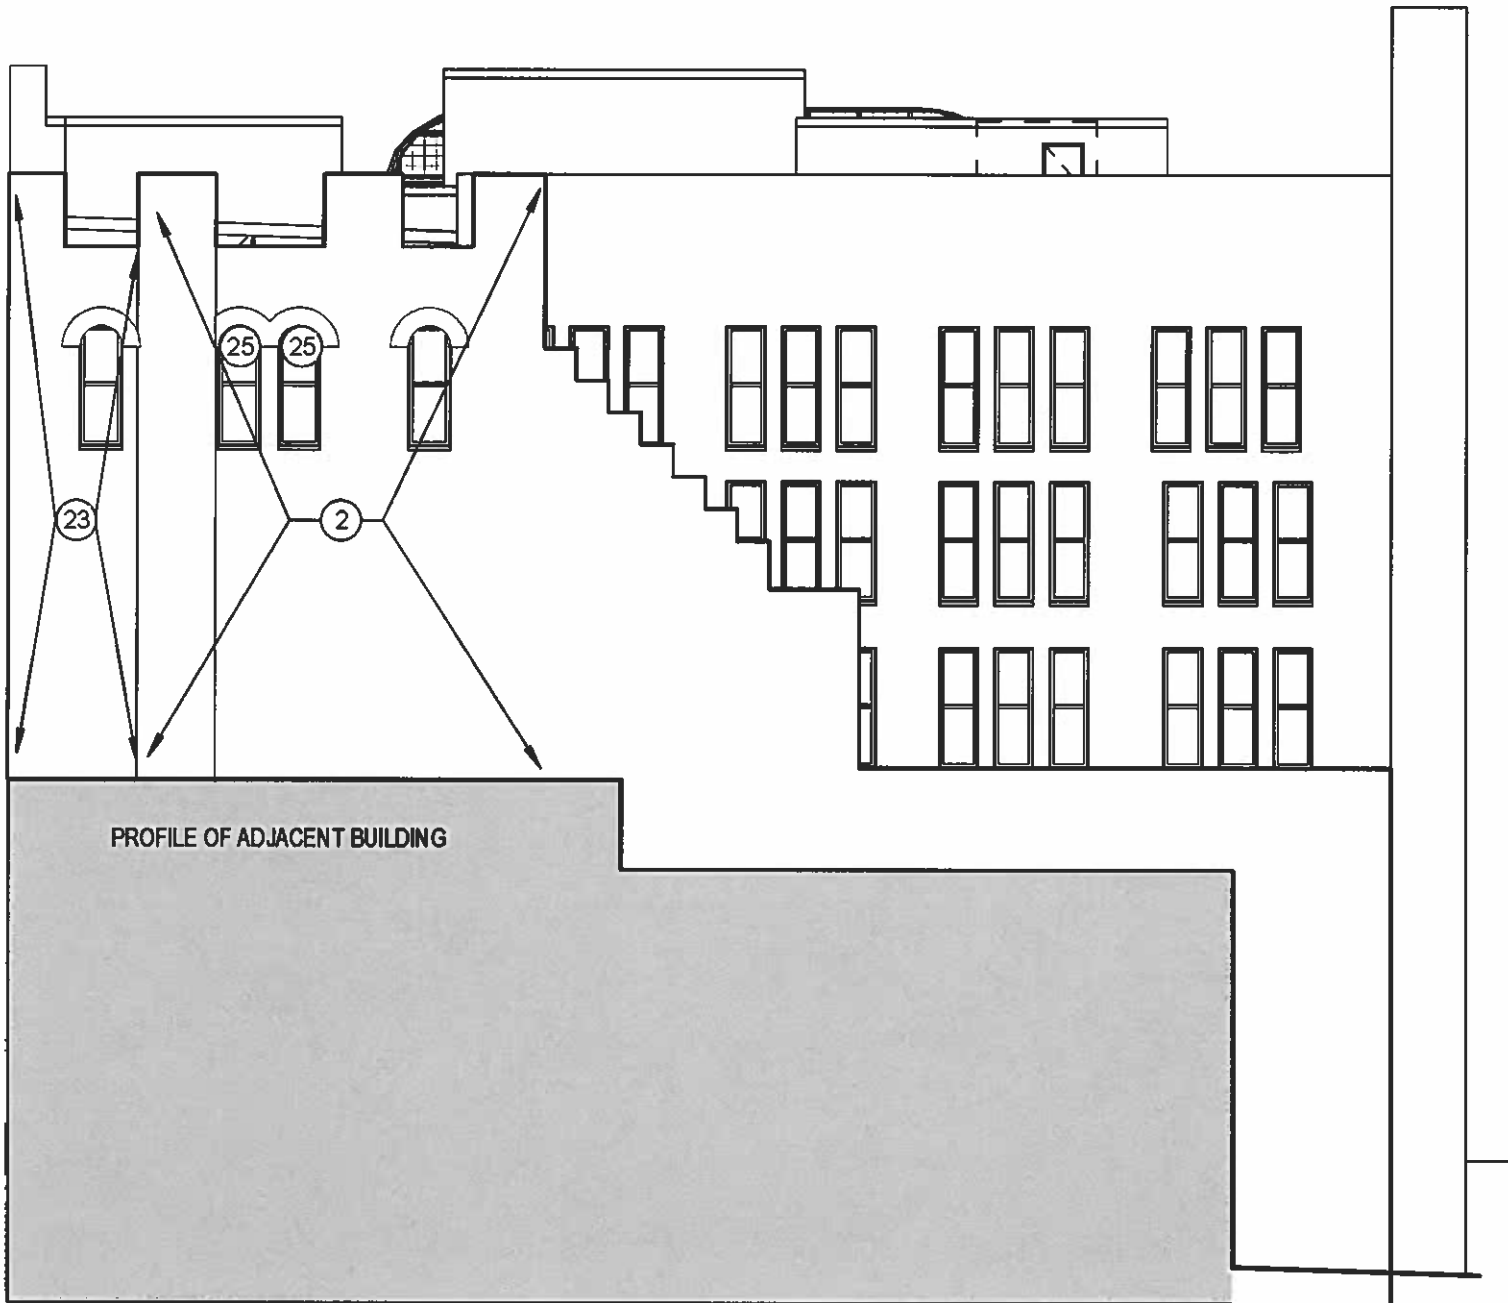

ELEVATION GENERAL NOTES

1. EXTERIOR WINDOW SASHES, FRAMES, SILLS, AND MOLDINGS TO BE SCRAPPED, SANDED, REPUTTIED, SEALED, AND REPAINTED. ROTTEN SASH MEMBERS SHALL BE REPAIRED OR REPLACED IN KIND. REPLACE CRACKED OR BROKEN GLASS. REGLAZE LOOSE OR MISSING PUTTY. ROTTEN SILLS SHALL BE REPAIRED WITH ABATRON LIQUIDWOOD AND WOODPOX. PRIME BARE WOOD AND APPLY TWO TOPCOATS OF EXTERIOR LATEX PAINT. OPERABLE SASHES ARE TO BE FIXED IN CLOSED POSITION. PROVIDE SEALANT AT PERIMETER OF ALL SASHES. PROVIDE SEALANT AT PERIMETER OF WINDOW FRAME, BETWEEN WOOD AND STONE. REATTACH LOOSE WINDOW HARDWARE. PROVIDE NEW FIXED ALUMINUM STORM LITE AT INTERIOR SIDE OF WINDOW ASSEMBLY.
2. REMOVE ABANDONED CONDUIT, PIPING, SIGNAGE, ANCHORS AND FASTENERS FROM BUILDING FACADES. PATCH HOLES TO MATCH SURROUNDING MATERIALS.
3. EXTERIOR GRANITE TO BE STRIPPED, CLEANED AND REPOINTED. REMOVE EXISTING PAINT WITH CHEMICAL PAINT STRIPPER AS MANUFACTURED BY CATHEDRAL STONE PRODUCTS, OR EQUAL. RINSE WITH LOW-PRESSURE WASH. FOLLOWING PAINT REMOVAL, CLEAN STONE WITH ENVIRO KLEAN SAFRESTORER AS MANUFACTURED BY PROSOCO OR EQUAL. RINSE WITH LOW-PRESSURE WASH. PROTECT ADJACENT SURFACES FROM OVER-SPRAY. REPOINT MASONRY WHERE EXISTING MORTAR IS LOOSE, DAMAGED, MISSING OR HAS BEEN REPLACED WITH SEALANT, WITH COMPATIBLE MORTAR; PROFILE TO MATCH ORIGINAL PROFILE, INCLUDING "BEAD" PROFILE WHERE APPLICABLE.
4. SKYWARD-FACING JOINTS AT GRANITE (PARAPET CAPS, WINDOW SILLS, ETC.) SHALL BE CUT OUT AND REPLACED WITH SEALANT AND BOND BREAKER.
5. EXTERIOR BRICK (NORTH AND WEST FACADES) SHALL BE REPOINTED WHERE EXISTING MORTAR IS LOOSE, DAMAGED, MISSING OR HAS BEEN REPLACED WITH SEALANT. USE CAUTION WHEN CUTTING JOINTS TO NOT DAMAGE SURROUNDING BRICK; USE OF POWER TOOLS TO CUT VERTICAL MORTAR JOINTS MAY BE PROHIBITED.
6. REMOVE ALL ABANDONED CONDUIT, FASTENERS, SIGNS, AND OTHER SURFACE-MOUNTED FIXTURES.

ELEVATION KEYED NOTES

- | | | |
|--|--|--|
| <ul style="list-style-type: none"> ① REBUILD PARAPET PER STRUCTURAL ENGINEER ARCHITECT'S RECOMMENDATION. ② PREPARE AND PAINT EXTENTS OF PREVIOUSLY-PAINTED BRICK. ③ DISASSEMBLE AND SALVAGE CAST IRON RAILINGS. DEMOLISH CONCRETE CURB. NEWEL POSTS AND BALUSTERS TO BE STRIPPED, PRIMED, AND REPAINTED OFF-SITE AND RE-INSTALLED. PROVIDE PAINTED STEEL TOP RAIL. PROVIDE CONCRETE BASE AND REINSTALL RAILING WHERE SHOWN. ④ REMOVE EXISTING AND PROVIDE NEW SEALANT IN JOINTS AT EXISTING STAIR. ⑤ ALUMINUM AND LAMINATED GLASS ENTRANCE CANOPY | <ul style="list-style-type: none"> ⑥ PROVIDE ACCESSIBLE ENTRANCE RAMP AND RAILING. SEE PLANS ⑦ PROVIDE BUILDING SIGNAGE ⑧ PROVIDE WALL-MOUNTED FLAGPOLES ⑨ REMOVE AWNING ⑩ REMOVE SURFACE-MOUNTED FIXTURES, SIGNS, AND EQUIPMENT. PATCH AND REPAIR ANCHOR HOLES. ⑪ REMOVE GLASS AND RETROFIT EXISTING WINDOW FRAME AND OPENING TO ACCOMMODATE NEW ENTRANCE. ⑫ REMOVE SOLID INFILL PANELS AND PROVIDE GLAZING. | <ul style="list-style-type: none"> ⑬ REMOVE AND REPLACE PAINTED STEEL RAILING AND CONCRETE CURB BASE. ⑭ DEMOLISH AND REMOVE EXISTING FIRE ESCAPE STAIR AND ALL ASSOCIATED ANCHOR BRACKETS AND FASTENERS. PATCH AND REPAIR BRICK AT ANCHOR LOCATIONS. ⑮ REMOVE AND REPLACE WINDOW SASH WITH WOOD SASH ⑯ REMOVE VENT/FAN IN EXISTING WINDOW SASH AND REPLACE WITH NEW GLAZING. ⑰ DEMOLISH AND REMOVE EXISTING WINDOW AND PROVIDE NEW WINDOW ASSEMBLY TO MATCH EXISTING ADJACENT. ⑱ PROVIDE METAL PANEL CLADDING ⑲ PROVIDE ALUMINUM LOUVER ASSEMBLY AND FRAME ⑳ REMOVE GANTRY BEAM ㉑ PROVIDE ALUMINUM LOUVER ASSEMBLY IN EXISTING OPENING ㉒ REMOVE STANDPIPE ㉓ STRIP AND CLEAN STONE, SEE GENERAL NOTE #3 ㉔ PAINT EXISTING WOOD CLADDING ㉕ REGLAZE WINDOWS WITH FROSTED GLASS ㉖ COOLING TOWER ㉗ PROVIDE ALUMINUM STOREFRONT SYSTEM WITH MEDIUM STILE DOORS, PAINTED FINISH |
|--|--|--|




NORTH ELEVATION

COPYRIGHT © 2011 KAHLER SLATER, INC. ALL RIGHTS RESERVED.

COPYRIGHT © 2011 KAHLER SLATER, INC. ALL RIGHTS RESERVED.

EAST MICHIGAN STREET

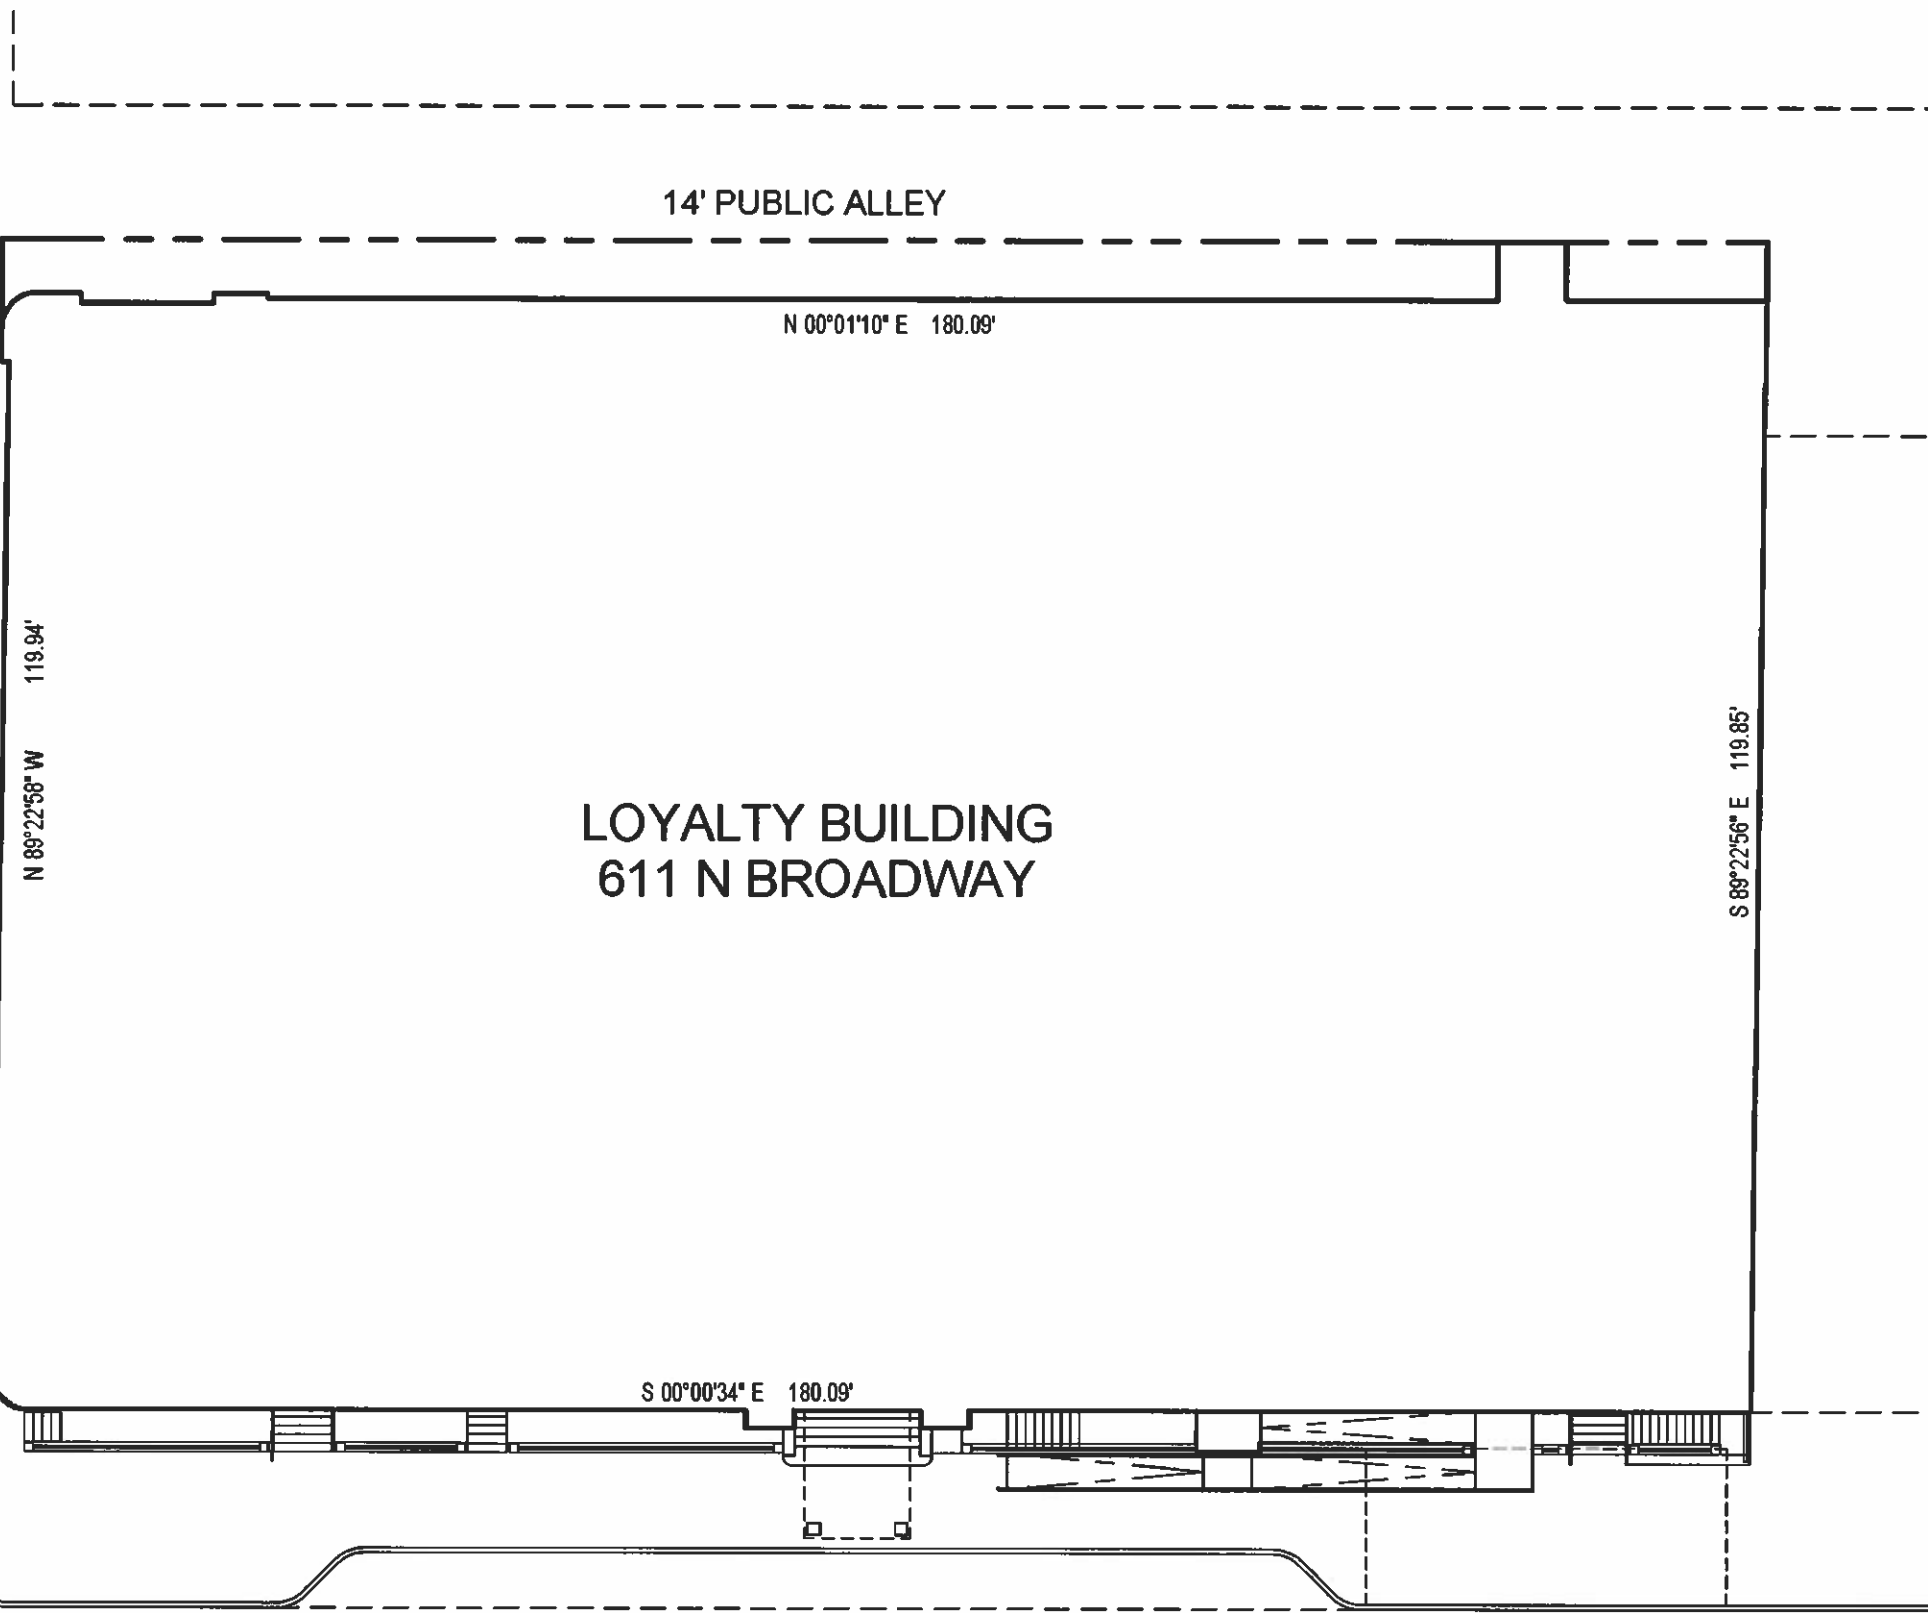

LOYALTY BUILDING
611 N BROADWAY


14' PUBLIC ALLEY

N 00°01'10" E 180.09'



N 89°22'58" W 119.94'

S 88°22'56" E 119.85'

S 00°00'34" E 180.09'



ARCHITECTURAL SITE PLAN

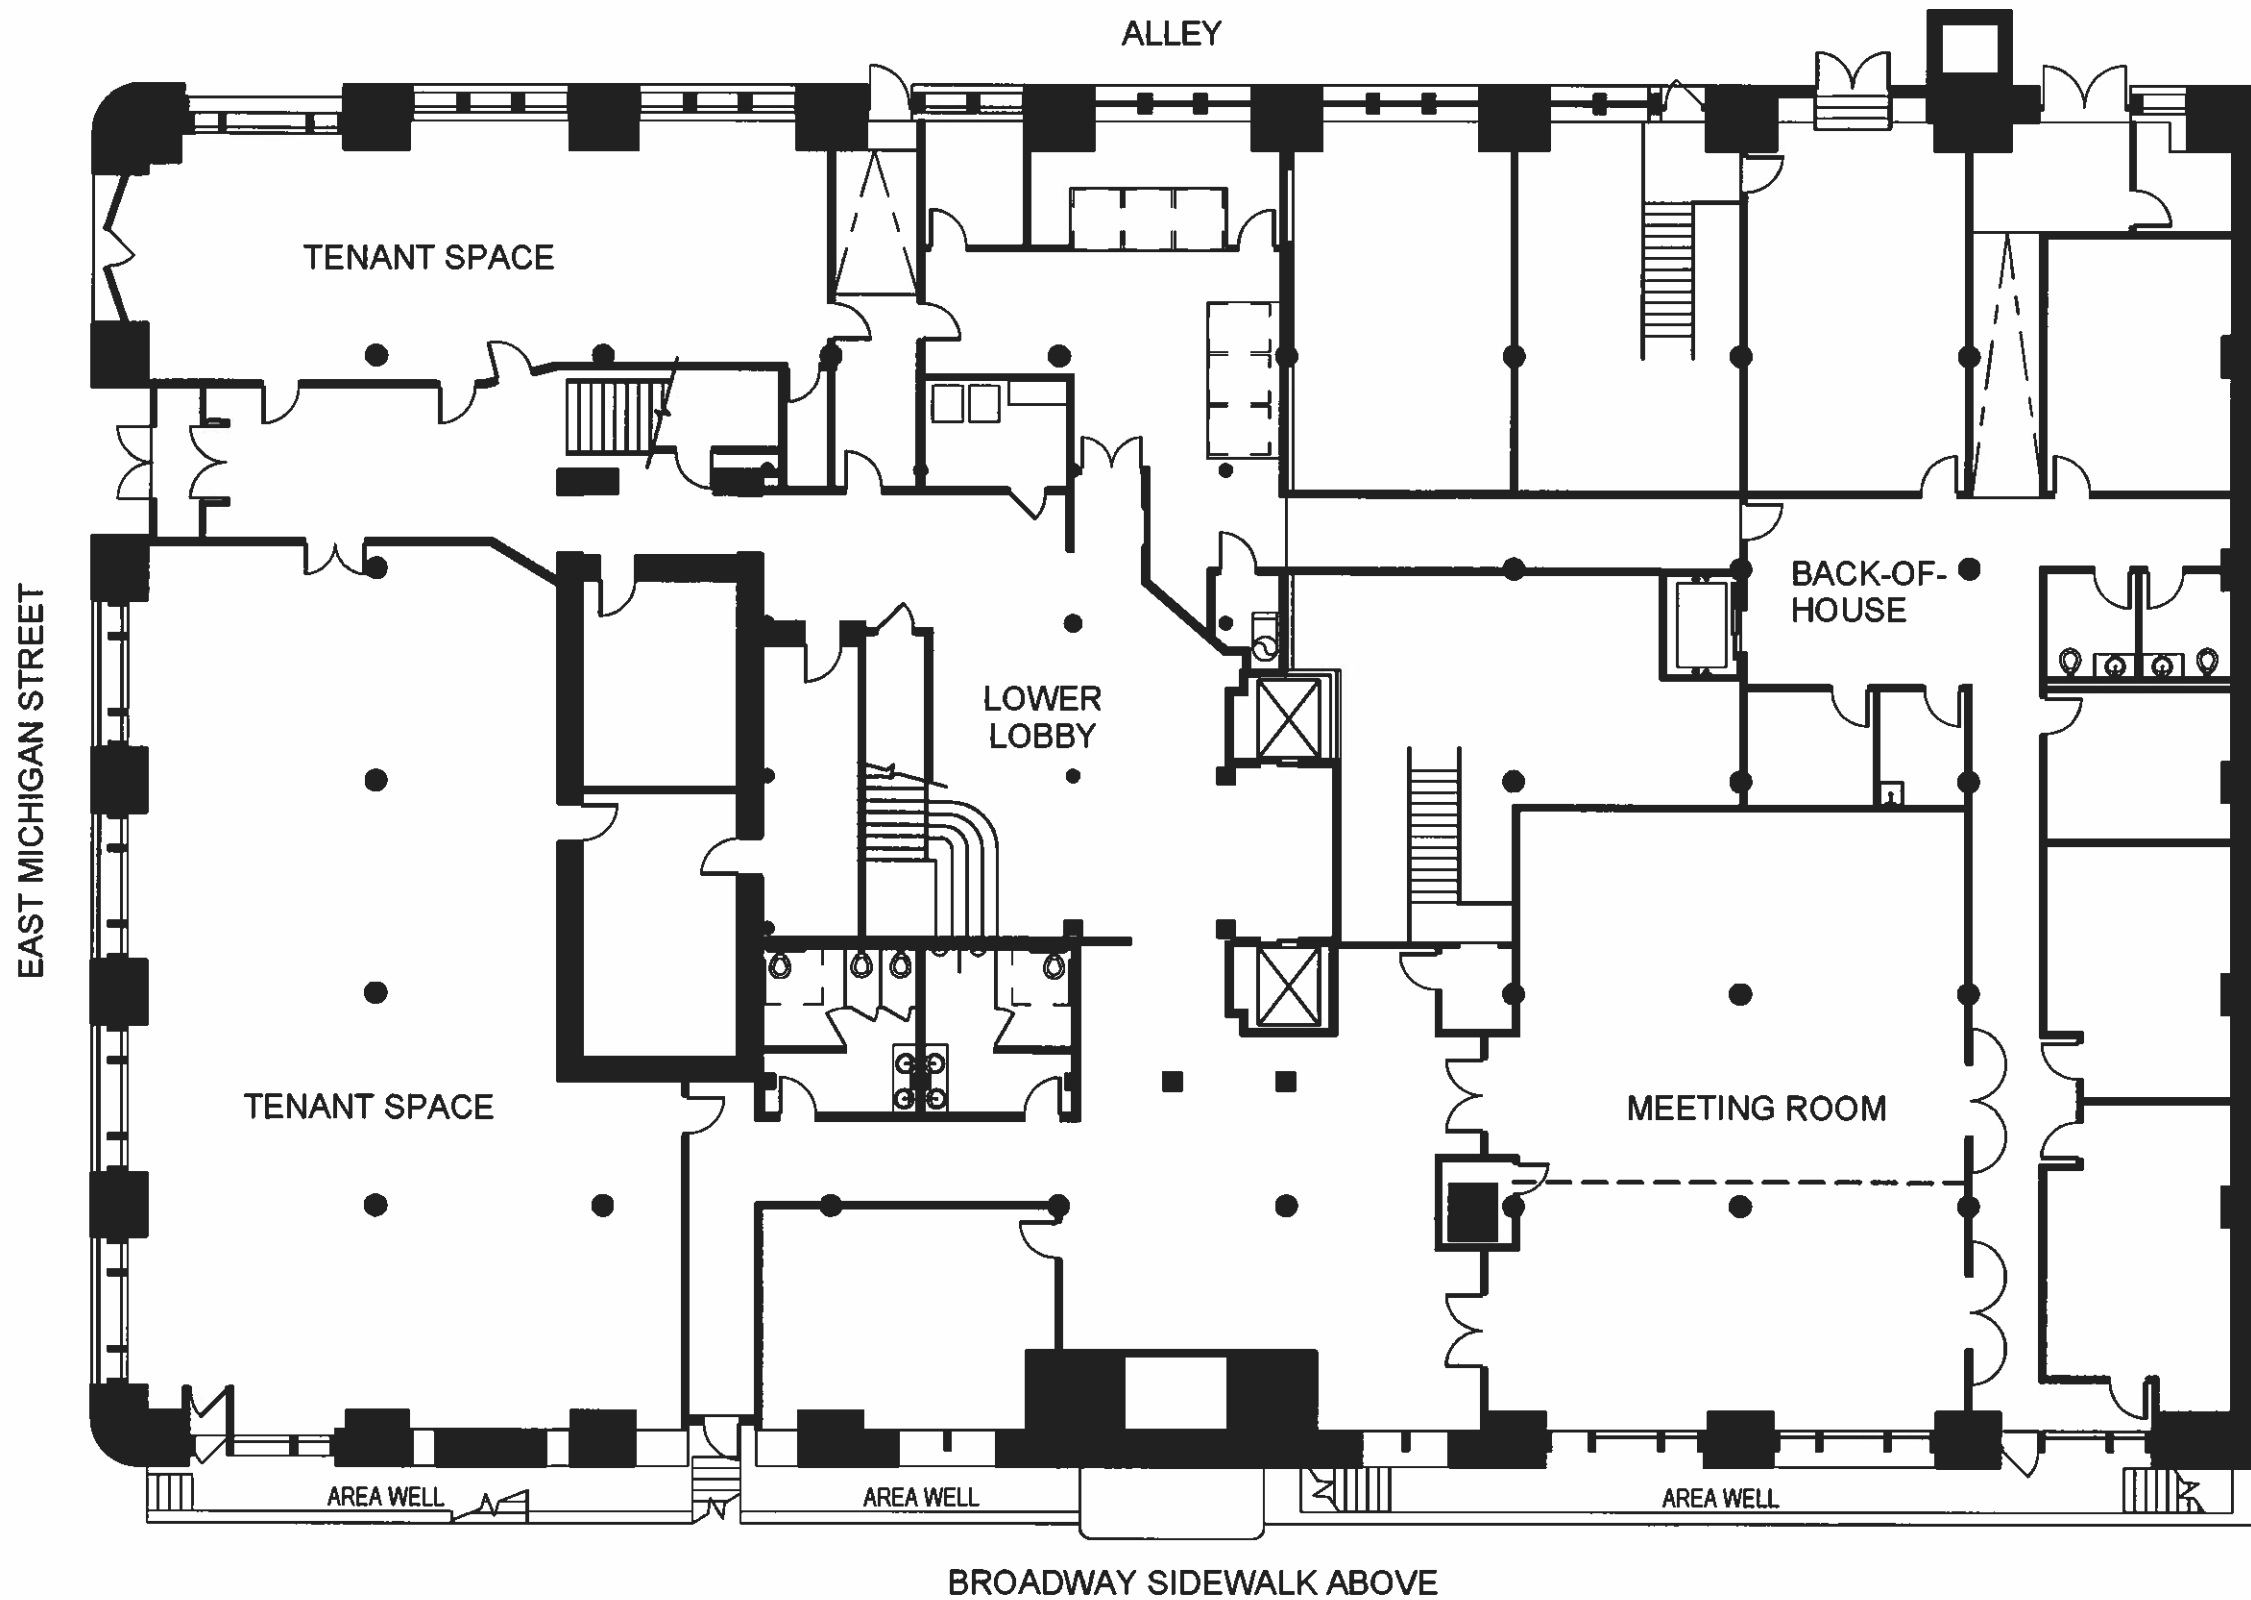


GROUND FLOOR PLAN

COPYRIGHT © 2011 KAHLER SLATER, INC. ALL RIGHTS RESERVED.

COPYRIGHT © 2011 KAHLER SLATER, INC. ALL RIGHTS RESERVED.

EAST MICHIGAN STREET

ALLEY

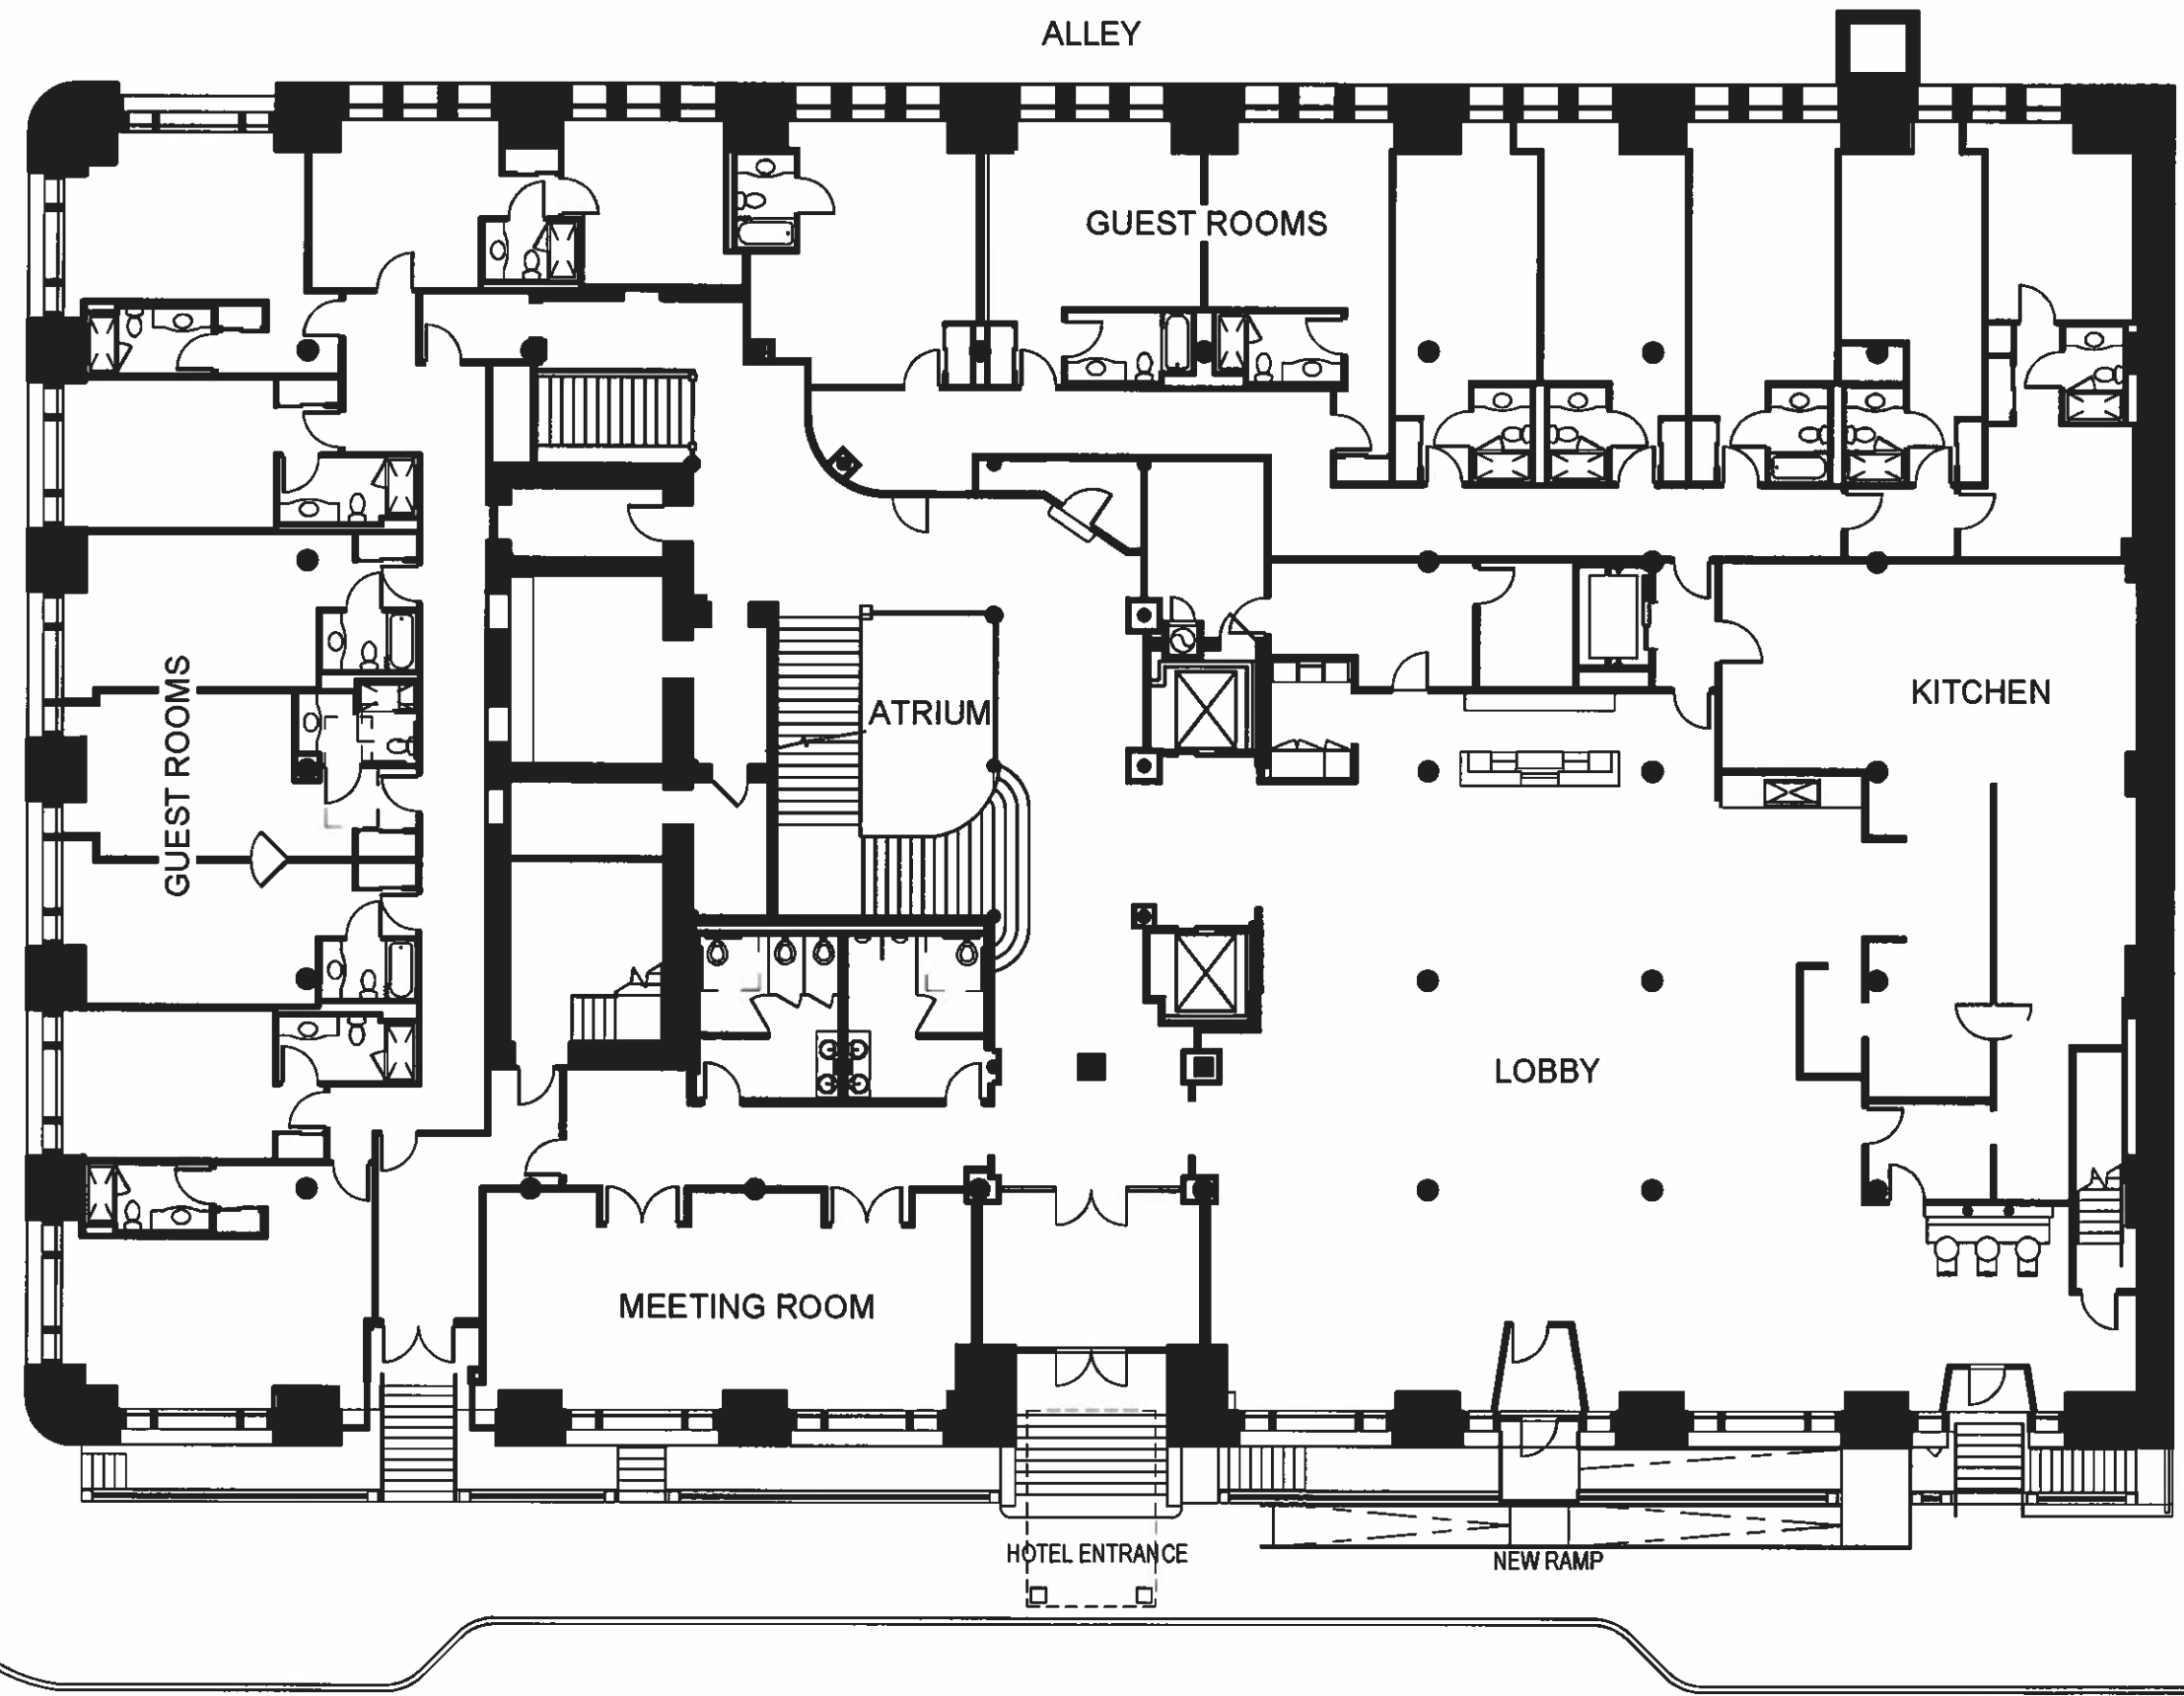

GUEST ROOMS

GUEST ROOMS

ATRIUM

KITCHEN

LOBBY

MEETING ROOM


HOTEL ENTRANCE

NEW RAMP

NORTH BROADWAY




1ST FLOOR PLAN

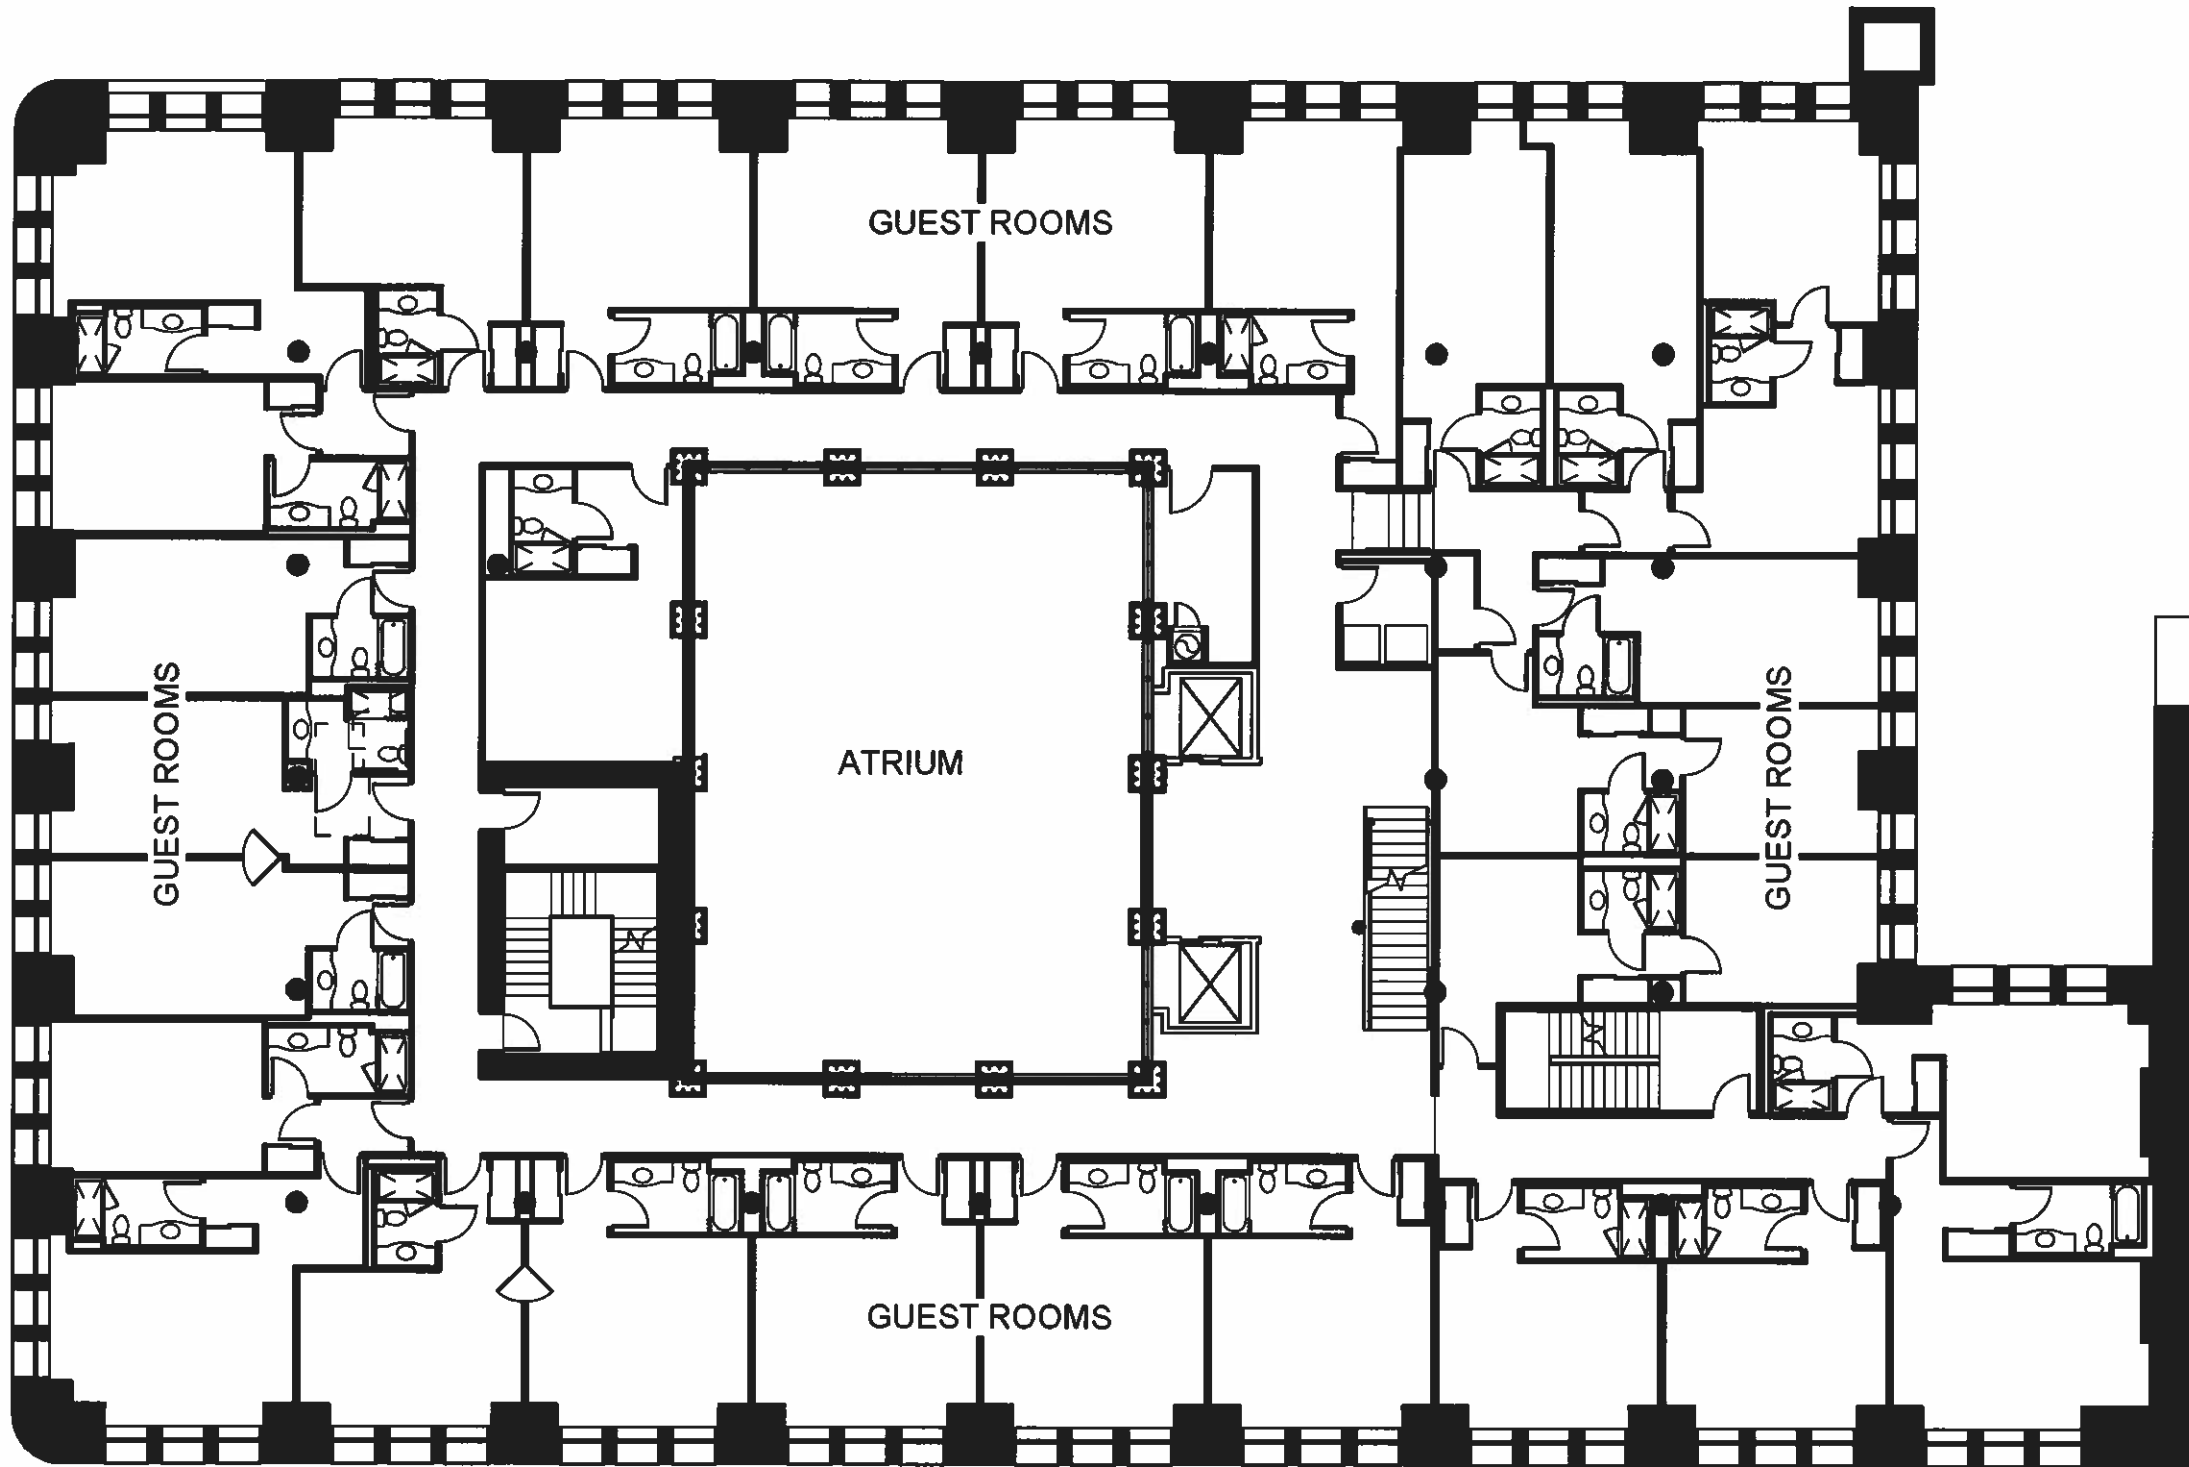


COPYRIGHT © 2011 KAHLER SLATER, INC. ALL RIGHTS RESERVED.


Kahler Slater
experience design



4TH FLOOR PLAN (2ND, 3RD AND 5TH SIMILAR)

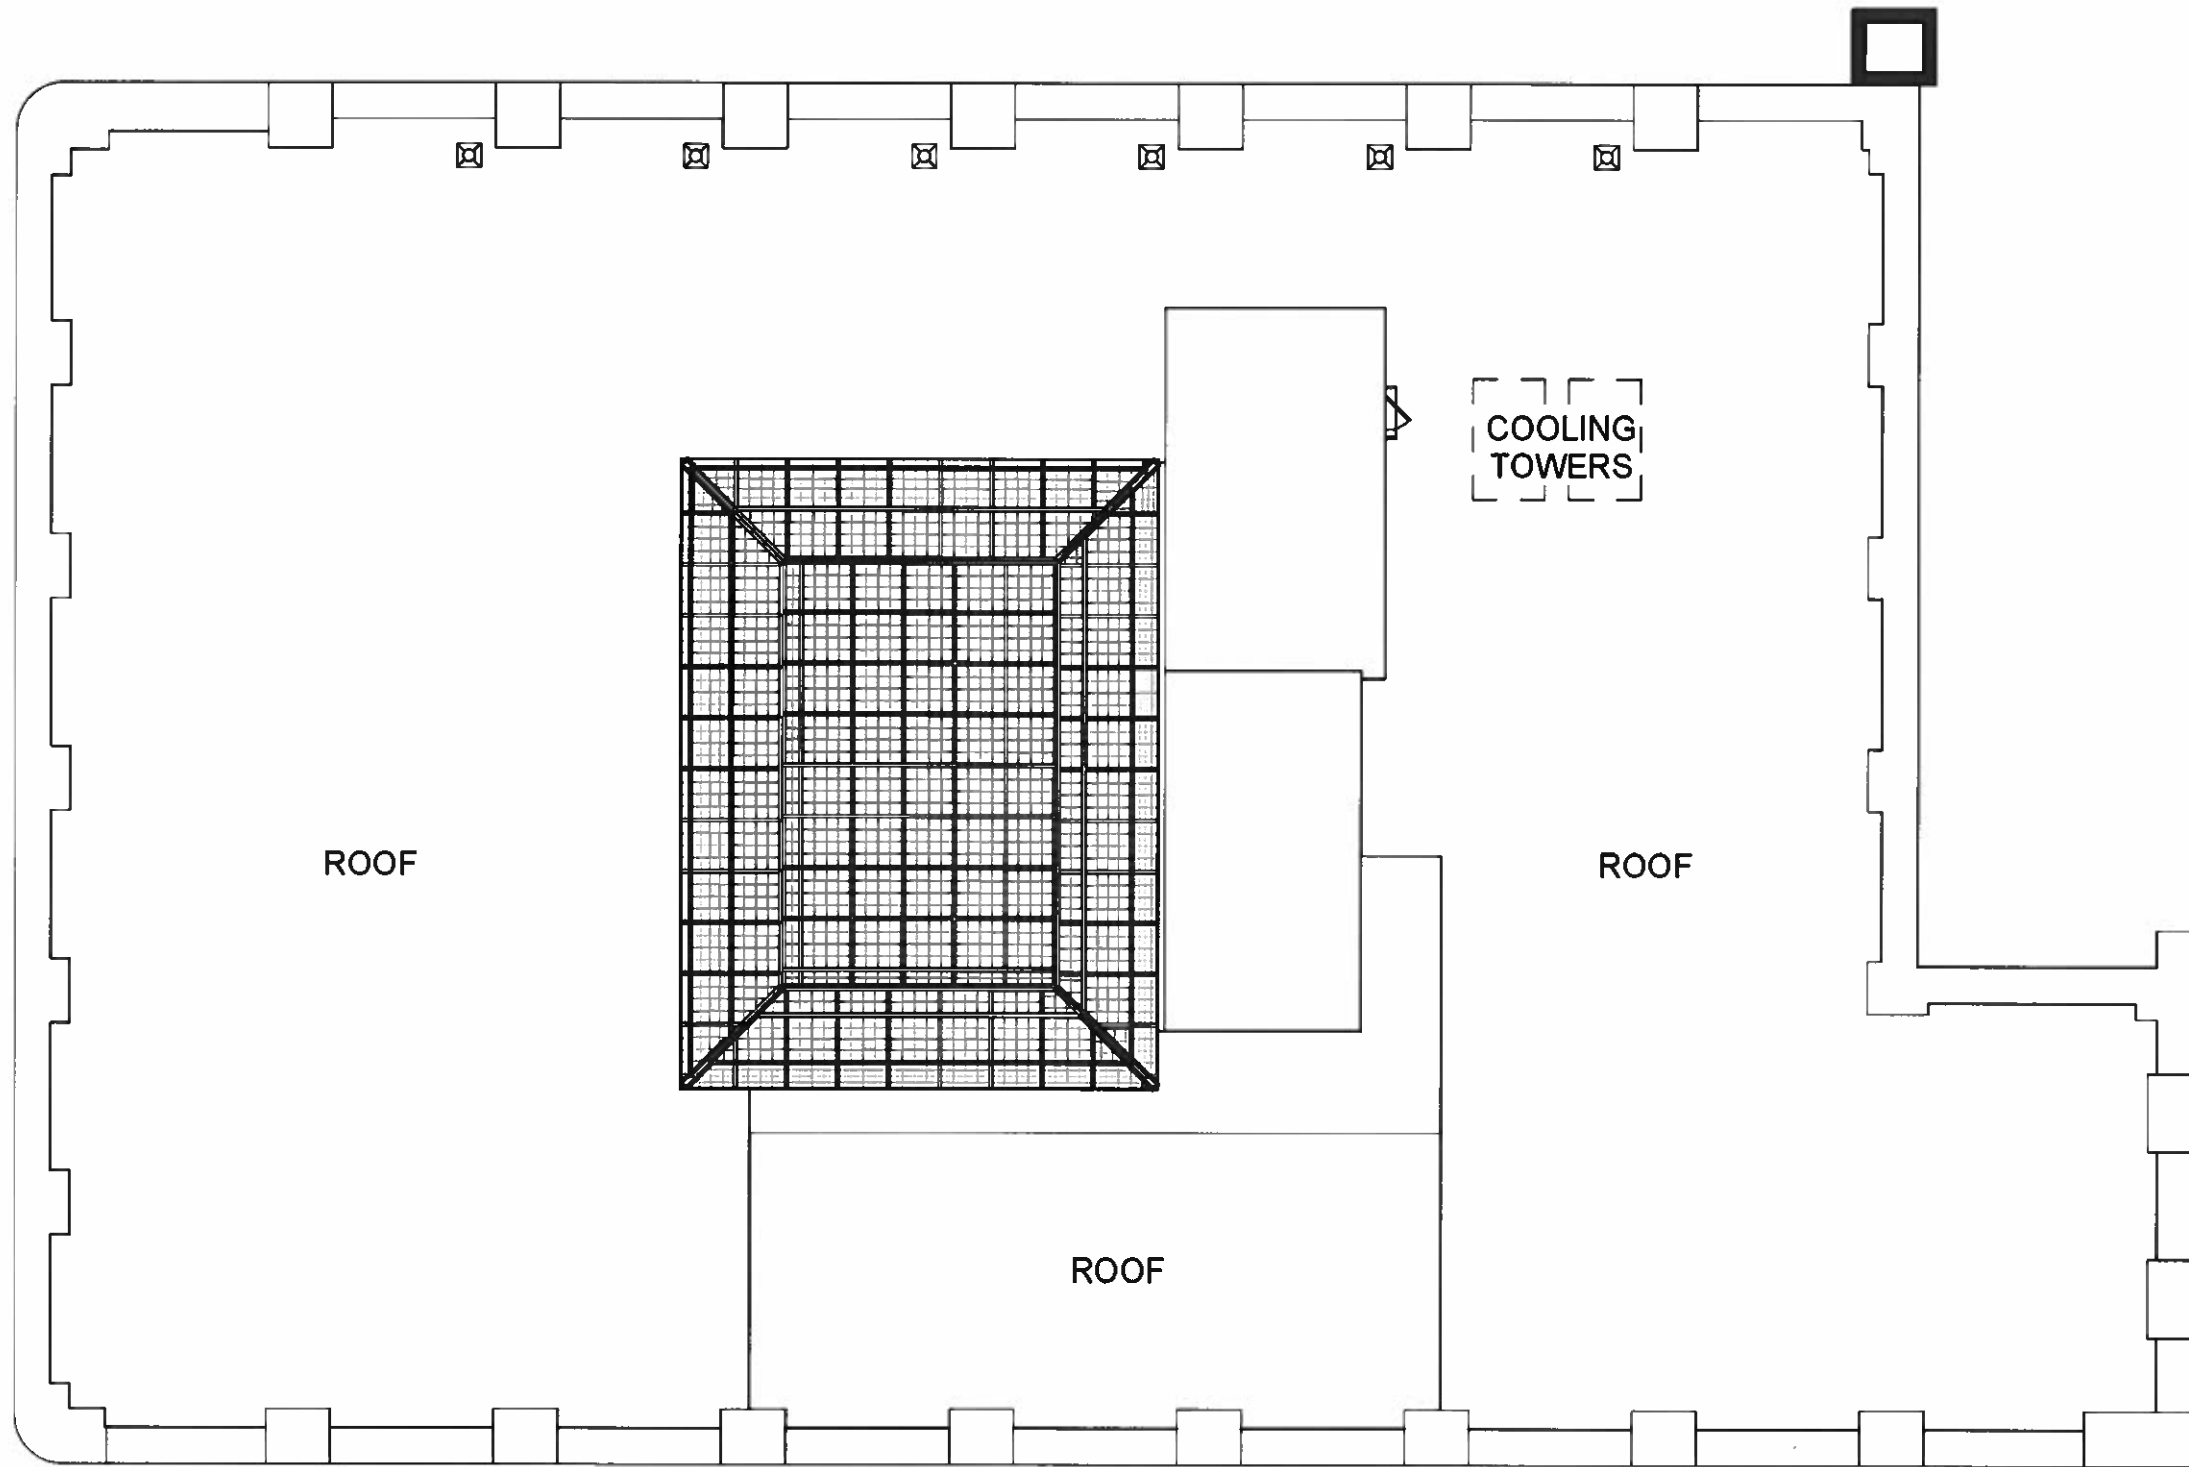

COPYRIGHT © 2011 KAHLER SLATER, INC. ALL RIGHTS RESERVED.



ROOF PLAN



COPYRIGHT © 2011 KAHLER SLATER, INC. ALL RIGHTS RESERVED.

Kahler Slater
experience design

BROADWAY ENTRANCE

LOYALTY BUILDING HOTEL
611 N. BROADWAY

12