



Certificate of Appropriateness

Milwaukee Historic Preservation Commission/841 N Broadway/Milwaukee, WI 53202/phone 414-286-5722

Property Description of work

3330 W. Kilbourn Avenue., Concordia Historic District

Tearing off and replacing garage roof with Biscayne blue GAF Timberline HDZ shingles and replacing two sheets of plywood decking on the garage roof. Replacing a 3' x 24' section of flat roof on the house with rubber membrane roof. Replacing approximately 60' of soffit on the house while replicating the size and details of the materials used in the original and painting to match the existing color. Lining unused box gutters with vapor barrier and filling with insulation, reinstalling shingles over box gutters. Installing new flashing and drip edge along roof edges and add flashing to the bottom of the gable.

Date issued 6/6/23

In accordance with the provisions of Section 320-21 (11) and (12) of the Milwaukee Code of Ordinances, the Milwaukee Historic Preservation Commission has issued a certificate of appropriateness for the work listed above. The work was found to be consistent with preservation guidelines. The following conditions apply to this certificate of appropriateness:

1. All new wood will match the original. Wood will be painted upon completion. Note: when new, bare wood is left exposed to the exterior elements for a period of only a week or two, the life of the paint job subsequently applied to it will be decreased.
2. No dormers, chimneys, moldings parapets, or other permanent features will be altered or removed. No box vents, if used, will be visible from the street. If they are installed, they must be on a rear slope not visible from the street and they must be painted to blend with the color of the roofing material. A continuous ridge vent can be installed in place of box vents, but the vent must extend across the entire ridge and not stop short. Built-in rain gutters will be retained and sealed where needed. Valleys must be metal W-shape with no interweaving of shingles. Valleys and flashing must be painted or factory-finished to match the roofing color, unless copper. When installing new flashing at a masonry feature, the flashing must be stepped or cut into the mortar joints. The bricks may not be cut to install flashing at an angle.

We strongly recommend that the Wisconsin Historical Society's best practices for re-roofing be used to extend the life of your new roof. (Synthetic underlayment is an acceptable alternative to 30lb felt.) <https://www.wisconsinhistory.org/Records/Article/CS4260>

All work must be done in a craftsman-like manner, and must be completed within one year of the date this certificate was issued. Staff must approve any changes or additions to this certificate before work begins. Work that is not completed in accordance with this certificate may be subject to correction orders or citations. If you require technical assistance, please contact Historic Preservation staff as follows: Phone: (414) 286-5722 E-mail: hpc@milwaukee.gov.

If permits are required, you are responsible for obtaining them from the Milwaukee Development Center. If you have questions about permit requirements, please consult the Development Center's web site, www.milwaukee.gov/lms, or call (414) 286-8210.


A handwritten signature in black ink, appearing to read "Andrew C." followed by a stylized monogram or initials.

City of Milwaukee Historic Preservation


Copies to: Development Center, Ald. Bauman



Existing garage roof

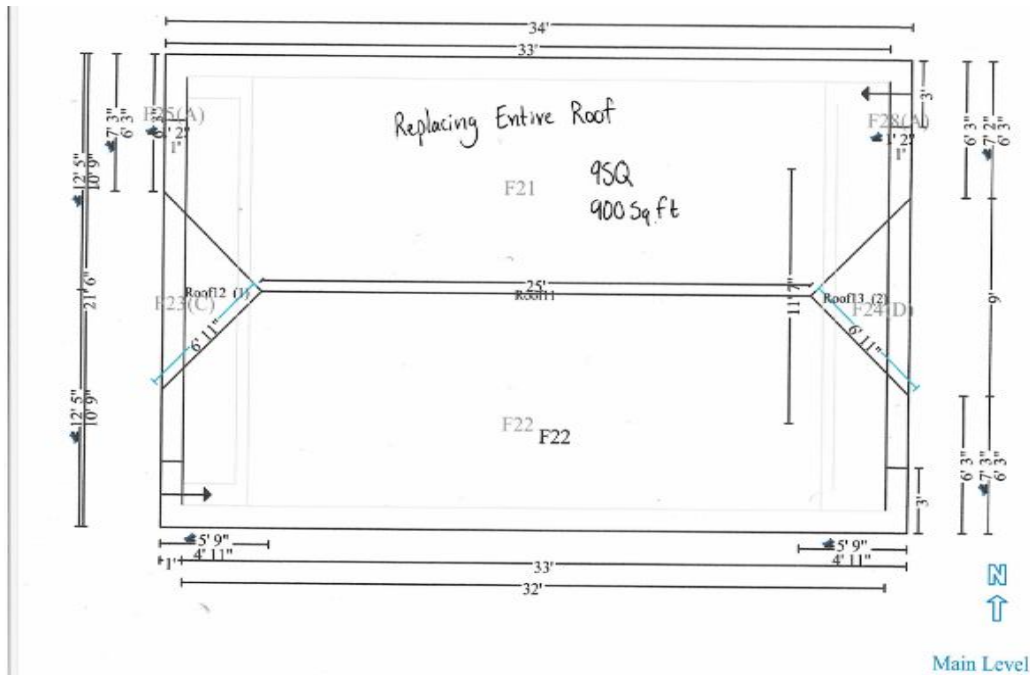

Replace garage roof and two sections of decking

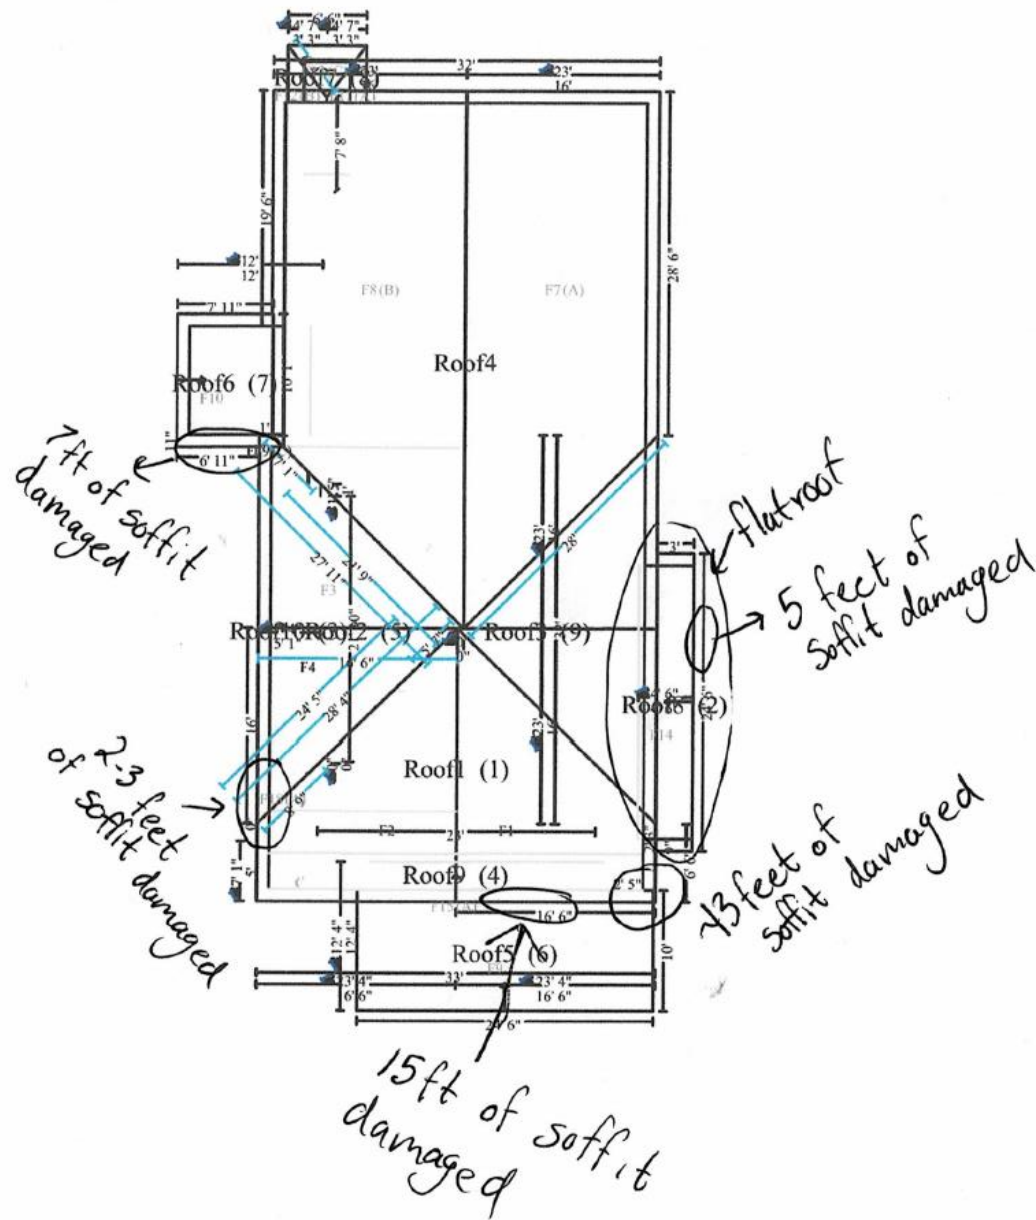


Main Level

4/28/2023

Page:

Scope of repair work on the house

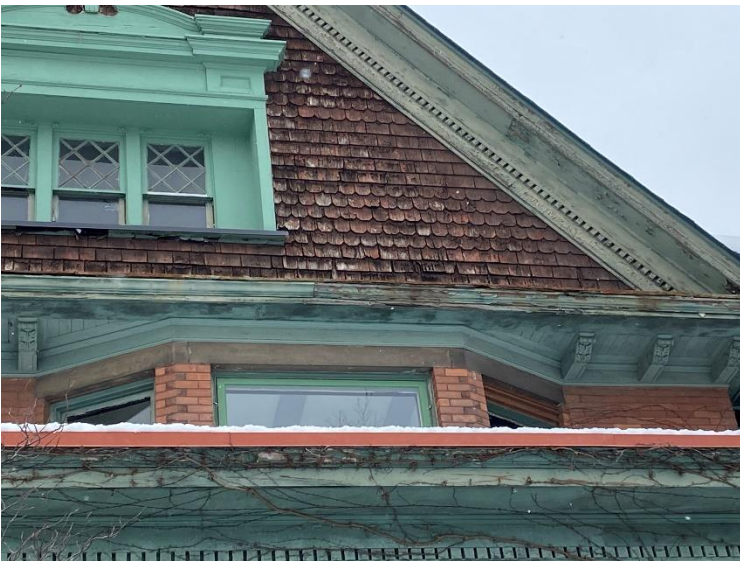

Existing damage to soffit