




Remove enclosure around rear door and build new wood stoop

Porch

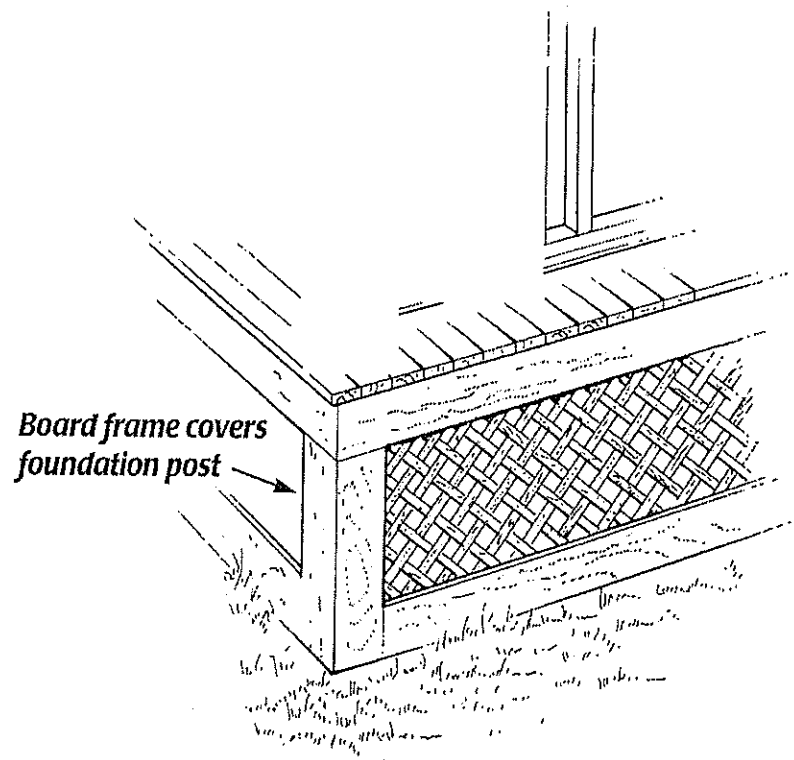

Rear porch stoop construction showing full frame skirting around base. Deck boards can be center-match or closely spaced deck boards. All wood must be painted upon completion. Treated wood left unpainted is not permitted.

Skirting, such as this lattice panel, enclosed the area beneath the porch floor. It should always be installed with a continuous board frame around it that is wide enough to cover the rough framing lumber that supports the porch deck.


Deck of stoop can be 1" center-match material or closely spaced deck boards to allow for drainage.

Steps made of two 2 x 6 for each tread

1 1/2"

As an option, skirting may be composed of 2-1/2" wide boards spaced 1" apart

STRINGERS MADE FROM 2 X 12 TREATED MATERIAL

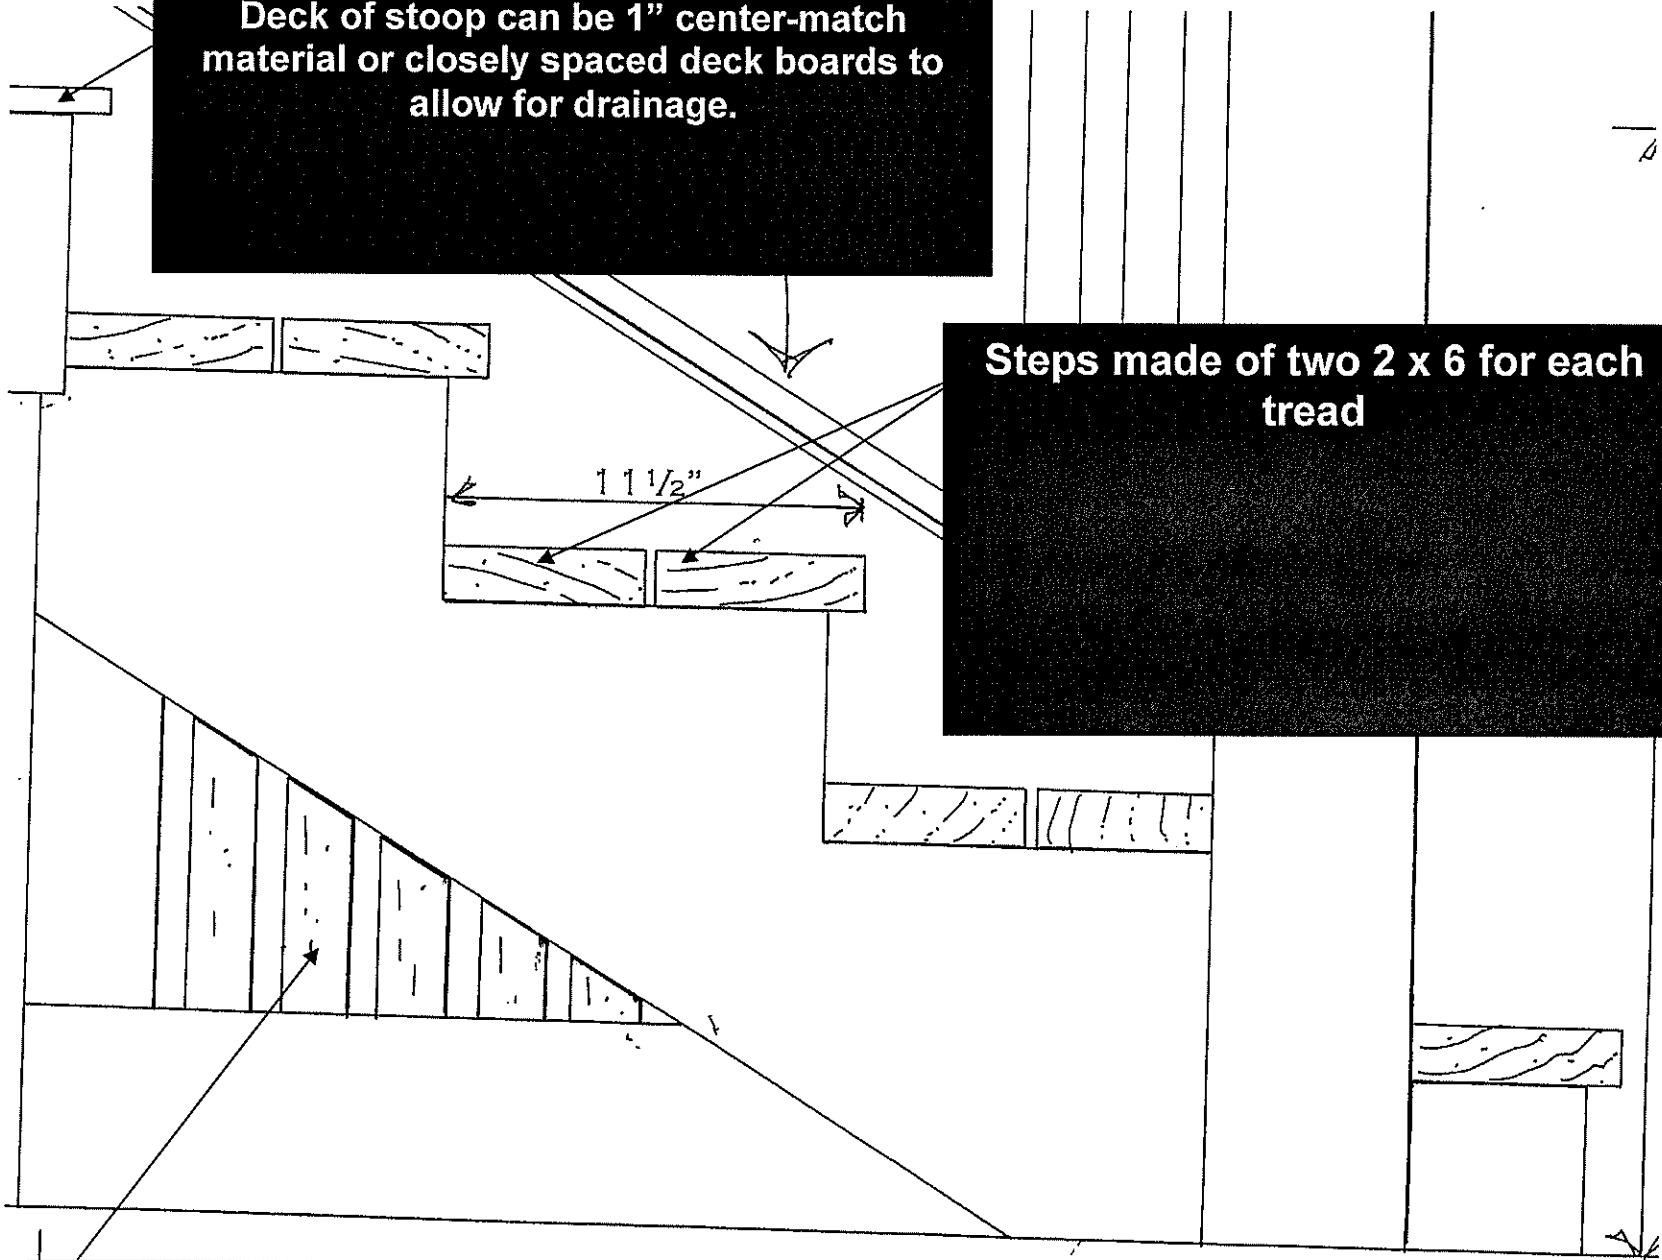

**Remove chimney and patch roof.
Install new GAF Timberline natural
Shadow shingles one of the
following: Bark Wood, Weathered
Wood or Hickory.**

