


GENERAL NOTES

- ALL INTERIOR DIMS. ARE FROM FACE-OF-STUD TO FACE-OF-STUD.
- ALL INTERIOR WALLS TO BE 3 5/8" OR 6" METAL STUDS @ 16" O.C. (SEE FLOOR PLAN FOR SIZE) W/ 5/8" GYPSUM BOARD BOTH SIDES - EXTEND TO BOTTOM CHORD OF TRUSSES.
- PROVIDE 3 1/2" SOUND BATT INSULATION AROUND INTERIOR WALLS.
- MISCELLANEOUS HARDWARE INCLUDED: HANDICAP HARDWARE, MEN'S AND WOMEN'S REST ROOM SIGNS.
- PROVIDE WOOD BLOCKING FOR ANY FURNISHINGS BY OWNER. (VERIFY LOCATIONS)
- ALL EXTERIOR WINDOWS TO HAVE GYPSUM BOARD RETURNS AT HEAD AND JAMBS AND PLASTIC LAMINATE COVERED WOOD SILL.
- ALL CABINETS AND COUNTERTOPS TO HAVE PLASTIC LAMINATE FRONTS AND TOPS.
- KITCHEN AND CABINET W/ COUNTERS BY GENERAL CONTRACTOR AS REQUIRED
- FOOD PREP AREA TO BE VERIFIED W/ OWNER. PROVIDE SHOP DRAWINGS ON EQUIPMENT.

SALES & SERVICE COUNTERS

IN RETAIL STORES WHERE COUNTERS HAVE CASH REGISTERS AND ARE PROVIDED FOR SALES OR DISTRIBUTION OF GOODS OR SERVICES TO THE PUBLIC, AT LEAST ONE OF EACH TYPE SHALL HAVE A PORTION OF THE COUNTER WHICH IS AT LEAST 36" IN LENGTH WITH A MAXIMUM HEIGHT OF 36" ABOVE THE FINISH FLOOR. COUNTER SHALL BE ON AN ACCESSIBLE ROUTE COMPLYING WITH A.D.A. GUIDELINE 4.3.

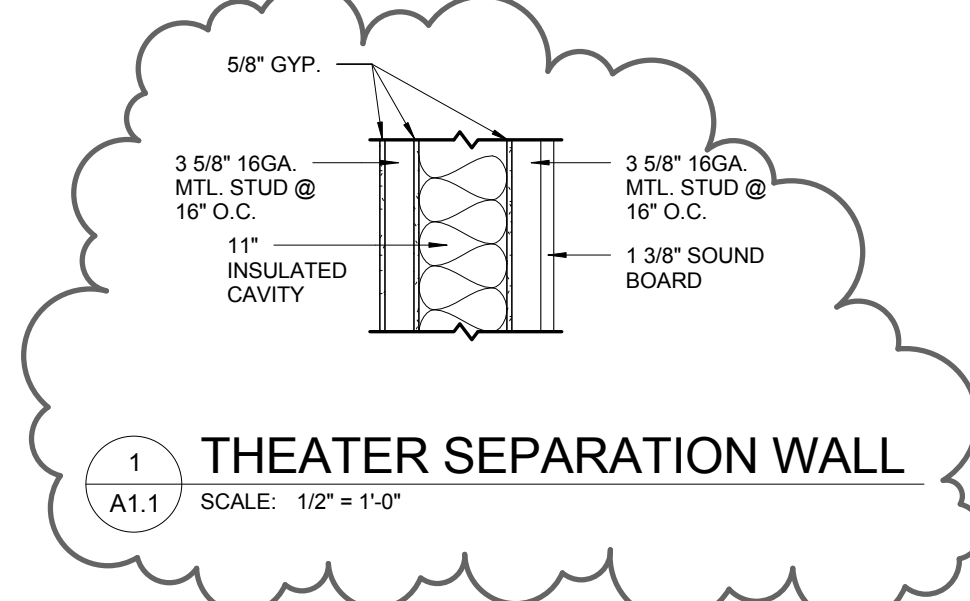

SYMBOLS LEGEND

	SEE SHEET AX.X FOR WALL TYPES
	EXIT SIGNAGE
	FIRE EXTINGUISHER - SEE AS SHEETS
	FIRE EXTINGUISHER W/ CABINET - SEE AS SHEETS
	EXISTING WALL TO REMAIN
	EXISTING WALL TO BE DEMOLISHED
	STUD WALL
	CONCRETE WALL
	MASONRY VENEER
	C.M.U. WALL
	(1) HOUR FIRE RATED
	(2) HOUR FIRE RATED
	(3) HOUR FIRE RATED
	(4) HOUR FIRE RATED
SEE PLAN FOR ALL WALL WIDTHS	
	EXISTING DOOR TO REMAIN
	EXISTING DOOR TO BE DEMOLISHED
	NEW DOOR

- FLOOR PLAN KEYED NOTES**
- INFILL EXISTING ARCHED OPENING WITH 3 5/8" METAL STUDS @ 16" O.C. WITH 5/8" GYP. BD. EA. SIDE. (HOLD WALL TO THEATER SIDE OF WALL)
 - PROVIDE A WOOD SHUTTER ON EXISTING ARCHED OPENING FOR CONCESSIONS. EXTEND PLASTIC LAMINATE COUNTER THRU ARCHED OPENING AND INTO LOBBY AREA
 - NEW PASS THRU BAR WITH ROLLING SHUTTER DOOR - BAR EQUIPMENT DRAWINGS
 - BAR EQUIPMENT AND LAYOUT BY BAR EQUIPMENT SUPPLIER - SEE EQUIPMENT DRAWINGS AND CUT SHEETS
 - CONCESSION EQUIPMENT AND COUNTER LAYOUT BY CONCESSION EQUIPMENT SUPPLIER - SEE EQUIPMENT DRAWINGS AND CUT SHEETS
 - KITCHEN EQUIPMENT AND LAYOUT BY KITCHEN EQUIPMENT SUPPLIER - SEE EQUIPMENT DRAWINGS AND CUT SHEETS
 - NEW SEATING BY THEATER EQUIPMENT SUPPLIER.
 - PATCH EXISTING CONCRETE FLOOR TO MATCH EXISTING FLOOR IN PROPOSED KITCHEN (5% SLOPE MAX.)
 - NEW CONCRETE FLOOR SLAB TO MATCH EXISTING FLOOR ELEVATION IN LOBBY AREA. SEE DETAIL 3 ON SHEET A4.0 FOR CONCRETE DETAILS
 - TICKET COUNTER - DESIGN AND LAYOUT BY OTHERS
 - SEE DETAIL ON THIS SHEET
 - 5/8" GYP. BD. ON 1 7/8" FURRING CHANNELS @ 16" O.C. ON EXISTING WALL
 - 12" WIDE (5) COURSE BOND BEAM REINF. W/ (2) #5'S - PROVIDE 8" BRG. EA. SIDE
 - 12" WIDE (2) COURSE BOND BEAM REINF. W/ (2) #5'S - PROVIDE 8" BRG. EA. SIDE (GROUT (3) COURSES BELOW BRG.)
 - PROVIDE LATEX GROUT TO LEVEL FLOOR IN WOMEN'S TOILET ROOM - CONTRACTOR TO PREP FLOOR AS REQUIRED BY MANUFACTURER
 - 5/8" GYP. BD. ON 3 5/8" METAL STUDS WITH 3 1/2" (R-11) BATT INSULATION AND 6 MIL POLY VAPOR BARRIER
 - SHADED AREA INDICATES AREA OF NEW CARPETING. OWNER TO SELECT COLOR.
 - SEE DETAIL ON THIS SHEET
 - 14" WIDE (2) COURSE BOND BEAM REINF. W/ (3) #5'S - PROVIDE 8" BRG. EA. SIDE (GROUT (3) COURSES BELOW BRG.)

PROPOSED FIRST FLOOR PLAN
SCALE: 1/8" = 1'-0"

