



CONSTRUCTION MANAGER



Harwood
Engineering
Consultants
255 North 21st Street | Milwaukee, WI 53233

PROJECT H242-17414

6270 N. HOPKINS ST.
MILWAUKEE, WI 53209


REVISIONS Δ		
NO.	DATE	DESCRIPTION




00% CD SET - BID S

DATE 3/1/2023

SHEET

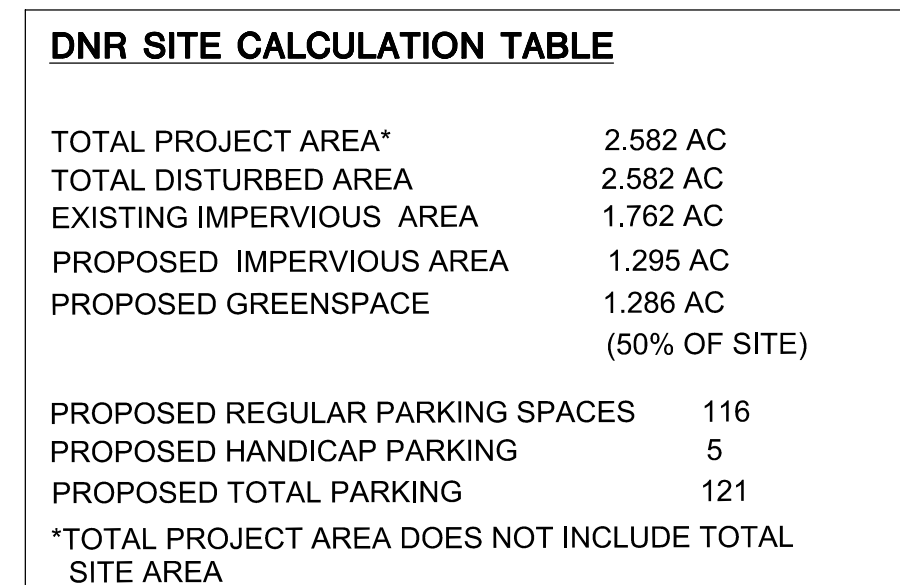

<u>MKE GARAGE SITE CALCULATION TABLE</u>	
TOTAL SITE AREA	6.880 AC
TOTAL DISTURBED AREA	5.887 AC
EXISTING IMPERVIOUS AREA	3.394 AC
PROPOSED IMPERVIOUS AREA	4.971 AC
PROPOSED GREENSPACE	1.908 AC
	(28% OF SITE)
PROPOSED REGULAR PARKING SPACES	5
PROPOSED HANDICAP PARKING	2
PROPOSED TOTAL PARKING	7

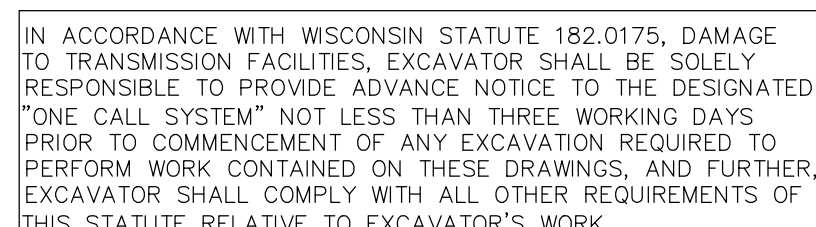

CONSTRUCTION MANAGER

255 North 21st Street | Milwaukee, WI 53233

PROJECT H242-17414

6270 N. HOPKINS ST.
MILWAUKEE, WI 53209

North

Copyright 2019 Barrientos Design

This drawing and/or content is not to be reproduced, changed, copied or assigned to a third party in any form or manner without first obtaining the expressed written consent of Barrientos Design. The user agrees to indemnify and hold the Architect harmless from any damages, liability, or cost, including attorney's fees and costs of defense resulting from any changes or modifications made by anyone other than the Architect. The Owner or owner's agent shall also hold harmless the Architect from any reuse of the drawings or data without the securing written consent of the Architect.

C-110

C-110



IN ACCORDANCE WITH WISCONSIN STATUTE 182.0175, DAMAGE TO TRANSMISSION FACILITIES, EXCAVATOR SHALL BE SOLELY RESPONSIBLE TO PROVIDE ADVANCE NOTICE TO THE DESIGNATED "ONE CALL SYSTEM" NOT LESS THAN THREE WORKING DAYS PRIOR TO COMMENCEMENT OF ANY EXCAVATION REQUIRED TO PERFORM WORK CONTAINED ON THESE DRAWINGS, AND FURTHER, EXCAVATOR SHALL COMPLY WITH ALL OTHER REQUIREMENTS OF THIS STATUTE RELATIVE TO EXCAVATOR'S WORK.

NOTES

1. SAWCUT EXISTING PAVEMENT (FULL DEPTH) AND CREATE BUTT JOINT WHERE PROPOSED MEETS EXISTING
2. DENOTES PROPOSED REVERSE STYLE CURB (TYP.)
3. CAUTION! UTILITIES, VERIFY EXACT LOCATION AND ELEVATION PRIOR TO STARTING CONSTRUCTION.
4. DENOTES PROPOSED 3' CURB TAPER.
5. DENOTES PROPOSED STOP SIGN AND PAINTED 12" WIDE STOP BAR.
6. DENOTES PROPOSED ADA PARKING. SEE DETAIL 12 ON SHEET C-510 FOR DETAILED INFORMATION.
7. DENOTES PROPOSED FENCE. SEE LANDSCAPE PLANS
8. DENOTES PROPOSED SITE LIGHTING. SEE ELECTRICAL PLANS
9. DENOTES PROPOSED MONUMENT SIGN (BY OTHERS).
10. DENOTES PROPOSED HAND HOLE. SEE ELECTRICAL PLANS
11. DENOTES PROPOSED PAVEMENT MARKING DIRECTION ARROWS

<u>MKE GARAGE SITE CALCULATION TABLE</u>	
TOTAL SITE AREA	6.880 AC
TOTAL DISTURBED AREA	5.389 AC
EXISTING IMPERVIOUS AREA	3.394 AC
PROPOSED IMPERVIOUS AREA	4.971 AC
PROPOSED GREENSPACE	1.908 AC
	(28% OF SITE)
PROPOSED REGULAR PARKING SPACES	5
PROPOSED HANDICAP PARKING	2
PROPOSED TOTAL PARKING	7