


**EAST ELEVATION** 

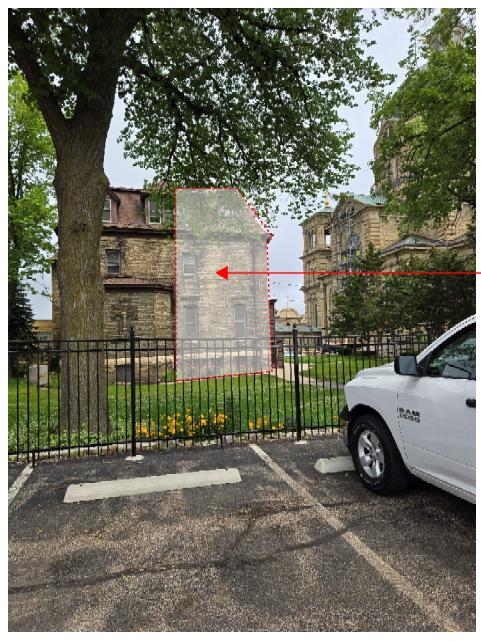

LOCATION OF PROPOSED ADDITION

**SOUTH ELEVATION** 

## PHOTOGRAPHS OF AFFECTED AREAS & ALL SIDES OF BUILDING



NORTHWEST ELEVATION



WEST ELEVATION

# **Existing Materials**

# Proposed Materials

Existing Roof:



IKO Cambridge Shigles / Aged Redwood






Exterior Masonry Brick / Stone:

Proposed Brick / Stone:

County Materials: Stone: Indiana Limestone Buff

Brick: Thin Venner Heritage Collection / Greystone



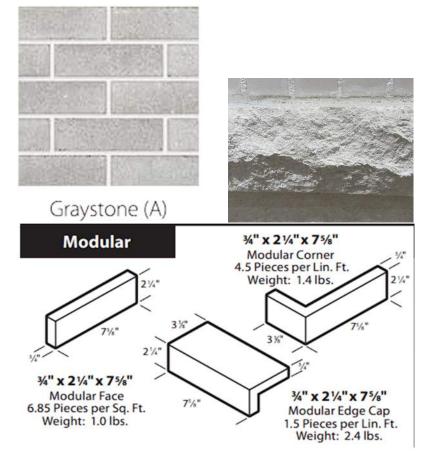


## **Existing Siding:**



## Proposed Siding:

James Hardie Artisan Shiplap Siding / Countrylane Red

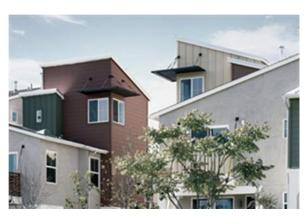





Countrylane Red JH90-20

# ST. JOSAPHAT PARISH CENTER

2322 S. 7th St., Milwaukee, WI 53215

# HPC SUBMITTAL

PRELIMINARY NOT FOR CONSTRUCTION

FIXTURES

URINALS

SHOWERS

WATER CLOSETS

ONTAGE CALCULATION INCREASES NOT USE

ROPOSED FIRE AREA WITHIN EXTERIOR/FIRE WALLS (fir levels X A)

PROPOSED FIRE AREA WITHIN EXTERIOR/FIRE WALLS (TIF IBVOIS X A)
ALLOWABLE BUILDING FIRE AREA Af (IBC 903):
PROPOSED FLOOR AREA WITHIN EXTERIOR/ FIRE WALLS (IBC 502.1):
ALLOWABLE FLOOR BUILDING AREA Ag (IBC 506):


PROPOSED HEIGHT WITHIN EXTERIOR/ FIRE WALLS (IBC 502.1) ALLOWABLE BUILDING HEIGHT (IBC 504):



#### PLAN REVIEW INFORMATION **BUILDING CODES** OCCUPANCY SEPARATIONS FIRE RESISTIVE RATINGS CIDENTAL USE AREA S (IBC 509) SEPARATION REQUIRED: (IF NOT SPRINKLERED) 2015 IECC - MODER CARL TONS FROM MYADBIN CODE 2015 IECC - MODS FROM W.A.C., SPS CHAP. 361 & 362 2015 IECC - MODS FROM W.A.C., SPS CHAP. 361 & 364 2015 IECC - MODS FROM W.A.C., SPS CHAP. 361 & 364 2015 IECC - MODS FROM W.A.C., SPS CHAP. 361 & 366 MI ADMIN CODE SPS CHAP. 361 TO 367 WI ADMIN CODE SPS CHAP. 361 TO 367 SPECIFIC MECHANICAL ROOMS (509) LAUNDRY ROOMS OVER 100 S.F. PARKING GARAGES ELEVATOR EQUIPMENT ROOMS MECHANICAL CODE: FUEL GAS CODE: EXISTING BUILDING CODE: ELECTRICAL CODE: PLUMBING CODE: NON-BEARING WALLS: INTERIOR: EXTERIOR ARE USING NON-SEPARARTED MIXED OCCUPANCIES (IBC 508.3) ARE USING SEPARATED MIXED OCCUPANCIES (IBC 508.4) 1-HOUR ROOM RATINGS: (PLACE ON PLANS FOR SPECIFIC CONSTRUCTION) 2015 1BC CHAP. 9 - IFC, W.A.C. SPS CHAP. 314 & 361 & NFPA FLOOR CONSTRUCTION (PER IBC REFERENCED STANDARDS CEILING: UL SYSTEMS L532: 7/8" CHANNELS @ 16" O.C. W/ (2) LAYERS 5/8" TYPE X DRYWALL TAPED & FINISHED ROOF CONSTRUCTION: FIRE WALLS (IBC 706): WALLS: UL SYSTEMS U301: 2X WOOD STUDS @ 16" O.C. W/ (2) LAYERS 5/8 TYPE X DRYWALL TAPED & FINISHED SITE CRITERIA RE BARRIERS (IBC 707): SHAFT ENCLOSES (IBC 707.3.1 & IBC 713.4): INTERIOR EXIT STARRWAY AND RAMP CONSTRUCTION (IBC 707.3.2 & IBC 1023.1): EXIT PASSAGEWAYS (IBC 707.3.4 & IBC 1024.3): HORIZONTAL EXITS (IBC 707.3.4 & IBC 1026.1.4 iBC 1026.2): **EXITING** CCUPANT LOAD (TABLE 1004): XIT WIDTH (IBC 1005): STAIRWAY WIDTH REQUIRED: STAIRWAY WIDTH PROVIDED: INCIDENTAL USES (IBC 707.3.7): FIRE AREAS (IBC 707.3.10 & IBC TABLE 707.3.10): -NO SECOND FLOOR - XX SHAFT AND VERTICAL ENCLOSURES (IBC 713): VICINITY MAP OTHER COMPONENT WIDTH REQUIRED OTHER COMPONENT WIDTH PROVIDED MECHANICAL SHAFTS (IBC 713.4); REFUSE AND LAUNDRY CHUTES (IBC 713.13); ELEVATOR SHAFTS (IBC 708.14); IUMBER OF EXITS REQUIRED (IBC 1006): NOMBER OF EXITS REQUIRED (BIG 1000); NUMBER OF EXITS PROVIDED BIG 1000; COMMON PATH OF ECRESS (BIG 1006.2.1); LESS EXIT ACCESS TRAVEL DISTANCE (BIG 1017.2); LESS MAX DEAD END CORRIDOR LENGTH (BIG 1020.4); MEANS OF ILLUMINATION (BIG 1018); MEANS OF ILLUMINATION (BIG 1018); LILUMINATED TO A LEVEL NOT LESS THAN 1 FOOT CANDLE (11 LUX) AT WALKING SURFACE FIRE PARTITIONS (IBC 708.3 & 402.4.2): TENANT SPACES (IBC 708.3 & 403.4.2): EXIT ACCESS (IBC 708.3 &1010.1): SEPARATION WALLS (IBC 708.1-1 & IBC 420.2 & IBC 708.3) CORRIDORS (IBC 708,1-3 & IBC 1007,1,1-1 ELECTRICAL CONTRACTOR RESPONSIBLE FOR CODE COMPLIANCE EXITING SIGNAGE INTERIOR FINISHES PROJECT COMPONENTS WALL & CEILING FINISH (IBC TABLE 803.11): VERTICAL EXITS & EXIT PASSAGE EXIT ACCESS CORRIDORS: ROOMS & ENCLOSED SPACES: **BUILDING CRITERIA** FIRE ESCAPE CANOPY BLEACHERS OCCUPANCY CLASSIFICATION (IBC 302) SPECIAL OCCUPANCY (IBC 401): RACKED SUPPORTED STORAGE BUILDING CONSTRUCTION CLASSIFICATION (IBC 602) LASS A: = FLAME SPREAD INDEX 0-25; SMOKE-DEVELOPED INDEX 0-450 ELEVATED PEDESTRIAN ACCESS MEMBRANE CONSTRUCTION CLASS B: = FLAME SPREAD INDEX 26-75; SMOKE-DEVELOPED INDEX 0-450. CLASS C: = FLAME SPREAD INDEX 76-200: SMOKE-DEVELOPED INDEX 0-450. 'URAL METAL BUILDING ROOF TRUSS OR LIGHT G.A. STEEL-NOT OPEN WEB STEEL JOISTS SANITARY FIXTURES ALLOWABLE BUILDING AREA CALCULATION (IBC 503, 504, 506): ALLOWABLE BUILDING AREA CALCULATION (IBC 503, 504, 506): A<sub>s</sub> = (A + (N S X + 1)) = (X + (X \* V)) A<sub>s</sub> = Allowable area (Square Feet) NS = Tabular area per floor = X S.F. I = Area increase for frontage per IBC 506.3.3 = (F/P - 0.25) · W / 30 P = Building Perimeter = X L.F. F = Building Trantage = X L.F. W = Width of public way or open green space = X L.F. FLOOR TRUSS (WOOD OR LIGHT GA. STEEL - NOT OPEN WEB JOISTS STEEL GIRDER

OTHER REQ'D FIXTURES X SERVICE SINKS REQ'D & CUPS AT ADA SINK IN CAFE

\*DRINKING WATER PROVIDED BY CUPS AT SINK OR WATER FOLINTAIN

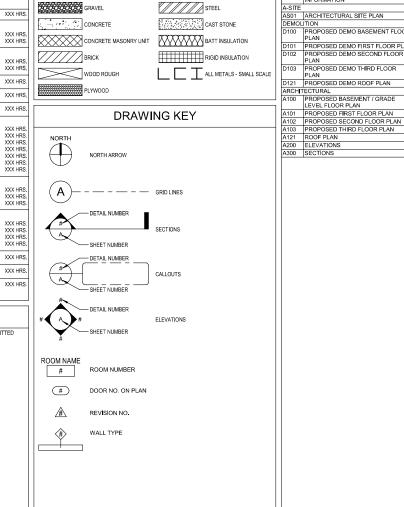

# OWNER MAILING ADDRESS OWNER MAILING ADDRESS SUPERVISING PROFESSIONAL PROFESSIONAL STAMP & DATE ROBERT R. STENSBERG, #12238-5

PLAN REVISIONS

٧	DESCRIPTION	SHEETS	DATE
	HPC SUBMITTAL	ALL SHEETS	08/14/2024



CENTER PARISH

JOSAPHAT ST.

DRAFTED BY: DESIGNER: ISSUF: 8/14/2024 10:50:53 AM SUBMITTAL DATE: XX-XX-X DESIGN NO. P-02420 CONSTRUCTION NO. ####

COVER SHEET & PLAN REVIEW INFORMATION

T101




PRELIMINARY NOT FOR CONSTRUCTION POSED (ELEVATOR ADDITION & REMODEL) FOR: ST. JOSAPHAT PARISH CENTER

DRAFTED BY: Author DESIGNER: RS ISSUE: 7/23/2024 6:48:08 PM DESIGN NO. P-02420


CONSTRUCTION NO. #### ARCHITECTURAL SITE PLAN

AS01

SOUTH 7TH STREET

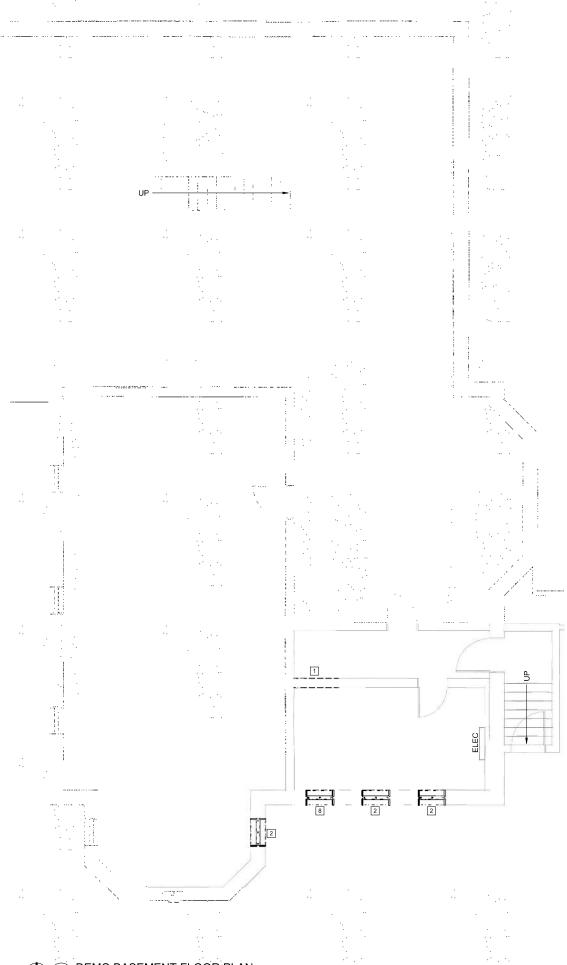



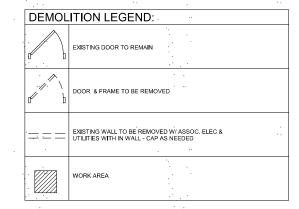

- EXISTING CONDITIONS MAY VARY FROM THOSE INDICATED, NOTIFY THE ARCHITECT IN WRITING OF DISCREPANCIES BETWEEN EXISTING CONDITIONS AND THE CONTRACT DOCUMENTS BEFORE PROCEEDING WITH THE WORK.
- CONFIRM WITH OWNER FOR ANY INTENT TO SALVAGE ANYTHING FROM DEMOLITION WORK.
- ANY DEMOLITION WORK SHALL BE DONE CAREFULLY. ALL DISTURBED SURFACES TO BE REPAIRED APPROPRIATELY. ALL SALVAGEABLE ITEMS SHALL BE TURNED OVER TO THE OWNER.
- PATCH OUT FLOORS AND WALLS AT REMOVED PARTITIONS TO MATCH EXISTING ADJACENT FINISHES WHERE NEW FINISHES ARE NOT SCHEDULED.

- 4. WHERE APPLICABLE, REMOVE ALL LOOSE PAINT ENCOUNTERED ON SURFACES RELATED TO THE WORK, AND DISPOSE PER CODE REQUIREMENTS.
- REMOVE EXISTING ABANDONED ELECTRICAL EQUIPMENT. GC TO COORDINATE
   WITH OWNER TO IDENTIFY FIXTURES AND EQUIPMENT FOR SALVAGE, RECYCLING,
   OR REMOVAL, GC SHALL PROVIDE CREDIT TO OWNER FOR ANY MATERIAL THAT
   CAN BE SALVAGED FOR REUSE/RECYCLING.

### GENERAL NOTES - DEMOLITION:

- REMOVE INTERIOR PARTITION WALLS, INTERIOR DOORS, ACOUSTIC CEILING . SYSTEMS, ACOUSTIC TILES, LIGHTING AND ELECTRICAL ACCESSORIES AS REQUIRED BY FINAL PLANS.
- DEMOLITION OF MECHANICAL, ELECTRICAL, AND PLUMBING ELEMENTS REQUIRED BY THE GENERAL DEMOLITION, BUT NOT INDICATED. SHALL BE COORDINATED BY THE GENERAL CONTRACTOR, EACH TRADE CONTRACTOR SHALL COORDINATE THEIR DEMOLITION WITH EACH OTHER AND WITH THE SCOPE OF THE FINISHED WORK.
- CONTRACTOR TO VERIFY STRUCTURAL INTEGRITY OF ALL ADJACENT FRAMING "PRIOR TO REMOVING WALLS, HEADERS, ETC. PROVIDE TEMPORARY SUPPORT AND/OR SHORING AS REQUIRED BETWEEN DEMOLITION AND NEW CONSTRUCTION WORK.
- CONTRACTOR SHALL PATCH FLOOR, FILL VOIDS AND DEPRESSIONS TO MAKE FLOOR LEVEL TO ACCEPT NEW FLOOR FINISHES PER MANUFACTURER'S RECOMMENDATIONS.
- PROVIDE TEMPORARY SUPPORT AND STABILIZE ANY PARTITIONS THAT BECOME UNBRACED DUE TO SELECTIVE OR PARTIAL DEMOLITION. NO DEMOLITION WORK SHALL NITERRUPT, COMPROMISE, DAMAGE, OR REMOVE ADJACENT STRUCTURE OR FINISHES NOT SPECIFIED FOR DEMOLITION.
- FILL AND/OR GRIND FLOORS AT REMOVED PARTITIONS AS REQUIRED TO PROVIDE A SMOOTH TRANSITION, SLOPE NOT TO EXCEED 1/16" PER FOOT.
- REMOVE ALL CARPETING, RUGS, TILE, SHEET FLOORING, AND OTHER FINISHES
   COMPLETELY TO EXISTING SUBFLOOR AS REQUIRED BY FINAL PLANS.
- REMOVE ALL ELECTRICAL FIXTURES, OUTLETS, SUPPLY BOXES, AND WIRES AS
   REQUIRED BY FINAL PLANS. TERMINATE LINES BELOW SUBFLOOR (MINIMUM) OR AT
   MAIN PANEL.
- 13. CONTRACTOR SHALL TERMINATE ALL ELECTRICAL, IT, PLUMBING, TELECOMDATA LINES AND PROVIDE FOR UNINTERRUPTED SERVICE TO THE FACILITY BEFORE COMMENCING DEMOLITION WORK.
- 15. RÉMOVE ALL EXISTING FLOORING FINISHES, PROTRUDING OBJECTS (BOLTS, ETC.), AND LOOSE PIECES OF CONCRETE. ALL UNEVEN SURFACES TO BE GROUND DOWN. REMEDIATE IDENTIFIED HAZARDOUS MATERIALS AS REQUIRED BY CODE AND APPLICABLE LAWS & REGULATIONS. STRIP CONCRETE FLOOR AND RESEAL PER FINAL PLANS.
- 16. REMOVE EXISTING CMU WALLS, FILL AND/OR GRIND FLOORS AT REMOVED PARTITIONS AS REQUIRED TO PROVIDE A SMOOTH TRANSITION.

### **DEMOLITION PLAN KEYNOTES**

REMOVE EXISTING WINDOWS (SEE PLAN A100 & A101 FOR INFILL NOTES) REMOVE EXISTING WINDOWS

REVISIONS

ANDERSON
ASHTON
DESIGN / BUILD
2746 South 1861h Street
New Beet, WIR 5151
Phone, (282) 786-4840
WWW.ANDERSONASHTON.COM


CENTER PARISH

JOSAPHAT


ST

DRAFTED BY: Author DESIGNER: ISSUE: 7/23/2024 6:48:33 PM DESIGN NO. P-02420 CONSTRUCTION NO. ####

PROPOSED DEMO
BASEMENT FLOOR PLAN

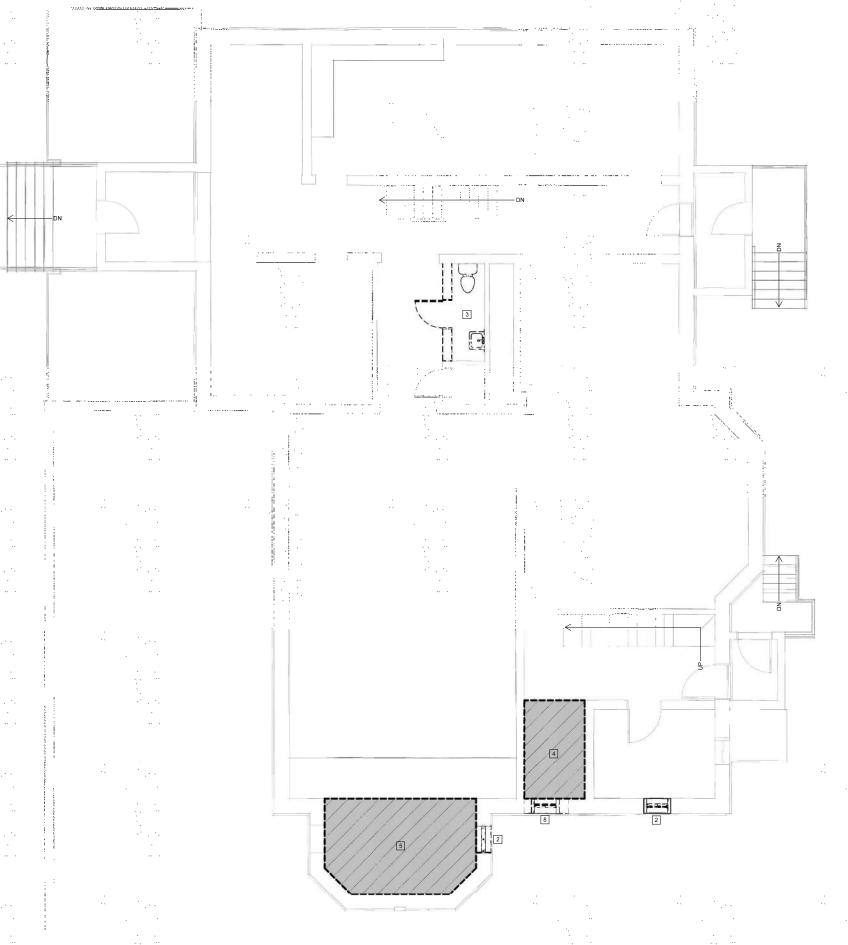

1 DEMO FIRST FLOOR PLAN

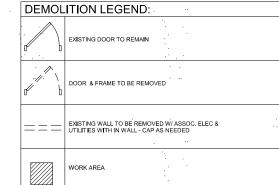

### GENERAL NOTES - DEMOLITION:

- EXISTING CONDITIONS MAY VARY FROM THOSE INDICATED, NOTIFY THE ARCHITECT IN WRITING OF DISCREPANCIES BETWEEN EXISTING CONDITIONS AND THE CONTRACT DOCUMENTS BEFORE PROCEEDING WITH THE WORK.
- REMOVE INTERIOR PARTITION WALLS, INTERIOR DOORS, ACOUSTIC CEILING SYSTEMS, ACOUSTIC TILES, LIGHTING AND ELECTRICAL ACCESSORIES AS REQUIRED BY FINAL PLANS.
- CONFIRM WITH OWNER FOR ANY INTENT TO SALVAGE ANYTHING FROM DEMOLITION WORK.
- DEMOLITION OF MECHANICAL, ELECTRICAL, AND PLUMBING ELEMENTS REQUIRED BY THE GENERAL DEMOLITION, BUT NOT INDICATED, SHALL BE COORDINATED BY THE GENERAL CONTRACTOR, EACH TRADE CONTRACTOR SHALL COORDINATE THEIR DEMOLITION WITH EACH OTHER AND WITH THE SCOPE OF THE FINISHED WORK.
- CONTRACTOR TO VERIFY STRUCTURAL INTEGRITY OF ALL ADJACENT FRAMING PRIOR TO REMOVING WALLS, HEADERS, ETC. PROVIDE TEMPORARY SUPPORT AND/OR SHORING AS REQUIRED BETWEEN DEMOLITION AND NEW CONSTRUCTION WORK.
- CONTRACTOR SHALL PATCH FLOOR, FILL VOIDS AND DEPRESSIONS TO MAKE FLOOR LEVEL TO ACCEPT NEW FLOOR FINISHES PER MANUFACTURER'S RECOMMENDATIONS.
- ANY DEMOLITION WORK SHALL BE DONE CAREFULLY. ALL DISTURBED SURFACES TO BE REPAIRED APPROPRIATELY. ALL SALVAGEABLE ITEMS SHALL BE TURNED OVER TO THE OWNER.
- PROVIDE TEMPORARY SUPPORT AND STABILIZE ANY PARTITIONS THAT BECOME UNBRACED DUE TO SELECTIVE OR PARTIAL DEMOLITION. NO DEMOLITION WORK SHALL NITERRUPT, COMPROMISE, DANAGE, OR REMOVE ADJACENT STRUCTURE OR FINISHES NOT SPECIFIED FOR DEMOLITION.
- PATCH OUT FLOORS AND WALLS AT REMOVED PARTITIONS TO MATCH EXISTING ADJACENT FINISHES WHERE NEW FINISHES ARE NOT SCHEDULED.
- REMOVE ALL CARPETING, RUGS, TILE, SHEET FLOORING, AND OTHER FINISHES
   COMPLETELY TO EXISTING SUBFLOOR AS REQUIRED BY FINAL PLANS.
- REMOVE ALL ELECTRICAL FIXTURES, OUTLETS, SUPPLY BOXES, AND WIRES AS REQUIRED BY FINAL PLANS. TERMINATE LINES BELOW SUBFLOOR (MINIMUM) OR AT MAIN PANEL.
- 13. CONTRACTOR SHALL TERMINATE ALL ELECTRICAL, IT, PLUMBING, TELECOMDATA LINES AND PROVIDE FOR UNINTERRUPTED SERVICE TO THE FACILITY BEFORE COMMENCING DEMOLITION WORK.
- 14. WHERE APPLICABLE, REMOVE ALL LOOSE PAINT ENCOUNTERED ON SURFACES RELATED TO THE WORK, AND DISPOSE PER CODE REQUIREMENTS.
- 15. REMOVE ALL EXISTING FLOORING FINISHES, PROTRUDING OBJECTS (BOLTS, ETC.), AND LOOSE PIECES OF CONCRETE, ALL UNEVEN SURFACES TO BE GROUND DOWN. REMEDIATE IDENTIFIED HAZARDOUS MATERIALS AS REQUIRED BY CODE AND APPLICABLE LAWS & REGULATIONS. STRIP CONCRETE FLOOR AND RESEAL PER FINAL PLANS.
- 16. REMOVE EXISTING CMU WALLS, FILL AND/OR GRIND FLOORS AT REMOVED PARTITIONS AS REQUIRED TO PROVIDE A SMOOTH TRANSITION.
- REMOVE EXISTING ABANDONED ELECTRICAL EQUIPMENT. GC TO COORDINATE
  WITH OWNER TO IDENTIFY FIXTURES AND EQUIPMENT FOR SALVAGE, RECYCLING,
  OR REMOVAL, GC SHALL PROVIDE CREDIT TO OWNER FOR ANY MATERIAL THAT
  CAN BE SALVAGED FOR REUSE/RECYCLING.

# **DEMOLITION PLAN KEYNOTES**

NO.	DESCRÍPTION				
2	REMOVE EXISTING WINDOWS (SEE PLAN A100 & A101 FOR INFILL NOTES)				
	REMOVE EXISTING PLUMBING FIXTURES, FLOORING, WALL & DOOR				
4	SHADED AREA INDICATES CEILING, WALL & FLOOR AREAS T O BE DEMOLISHED,				

SHADED AND/OR REPARED, PREPARE FOR NEW FINISHES PER A101
 SHADED AREA INDICATES CEILING AREA TO BE REPAIRED
 REMOVE EXISTING WINDOWS

REVISIONS




CENTER PARISH


JOSAPHAT ST

PRELIMINARY

DRAFTED BY: Author DESIGNER: ISSUF: 7/23/2024 6:48:52 PM DESIGN NO. P-02420

CONSTRUCTION NO. #### PROPOSED DEMO FIRST

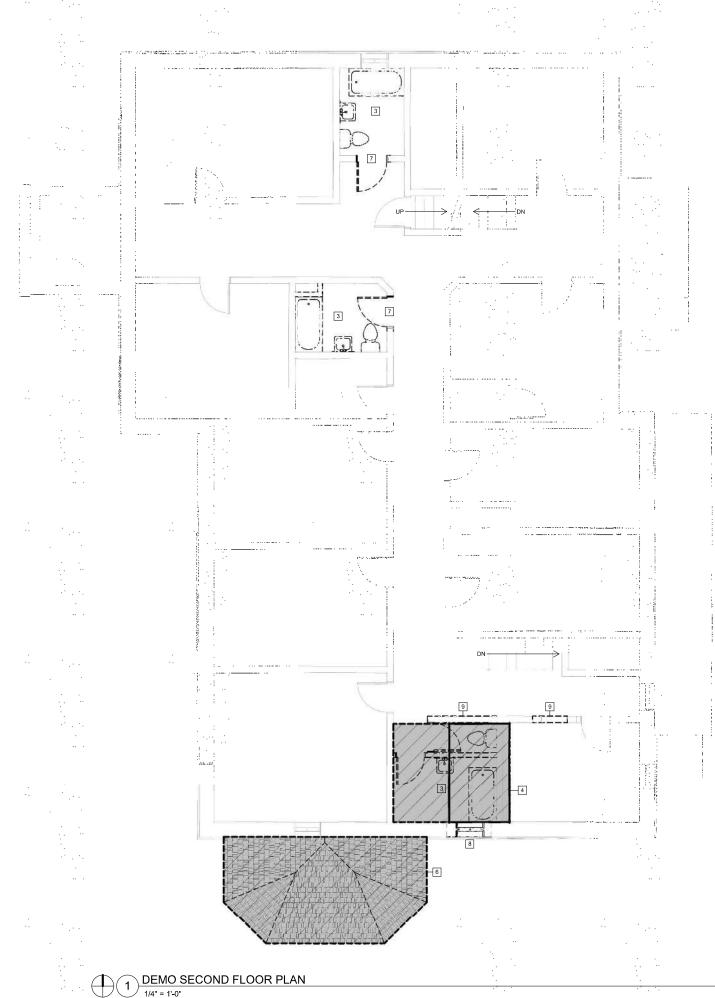

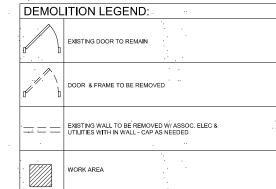

### GENERAL NOTES - DEMOLITION:

- EXISTING CONDITIONS MAY VARY FROM THOSE INDICATED. NOTIFY THE ARCHITECT IN WRITING OF DISCREPANCIES BETWEEN EXISTING CONDITIONS AND THE CONTRACT DOCUMENTS BEFORE PROCEEDING WITH THE WORK.
- REMOVE INTERIOR PARTITION WALLS, INTERIOR DOORS, ACOUSTIC CEILING
   SYSTEMS, ACOUSTIC TILES, LIGHTING AND ELECTRICAL ACCESSORIES AS REQUIRED BY FINAL PLANS.
- CONFIRM WITH OWNER FOR ANY INTENT TO SALVAGE ANYTHING FROM DEMOLITION WORK.
- 4. DEMOLITION OF MECHANICAL, ELECTRICAL, AND PLUMBING ELEMENTS REQUIRED BY THE GENERAL DEMOLITION, BUT NOT INDICATED, SHALL BE COORDINATED BY THE GENERAL CONTRACTOR, EACH TRADE CONTRACTOR SHALL COORDINATE THEIR DEMOLITION WITH EACH OTHER AND WITH THE SCOPE OF THE FINISHED WORK.
- 5. CONTRACTOR TO VERIFY STRUCTURAL INTEGRITY OF ALL ADJACENT FRAMING PRIOR TO REMOVING WALLS, HEADERS, ETC. PROVIDE TEMPORARY SUPPORT AND/OR SHORING AS REQUIRED BETWEEN DEMOLITION AND NEW CONSTRUCTION WORK.
- CONTRACTOR SHALL PATCH FLOOR, FILL VOIDS AND DEPRESSIONS TO MAKE FLOOR LEVEL TO ACCEPT NEW FLOOR FINISHES PER MANUFACTURER'S RECOMMENDATIONS.
- ANY DEMOLITION WORK SHALL BE DONE CAREFULLY. ALL DISTURBED SURFACES
  TO BE REPAIRED APPROPRIATELY. ALL SALVAGEABLE ITEMS SHALL BE TURNED
  OVER TO THE OWNER.
- PROVIDE TEMPORARY SUPPORT AND STABILIZE ANY PARTITIONS THAT BECOME
   UNBRACED DUE TO SELECTIVE OR PARTIAL DEMOLITION. NO DEMOLITION WORK
   SHALL INTERRUPT. COMPROMISE, DAMAGE, OR REMOVE ADJACENT STRUCTURE
   OR FINISHES NOT SPECIFIED FOR DEMOLITION.
- PATCH OUT FLOORS AND WALLS AT REMOVED PARTITIONS TO MATCH EXISTING ADJACENT FINISHES WHERE NEW FINISHES ARE NOT SCHEDULED.
- FILL AND/OR GRIND FLOORS AT REMOVED PARTITIONS AS REQUIRED TO PROVIDE A SMOOTH TRANSITION, SLOPE NOT TO EXCEED 1/16" PER FOOT.
- 11. REMOVE ALL CARPETING, RUGS, TILE, SHEET FLOORING, AND OTHER FINISHES COMPLETELY TO EXISTING SUBFLOOR AS REQUIRED BY FINAL PLANS.
- 12. REMOVE ALL ELECTRICAL FIXTURES, OUTLETS, SUPPLY BOXES, AND WIRES AS . REQUIRED BY FINAL PLANS. TERMINATE LINES BELOW SUBFLOOR (MINIMUM) OR AT MAIN PANEL.
- MAIN PANEL.

  13. CONTRACTOR SHALL TERMINATE ALL ELECTRICAL, IT, PLUMBING, TELECOM/DATA LINES AND PROVIDE FOR UNINTERRUPTED SERVICE TO THE FACILITY BEFORE COMMENCING DEMOLITION WORK.
- . 14. WHERE APPLICABLE, REMOVE ALL LOOSE PAINT ENCOUNTERED ON SURFACES RELATED TO THE WORK, AND DISPOSE PER CODE REQUIREMENTS.
- 15. RÉMOVE ALL EXISTING FLOORING FINISHES, PROTRUDING OBJECTS (BOLTS, ETC.), AND LOOSE PIECES OF CONCRETE, ALL UNEVEN SURFACES TO BE GROUND DOWN. REMEDIATE IDENTIFIED HAZARDOUS MATERIALS AS REQUIRED BY CODE AND APPLICABLE LAWS & REGULATIONS. STRIP CONCRETE FLOOR AND RESEAL PER FINAL PLANS.
- 16. REMOVE EXISTING CMU WALLS, FILL AND/OR GRIND FLOORS AT REMOVED PARTITIONS AS REQUIRED TO PROVIDE A SMOOTH TRANSITION.
- 17. REMOVE EXISTING ABANDONED ELECTRICAL EQUIPMENT. GC TO COORDINATE

  WITH OWNER TO IDENTIFY FIXTURES AND EQUIPMENT FOR SALVAGE, RECYCLING,
  OR REMOVAL, GC SHALL PROVIDE CREDIT TO OWNER FOR ANY MATERIAL THAT

  CAN BE SALVAGED FOR REUSE/RECYCLING.

## DEMOLITION PLAN KEYNOTES

NO.	DESCRÍPTION				
3 -	REMOVE EXISTING PLUMBING FIXTURES, FLOORING, WALL & DOOR				
4	SHADED AREA INDICATES CEILING, WALL & FLOOR AREAS T O BE DEMOLISHED, PATCHED AND/OR REPAIRED. PREPARE FOR NEW FINISHES PER A101				
6	EXISTING SHINGLES & UNDERLAYMENT TO BE REMOVED - SEE A102 FOR ROOF NOTES				
7	DOORWAYS TO BE WIDENED TO ACCOMODATE NEW 3' X 7' DOORS				
8	REMOVE EXISTING WINDOWS				

REVISIONS

OT A WORKING DRAWNER, ANDERSON, TOTA WORKING DRAWNERSON, CONSTRUCTION DETAILS. TOTOSY APPROVAL, ETC. MORMALLY OPPMENT AND/OR CONSTRUCTION MIRKINGED THAY A LOCAL ARCHITECT BE TOCCUMENTS BASED ON THESE TOCCUMENTS BASED ON THESE SEPONDIOSY SPECIFICATIONS.

IN ENGINEERING DECISION, RECULATORNEM ASSOCIATED WITH DESIGN DEVELOPMENT AS ASSOCIATED WITH DESIGN DEVELOPMENT AS ECOMMENDED TO ENGINEER TO ENGINEER TO ENGINEER THE SECONDED THAT GENERAL TO ENTRY THE RECOMMENDED THAT GENERAL TO ENTRY THE TO ENTRY THAT TO ENTRY THE TO ENTRY THAT THE TO ENTRY THE T



18 TEMOELIFOR

AT PARISH CENTER

r JOSAPHAT

PRELIMIN

OO LS

 DRAFTED BY:
 Author

 DESIGNER:
 RS


 ISSUE:
 7/23/2024 6:49:12 PM

 SUBMITTAL DATE:
 XXXXXXXX


 DESIGN NO.
 P-02420

 CONSTRUCTION NO.
 ####

PROPOSED DEMO SECOND FLOOR PLAN

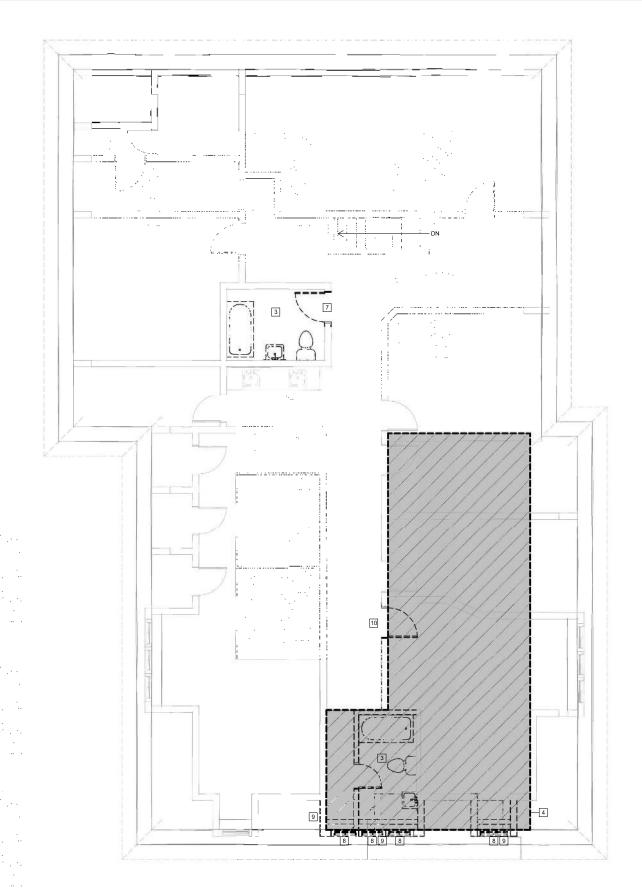



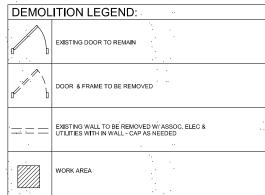

- DEMOLITION OF MECHANICAL, ELECTRICAL, AND PLUMBING ELEMENTS REQUIRED BY THE GENERAL DEMOLITION, BUT NOT INDICATED, SHALL BE COORDINATED BY THE GENERAL CONTRACTOR, EACH TRADE CONTRACTOR SHALL COORDINATE THEIR DEMOLITION WITH EACH OTHER AND WITH THE SCOPE OF THE FINISHED WORK.
- CONTRACTOR TO VERIFY STRUCTURAL INTEGRITY OF ALL ADJACENT FRAMING "PRIOR TO REMOVING WALLS, HEADERS, ETC. PROVIDE TEMPORARY SUPPORT AND/OR SHORING AS REQUIRED BETWEEN DEMOLITION AND NEW CONSTRUCTION WORK.
- ANY DEMOLITION WORK SHALL BE DONE CAREFULLY. ALL DISTURBED SURFACES TO BE REPAIRED APPROPRIATELY. ALL SALVAGEABLE ITEMS SHALL BE TURNED OVER TO THE OWNER.
- PATCH OUT FLOORS AND WALLS AT REMOVED PARTITIONS TO MATCH EXISTING ADJACENT FINISHES WHERE NEW FINISHES ARE NOT SCHEDULED.

- 13. CONTRACTOR SHALL TERMINATE ALL ELECTRICAL, IT, PLUMBING, TELECOMDATA LINES AND PROVIDE FOR UNINTERRUPTED SERVICE TO THE FACILITY BEFORE COMMENCING DEMOLITION WORK.

- REMOVE EXISTING ABANDONED ELECTRICAL EQUIPMENT. GC TO COORDINATE
   WITH OWNER TO IDENTIFY FIXTURES AND EQUIPMENT FOR SALVAGE, RECYCLING,
   OR REMOVAL, GC SHALL PROVIDE CREDIT TO OWNER FOR ANY MATERIAL THAT
   CAN BE SALVAGED FOR REUSE/RECYCLING.

### DEMOLITION PLAN KEYNOTES

NO.	DESCRÍPTION
3 -	REMOVE EXISTING PLUMBING FIXTURES, FLOORING, WALL & DOOR
	SHADED AREA INDICATES CEILING, WALL & FLOOR AREAS TO BE DEMOLISH PATCHED AND/OR REPAIRED, PREPARE FOR NÉW FINISHES PER A101
7	DOORWAYS TO BE WIDENED TO ACCOMODATE NEW 3' X 7' DOORS
8	REMOVE EXISTING WINDOWS

REVISIONS

GENERAL NOTES - DEMOLITION:

- EXISTING CONDITIONS MAY VARY FROM THOSE INDICATED, NOTIFY THE ARCHITECT IN WRITING OF DISCREPANCIES BETWEEN EXISTING CONDITIONS AND THE CONTRACT DOCUMENTS BEFORE PROCEEDING WITH THE WORK.
- REMOVE INTERIOR PARTITION WALLS, INTERIOR DOORS, ACOUSTIC CEILING . SYSTEMS, ACOUSTIC TILES, LIGHTING AND ELECTRICAL ACCESSORIES AS REQUIRED BY FINAL PLANS.
- CONFIRM WITH OWNER FOR ANY INTENT TO SALVAGE ANYTHING FROM DEMOLITION WORK.

- CONTRACTOR SHALL PATCH FLOOR, FILL VOIDS AND DEPRESSIONS TO MAKE FLOOR LEVEL TO ACCEPT NEW FLOOR FINISHES PER MANUFACTURER'S RECOMMENDATIONS.
- PROVIDE TEMPORARY SUPPORT AND STABILIZE ANY PARTITIONS THAT BECOME UNBRACED DUE TO SELECTIVE OR PARTIAL DEMOLITION. NO DEMOLITION WORK SHALL NITERRUPT, COMPROMISE, DAMAGE, OR REMOVE ADJACENT STRUCTURE OR FINISHES NOT SPECIFIED FOR DEMOLITION.
- FILL AND/OR GRIND FLOORS AT REMOVED PARTITIONS AS REQUIRED TO PROVIDE A SMOOTH TRANSITION, SLOPE NOT TO EXCEED 1/16" PER FOOT.
- 11. REMOVE ALL CARPETING, RUGS, TILE, SHEET FLOORING, AND OTHER FINISHES COMPLETELY TO EXISTING SUBFLOOR AS REQUIRED BY FINAL PLANS.
- 12. REMOVE ALL ELECTRICAL FIXTURES, OUTLETS, SUPPLY BOXES, AND WIRES AS REQUIRED BY FINAL PLANS. TERMINATE LINES BELOW SUBFLOOR (MINIMUM) OR AT MAIN PANEL.
- 4. WHERE APPLICABLE, REMOVE ALL LOOSE PAINT ENCOUNTERED ON SURFACES RELATED TO THE WORK, AND DISPOSE PER CODE REQUIREMENTS.
- 15. RÉMOVE ALL EXISTING FLOORING FINISHES, PROTRUDING OBJECTS (BOLTS, ETC.), AND LOOSE PIECES OF CONCRETE, ALL UNEVEN SURFACES TO BE GROUND DOWN, REMEDIATE IDENTIFIED HAZARDOUS MATERIALS AS REQUIRED BY CODE AND APPLICABLE LAWS & REGULATIONS. STRIP CONCRETE FLOOR AND RESEAL PER FINAL PLANS.
- 16. REMOVE EXISTING CMU WALLS, FILL AND/OR GRIND FLOORS AT REMOVED PARTITIONS AS REQUIRED TO PROVIDE A SMOOTH TRANSITION.

	DEMOCITION FLAM RETNOTES				
NO.	DESCRÍPTION				
3 -	REMOVE EXISTING PLUMBING FIXTURES, FLOORING, WALL & DOOR				
4	SHADED AREA INDICATES CEILING, WALL & FLOOR AREAS TO BE DEMOLISHED, PATCHED AND/OR REPAIRED. PREPARE FOR NEW FINISHES PER A101				
7	DOORWAYS TO BE WIDENED TO ACCOMODATE NEW 3' X 7' DOORS				
8	REMOVE EXISTING WINDOWS				
9	REMOVE EXISTING WALL				
10	REMOVE EXISTING DOOR				

CENTER PARISH


JOSAPHAT PRELIMINARY

ANDERSON ASHTON DESIGN / BUILD 2748 South 166th Street New Berlin (1851) Phone (282) 786-4840 WWW.ANDERSONASHTON.COM

ST

DRAFTED BY: Author DESIGNER: ISSUF: 7/23/2024 6:49:31 PM SUBMITTAL DATE: XX-XX-XX DESIGN NO. P-02420

CONSTRUCTION NO. #### PROPOSED DEMO THIRD FLOOR PLAN

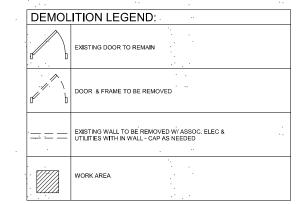

- EXISTING CONDITIONS MAY VARY FROM THOSE INDICATED, NOTIFY THE ARCHITECT IN WRITING OF DISCREPANCIES BETWEEN EXISTING CONDITIONS AND THE CONTRACT DOCUMENTS BEFORE PROCEEDING WITH THE WORK.
- CONFIRM WITH OWNER FOR ANY INTENT TO SALVAGE ANYTHING FROM DEMOLITION WORK.
- DEMOLITION OF MECHANICAL, ELECTRICAL, AND PLUMBING ELEMENTS REQUIRED BY THE GENERAL DEMOLITION, BUT NOT INDICATED. SHALL BE COORDINATED BY THE GENERAL CONTRACTOR, EACH TRADE CONTRACTOR SHALL COORDINATE THEIR DEMOLITION WITH EACH OTHER AND WITH THE SCOPE OF THE FINISHED WORK.
- CONTRACTOR TO VERIFY STRUCTURAL INTEGRITY OF ALL ADJACENT FRAMING "PRIOR TO REMOVING WALLS, HEADERS, ETC. PROVIDE TEMPORARY SUPPORT AND/OR SHORING AS REQUIRED BETWEEN DEMOLITION AND NEW CONSTRUCTION WORK.
- ANY DEMOLITION WORK SHALL BE DONE CAREFULLY. ALL DISTURBED SURFACES TO BE REPAIRED APPROPRIATELY. ALL SALVAGEABLE ITEMS SHALL BE TURNED OVER TO THE OWNER.
- PATCH OUT FLOORS AND WALLS AT REMOVED PARTITIONS TO MATCH EXISTING ADJACENT FINISHES WHERE NEW FINISHES ARE NOT SCHEDULED.
- FILL AND/OR GRIND FLOORS AT REMOVED PARTITIONS AS REQUIRED TO PROVIDE A SMOOTH TRANSITION, SLOPE NOT TO EXCEED 1/16" PER FOOT.
- 2. REMOVE ALL ELECTRICAL FIXTURES, OUTLETS, SUPPLY BOXES, AND WIRES AS REQUIRED BY FINAL PLANS, TERMINATE LINES BELOW SUBFLOOR (MINIMUM) OR AT MAIN PANEL.
- 4. WHERE APPLICABLE, REMOVE ALL LOOSE PAINT ENCOUNTERED ON SURFACES RELATED TO THE WORK, AND DISPOSE PER CODE REQUIREMENTS.
- REMOVE EXISTING ABANDONED ELECTRICAL EQUIPMENT. GC TO COORDINATE
   WITH OWNER TO IDENTIFY FIXTURES AND EQUIPMENT FOR SALVAGE, RECYCLING,
   OR REMOVAL, GC SHALL PROVIDE CREDIT TO OWNER FOR ANY MATERIAL THAT
   CAN BE SALVAGED FOR REUSE/RECYCLING.

## DEMOLITION PLAN KEYNOTES

NOTES
11 REMOVE EXISTING ROOF & DORMER WALLS

## GENERAL NOTES - DEMOLITION:

- REMOVE INTERIOR PARTITION WALLS, INTERIOR DOORS, ACOUSTIC CEILING . SYSTEMS, ACOUSTIC TILES, LIGHTING AND ELECTRICAL ACCESSORIES AS REQUIRED BY FINAL PLANS.

- CONTRACTOR SHALL PATCH FLOOR, FILL VOIDS AND DEPRESSIONS TO MAKE FLOOR LEVEL TO ACCEPT NEW FLOOR FINISHES PER MANUFACTURER'S RECOMMENDATIONS.
- PROVIDE TEMPORARY SUPPORT AND STABILIZE ANY PARTITIONS THAT BECOME UNBRACED DUE TO SELECTIVE OR PARTIAL DEMOLITION. NO DEMOLITION WORK SHALL NITERRUPT, COMPROMISE, DAMAGE, OR REMOVE ADJACENT STRUCTURE OR FINISHES NOT SPECIFIED FOR DEMOLITION.
- REMOVE ALL CARPETING, RUGS, TILE, SHEET FLOORING, AND OTHER FINISHES COMPLETELY TO EXISTING SUBFLOOR AS REQUIRED BY FINAL PLANS.
- 13. CONTRACTOR SHALL TERMINATE ALL ELECTRICAL, IT, PLUMBING, TELECOMDATA LINES AND PROVIDE FOR UNINTERRUPTED SERVICE TO THE FACILITY BEFORE COMMENCING DEMOLITION WORK.
- 15. RÉMOVE ALL EXISTING FLOORING FINISHES, PROTRUDING OBJECTS (BOLTS, ETC.), AND LOOSE PIECES OF CONCRETE, ALL UNEVEN SURFACES TO BE GROUND DOWN. REMEDIATE IDENTIFIED HAZARDOUS MATERIALS AS REQUIRED BY CODE 'AND APPLICABLE LAWS & REGULATIONS. STRIP CONCRETE FLOOR AND RESEAL PER FINAL PLANS.
- 16. REMOVE EXISTING CMU WALLS, FILL AND/OR GRIND FLOORS AT REMOVED PARTITIONS AS REQUIRED TO PROVIDE A SMOOTH TRANSITION.

 NO.
 DESCRIPTION

 6 - EXISTING SHINGLES & UNDERLAYMENT TO BE REMOVED - SEE A102 FOR ROOF

REVISIONS

ANDERSON
ASHTON
DESIGN / BUILD
2746 South 1861h Street
New Been, WIR 5151
Phone, (282) 786-4840
WWW.ANDERSONASHTON.COM



CENTER PARISH


PRELIMINARY
POSED (ELEVATOR ADDITION

JOSAPHAT

ST

DRAFTED BY: Author DESIGNER: ISSUE: 7/23/2024 6:50:12 PM . SUBMITTAL DATE: XX-XX-XX DESIGN NO. P-02420 CONSTRUCTION NO. ####

PROPOSED DEMO ROOF

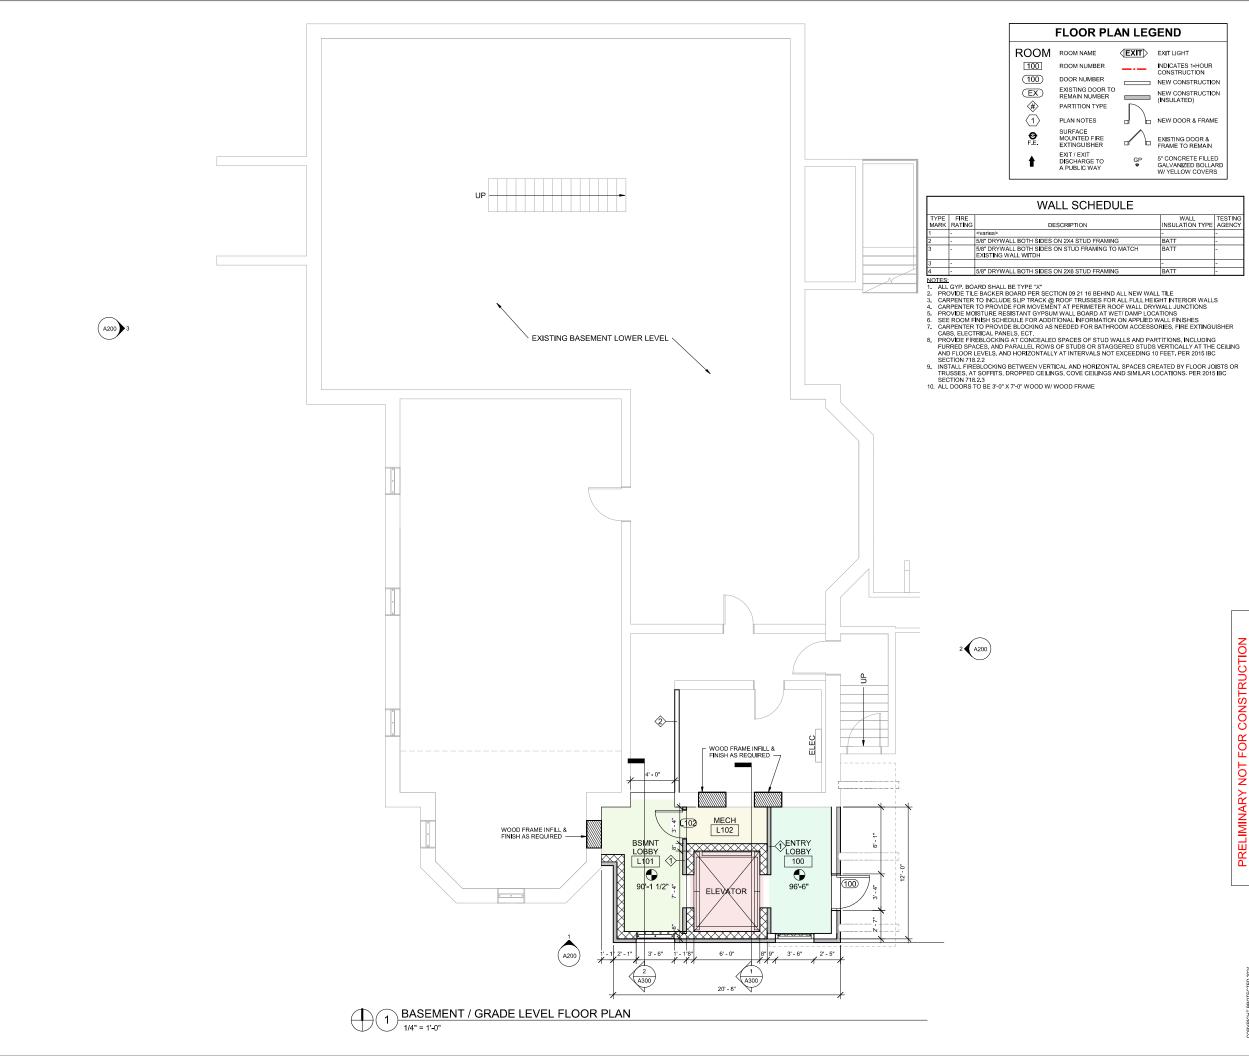


REVISIONS

PRELIMINARY NOT FOR CONSTRUCTION COSPIELEMATOR ADDITION & REMODEL/FOR: ST. JOSAPHAT PARISH CENTER

DRAFTED BY: AUTHOR DESIGNER: ISSUE: 7/23/2024 6:56:46 PM SUBMITTAL DATE: XX-XX-XX DESIGN NO. P-02420 CONSTRUCTION NO. ####

PROPOSED BASEMENT / GRADE LEVEL FLOOR PLAN

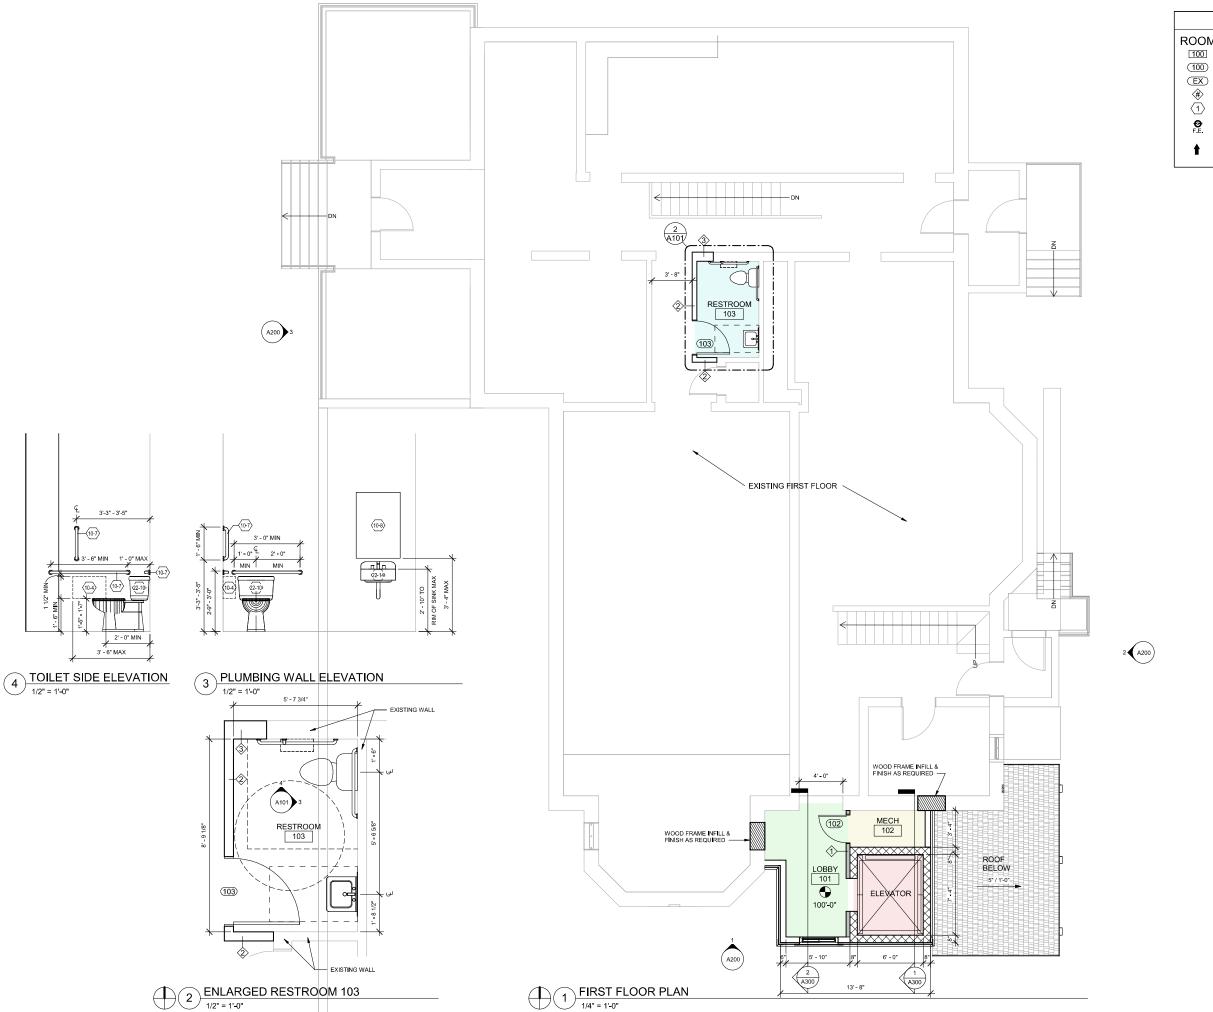

**FLOOR PLAN LEGEND** 

ROOM ROOM NAME 100 100

ROOM NUMBER DOOR NUMBER EXISTING DOOR TO REMAIN NUMBER PARTITION TYPE

PLAN NOTES SURFACE MOUNTED FIRE EXTINGUISHER EXIT / EXIT DISCHARGE TO A PUBLIC WAY

NEW CONSTRUCTION (INSULATED) NEW DOOR & FRAME

EXISTING DOOR & FRAME TO REMAIN

INDICATES 1-HOUR CONSTRUCTION

NEW CONSTRUCTION

5" CONCRETE FILLED GALVANIZED BOLLARE W/ YELLOW COVERS

REVISIONS




PRELIMINARY NOT FOR CONSTRUCTION POSED (ELEVATOR ADDITION & REMODEL) FOR:

ST. JOSAPHAT PARISH CENTER

DRAFTED BY: AUTHOR
DESIGNER: RS ISSUE: 7/23/2024 6:58:01 PM DESIGN NO. P-02420

CONSTRUCTION NO. #### PROPOSED FIRST FLOOR PLAN

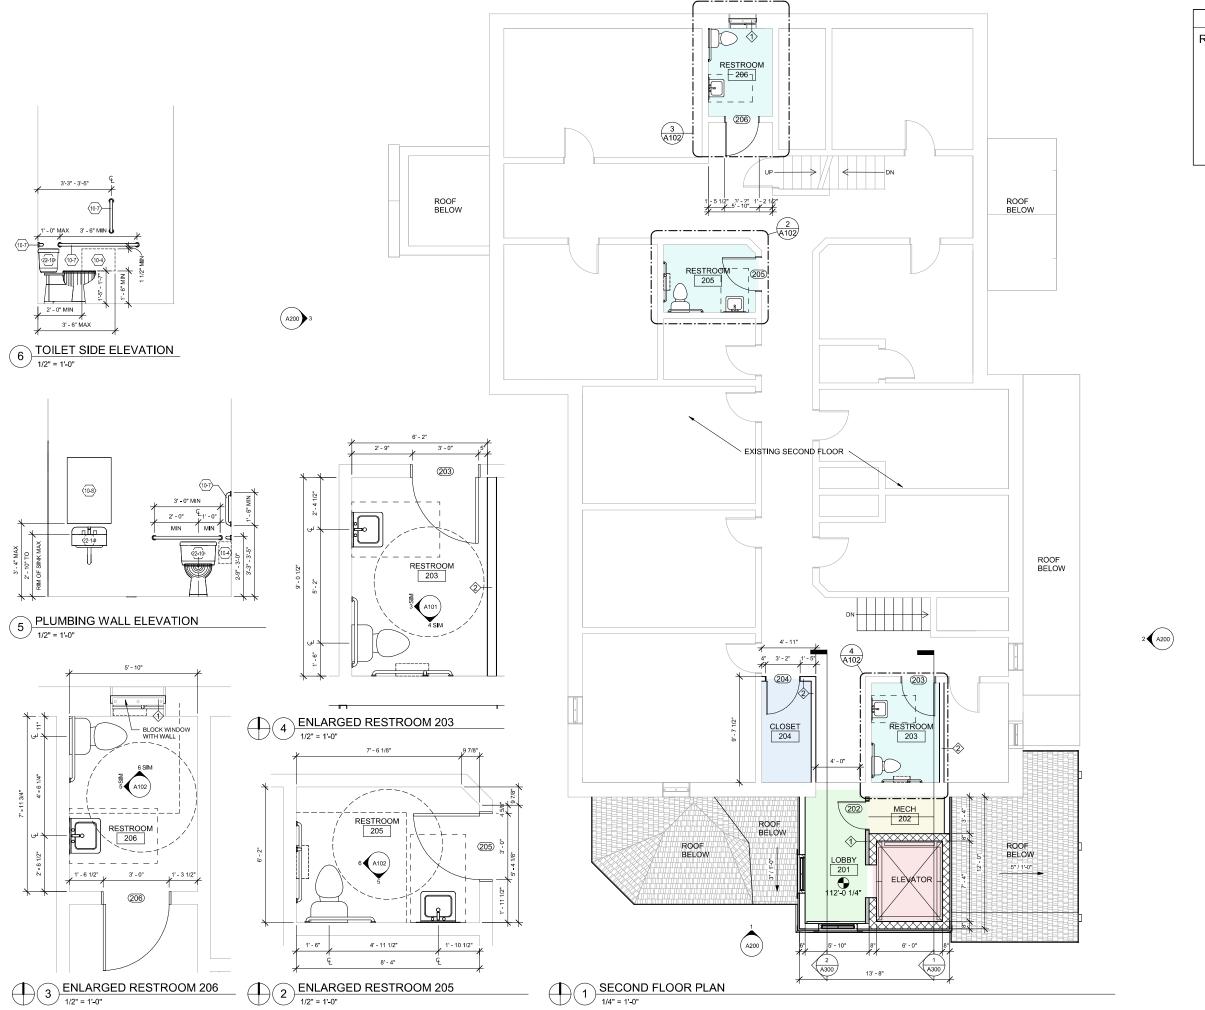

FLOOR PLAN LEGEND

ROOM ROOM NAME 100 100

ROOM NUMBER DOOR NUMBER EXISTING DOOR TO REMAIN NUMBER EX

₩ PARTITION TYPE 1 PLAN NOTES SURFACE MOUNTED FIRE EXTINGUISHER **⊕** F.E. EXIT / EXIT DISCHARGE TO A PUBLIC WAY

NEW CONSTRUCTION (INSULATED) NEW DOOR & FRAME

EXISTING DOOR & FRAME TO REMAIN

INDICATES 1-HOUR CONSTRUCTION

NEW CONSTRUCTION

5" CONCRETE FILLED GALVANIZED BOLLARE W/ YELLOW COVERS


REVISIONS



PRELIMINARY NOT FOR CONSTRUCTION COSPICED (ELEVATOR ADDITION & REMODEL) FOR: ST. JOSAPHAT PARISH CENTER

DRAFTED BY: AUTHOR DESIGNER: ISSUE: 7/23/2024 6:59:05 PM SUBMITTAL DATE: XX-XX-XX DESIGN NO. P-02420 CONSTRUCTION NO. ####

PROPOSED SECOND FLOOR PLAN

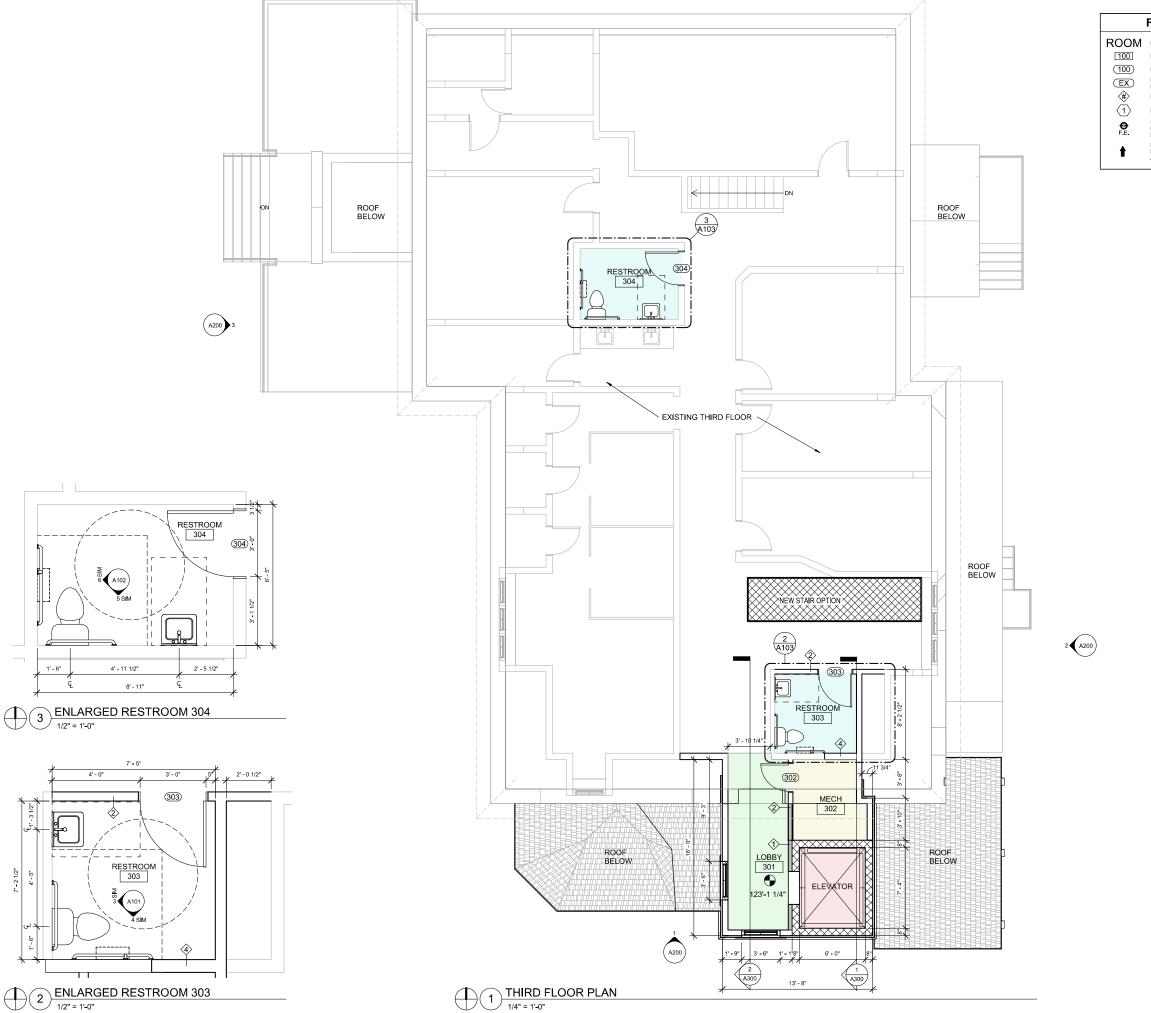

**FLOOR PLAN LEGEND** 

ROOM ROOM NAME

ROOM NUMBER DOOR NUMBER EXISTING DOOR TO REMAIN NUMBER PARTITION TYPE

PLAN NOTES SURFACE MOUNTED FIRE EXTINGUISHER EXIT / EXIT DISCHARGE TO A PUBLIC WAY

NEW CONSTRUCTION (INSULATED) NEW DOOR & FRAME

EXISTING DOOR & FRAME TO REMAIN

INDICATES 1-HOUR CONSTRUCTION

NEW CONSTRUCTION

5" CONCRETE FILLED GALVANIZED BOLLARE W/ YELLOW COVERS


REVISIONS



PRELIMINARY NOT FOR CONSTRUCTION POSED (ELEVATOR ADDITION & REMODEL) FOR: ST. JOSAPHAT PARISH CENTER

DRAFTED BY: AUTHOR DESIGNER: RS ISSUE: 7/23/2024 7:00:17 PM SUBMITTAL DATE: XX-XX-XX DESIGN NO. P-02420 CONSTRUCTION NO. ####

PROPOSED THIRD FLOOR PLAN

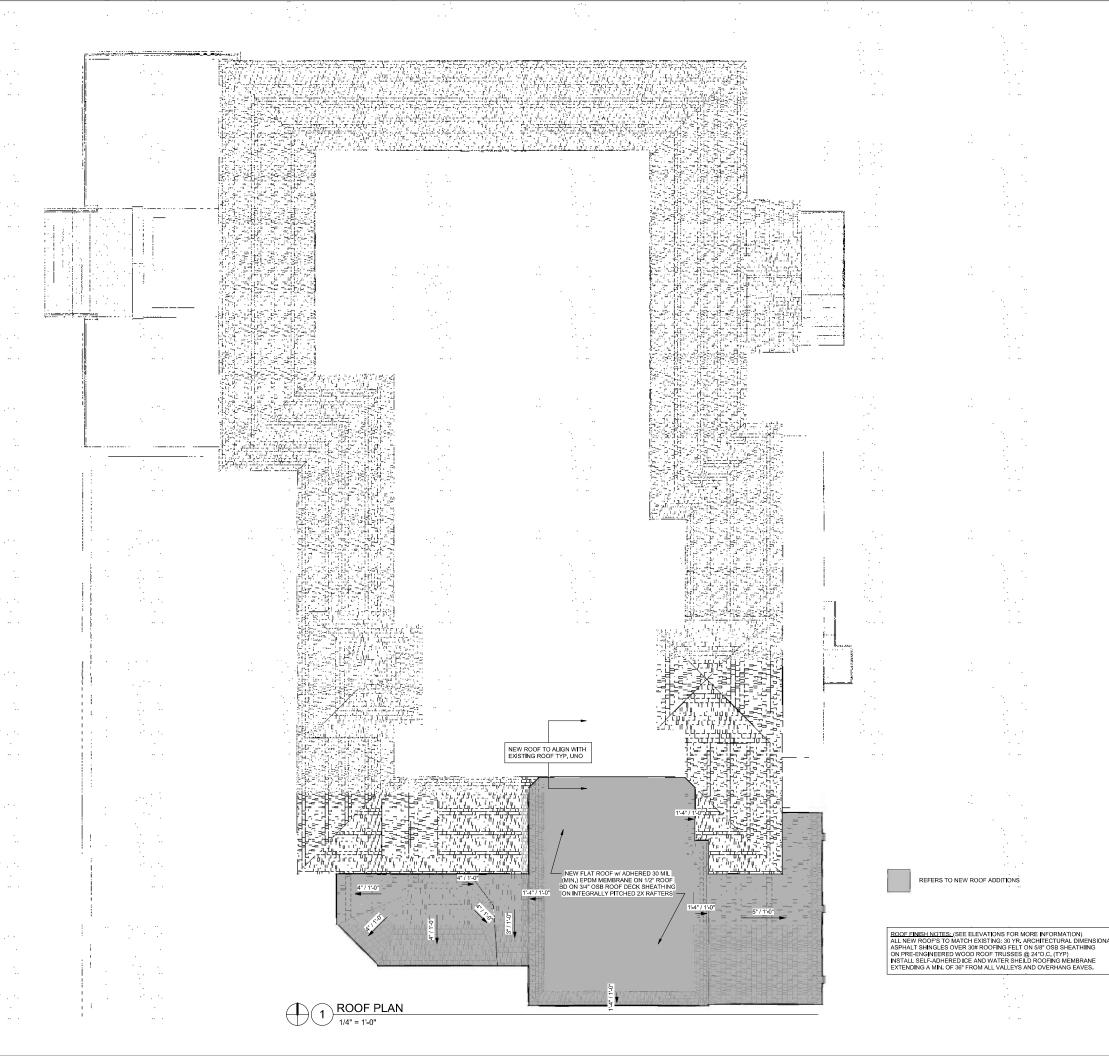

REVISIONS

ST. JOSAPHAT PARISH CENTER


REFERS TO NEW ROOF ADDITIONS

DRAFTED BY: Author DESIGNER: RS ISSUE: 7/23/2024 7:07:22 PM SUBMITTAL DATE: XX-XX-XX DESIGN NO. P-02420 CONSTRUCTION NO. ####

ROOF PLAN



EAST ELEVATION

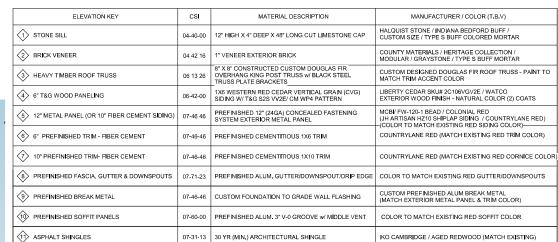

REVISIONS




CENTER ST. JOSAPHAT PARISH

DRAFTED BY: Author DESIGNER: SSUE: 8/14/2024 9:57:37 AM DESIGN NO. P-02420 ONSTRUCTION NO. ####

ELEVATIONS



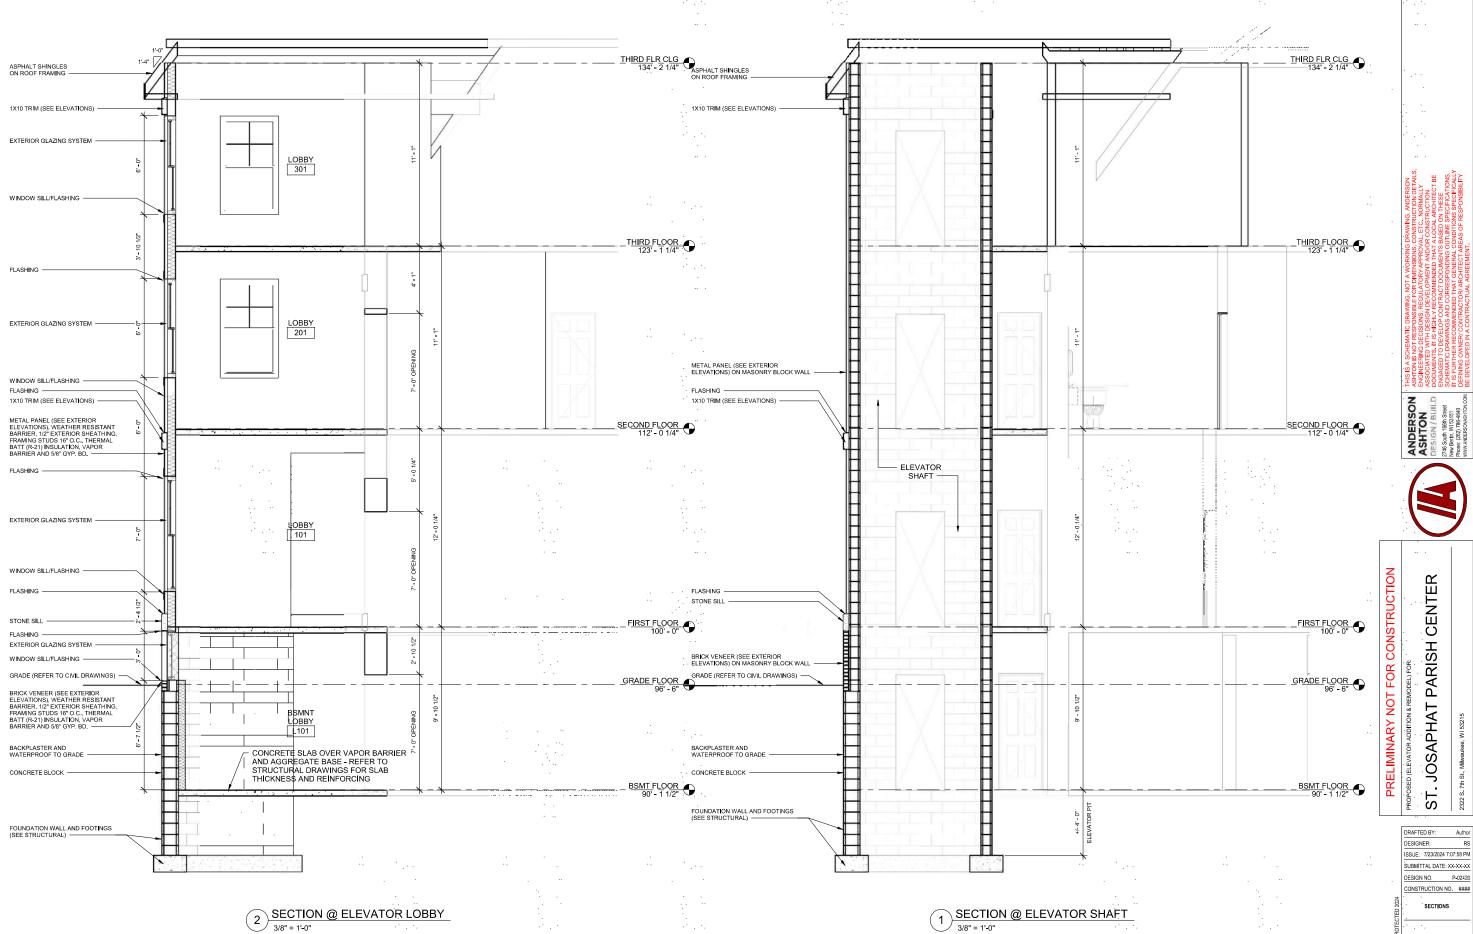

1 SECTION @ ELEVATOR SHAFT

A300

REVISIONS





SOUTH WEST 3D VIEW

PRELIMINARY NOT FOR CONSTRUCTION FORE CELEVATOR ADDITION & REMODEL) FOR: ST. JOSAPHAT PARISH CENTER

DRAFTED BY: Author DESIGNER: RS