Exhibit A File No. #191954 Minor Modification to a Detailed Planned Development known as Concordia Trust Property – Phase II for the Forest County Potawatomi Community of Wisconsin 3234 West State Street Minor Modification May 12th, 2020

Previous File History and Project Summary

In 2010, a General Planned Development (GPD) was established for the Concordia Trust Campus as file number 100290. The subject site was rezoned to a Detailed Planned Development (DPD; file number 110446) in 2011 to allow for construction of the data center on the eastern portion of the site. The DPD was modified in 2012 as file number 111611 to allow changes to the building footprint, elevations and parking layout. A minor modification is being requested to allow the western portion of the data center site to be utilized as a solar array on a temporary basis until such time that additional development occurs on the site.

Minor Modification Summary

Forest County Potawatomi Community continues to extend company-wide efforts in reducing their carbon footprint. In pursuit of its long-term energy goal to reduce its carbon footprint to zero, the Forest County Potawatomi Community has assumed a leadership role in creating a sustainable and healthy world. Since adopting its environmental mission statement in November 2008, the Community has made significant strides toward implementing several types of renewable energy to power its tribal facilities.

Continuing the goal and vision to be fully sustainable, FCPC has been awarded more funding and is a grant recipient for the Wisconsin Public Service Commission's Energy Innovation grant. This will allow them to install a 103 Kilowatt solar photovoltaic system and a 300 Kilowatt hour battery storage at the FCPC Data Center on the Wgema Campus. The existing ornamental fence will be extended to secure the solar arrays installed. The fence is 8 feet in height and will be set back 8 feet 10 inches from the property line and 9 foot 10 inches from sidewalk. The solar array consists of 4 rows total. Three rows of 12' wide x 75' long and fourth row 12'wide x 50' long. The battery storage, inverters, site controller, panelboard, will be installed inside the electrical yard behind 9 foot decorative brick and 8 foot ornamental fence.

List of Attachments

Set of Current Construction Plans attached.

Proposed Changes

Extension of ornamental fence and 103 Kilowatt Solar array installed on property west of Data Center electrical yard.

All other aspects of the DPD zoning will remain unchanged.

	PV SYSTEM DETAILS
ROOF TYPE:	GROUND MOUNT
DC SYSTEM SIZE:	69.60 KW DC
DC SYSTEM VOLTAGE:	1000 V
AC SYSTEM SIZE:	60 KW AC
MODULES	(174) HANWHA Q. PEAK DUO L-G5.3 400W
INVERTERS:	(1) SOLECTRIA XGI 1000 60/60
OPTIMIZERS:	N/A
RACKING:	UNIRAC
CLAMPS:	N/A
AZIMUTH:	180 DEG
ROOF PITCH:	30 DEG GROUND MOUNTED PV

SCOPE OF WORK


- CONTRACTOR SHALL ACCEPT, VERIFY AND INSTALL ALL MATERIAL AS LISTED ABOVE AND ON THE B.O.M. ANY DISCREPANCIES SHALL BE BROUGHT TO THE ATTENTION OF THE DEVELOPER IMMEDIATELY.
- ALL EQUIPMENT AND MATERIAL SHALL BE INSTALLED AS PER MANUFACTURES GUIDELINES SET FORTH IN INSTRUCTION MANUAL AND AS PER NEC. 110.(D)
- CONTRACTOR SHALL PROVIDE PROTECTIVE MATERIALS TO PREVENT DAMAGE TO EXISTING BUILDINGS OR EQUIPMENT AND PROPOSED BUILDINGS OR EQUIPMENT.
- CONTRACTOR SHALL PERFORM A PRE-CONSTRUCTION SITE WALK AT LEAST 5 DAYS PRIOR TO MOBILIZATION TO CONFIRM SITE CONDITIONS, STAGING AREAS AND ANY OTHER SITE SPECIFIC DETAILS REQUIRED. ANY ISSUES SHALL BE PHOTO DOCUMENTED ALONG WITH A WRITTEN REPORT AND PROVIDED IMMEDIATELY TO THE NECESSARY PARTIES.
- IF DEVELOPER IS NOT CALLED, CONTRACTOR SHALL BE RESPONSIBLE FOR ANY AND ALL TESTING/INSPECTION REQUIRED TO APPROVE SITE AT ENGINEERS DISCRETION.
- PRIOR TO FINAL SIGN-OFF THE CONTRACTOR SHALL PROVIDE A LETTER OF COMPLIANCE FOR THE WORK DONE. THE LETTER MUST REFERENCE THAT THE WORK WAS DONE IN ACCORDANCE TO THE DRAWINGS AND IN COMPLIANCE WITH THE BUILDING CODE OF THE AUTHORITY HAVING JURISDICTION.

SITE INFORMATION

PROPERTY OWNER: FCPC DATA HOLDINGS

SITE I.D.#:					
LOT:	N/A				
BIN:	N/A				
ZONE DISTRICT:	N/A				
HISTORICAL:	N/A				
POWER COMPANY: WE ENERGIE	S				
PROJECT MANAGER: KYLE HE	YWOOD	PHONE:	(262)	547-1200)

FCPC DATA HOLDINGS 3135 W HIGHLAND BLVD MILWAUKEE, WI 53208

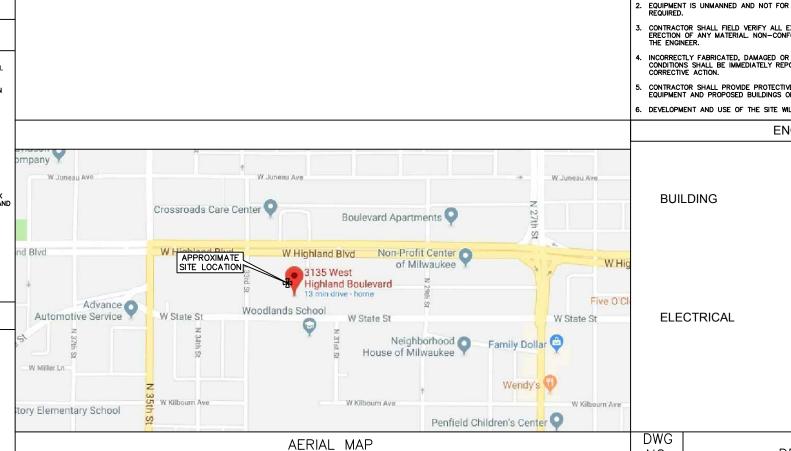

D NO: TITLE SHEET T-1.00 ARRAY LAYOUT PV-1.00 E-1.00 ONE-LINE DIAGRAM E-1.01 GROUNDING ONE-LINE E-2.00 COMMUNICATION DIAGRAM D-1.00 APPROXIMATE EQUIPMENT PAD PLAN VIEW SITE LOCATION D-2.00 EQUIPMENT PAD SIDE VIEW D-3.00 FOUNDATION EMBEDMENT SPEC SHEETS E-3.00 E-3.01 SPEC SHEETS E-4.00 NEC LABELS GN-1 GENERAL NOTES IT IS A VIOLATION OF THE LAW FOR DIRECTION OF A LICENSED PROFESS EXPLICITLY AGREED TO BY THE ENGI LIABILITY ASSOCIATED WITH THE REU: HEREIN. DO NO

LOCATION MAP

INSP CONTRACTOR SHALL STRICTLY ADHERE TO TH WITHIN THE DRAWING; NEC. 2017, IBC. 2015,

CONTRACTOR SHALL BE KNOWLEDGEABLE OF

PROGRESS INSPECTIONS: ROUGH ELECTRIC:


ROUGH BUILDING FINAL INSPECTIONS;

ELECTRIC:


BUILDING:

OTHER:

	INSPECTION ITEMS		NIL	
ntractor s Thin the Dr	SHALL STRICTLY ADHERE TO THE FOLLOWING CODE STANDARDS UNCLES OTHERWISE NOTED AWING; NEC. 2017, IBC. 2015, IFC. 2015 AND APPLICABLE LOCAL CODES.		~ 5	SOLAR INC
OGRESS INS	PECTIONS:		Kawatapin	
ugh electr Ugh Buildin			PE\ PHON	' W24075 PAUL CT. WAUKEE, WI 53072 HE: (262)-547-1200 WW.SUNVEST.COM
AL INSPECT				
ECTRIC: ILDING:				
HER:				
NTRACTOR S	SHALL BE KNOWLEDGEABLE OF ANY LOCAL AHJ INSPECTIONS REQUIRED NOT LISTED.			
	NOTES	1		
THE APPLI UNMANNED	CANT PROPOSES TO INSTALL PV MODULES AND WEATHER PROOF EQUIPMENT FOR AN FACILITY.			
EQUIPMENT REQUIRED.	T IS UNMANNED AND NOT FOR HUMAN HABITATION, HANDICAP ACCESS IS THEREFORE NOT			
CONTRACT ERECTION THE ENGIN	OR SHALL FIELD VERIFY ALL EXISTING CONDITIONS AND DIMENSIONS PRIOR TO FABRICATION AND OF ANY MATERIAL. NON-CONFORMING CONDITIONS SHALL BE BROUGHT TO THE ATTENTION OF IEER.			
	ILY FABRICATED, DAMAGED OR OTHERWISE MISFITTING OR NON-CONFORMING MATERIALS OR S SHALL BE IMMEDIATELY REPORTED TO THE ENGINEER AND DEVELOPER FOR REMEDIAL OR /E ACTION.			
EQUIPMENT	OR SHALL PROVIDE PROTECTIVE MATERIALS TO PREVENT DAMAGE TO EXISTING BUILDINGS OR T AND PROPOSED BUILDINGS OR EQUIPMENT. ENT AND USE OF THE SITE WILL CONFORM TO ALL APPLICABLE CODES AND ORDINANCES.			
	ENGINEERING			
RI III	DING			
DUIL				
	CTRICAL	— Р	ROFESSIONAL	ENGINEER STAMP
ELE		I hereby certify that this plan, specification, or report was prepared by me or under my direct supervision and that I am a duly Licensed Professional Engineer under the laws of the state of <u>WISCONSIN</u> . It should be noted that those plan sheets identified with an (*) have been prepared and certified by others and have been included herein for informational purposes only.		
				DATE
		F		
DWG		E		
NO:	DRAWING INDEX	c		
	SHEET TITLE	в		
T-1.00	TITLE SHEET	A		
PV-1.00	ARRAY LAYOUT		DATE WN BY: RS	DESCRIPTION CHECKED BY:
E-1.00 E-1.01	ONE-LINE DIAGRAM GROUNDING ONE-LINE		E: AS NOTE	
E-2.00	COMMUNICATION DIAGRAM			
D-1.00 D-2.00	EQUIPMENT PAD PLAN VIEW DETAIL EQUIPMENT PAD SIDE VIEW DETAIL			DATA HOLDINGS
D-2.00 D-3.00	FOUNDATION EMBEDMENT AND DETAIL		JEC L	DATA HULDINGS
E-3.00	SPEC SHEETS	-		
E-3.01 E-4.00	SPEC SHEETS NEC LABELS	3	135 W	HIGHLAND BLVD
E-4.00 GN-1	GENERAL NOTES	1	MIL	WAUKEE, WI
		1		
		⊢		SHEET TITLE
IT IS	A VIOLATION OF THE LAW FOR ANY PERSON UNLESS THEY ARE ACTING UNDER THE]		
EXPLI	TION OF A LICENSED PROFESSIONAL ENGINEER TO ALTER THIS DOCUMENT. UNLESS CITLY AGREED TO BY THE ENGINEER IN WRITING, THE ENGINEER DISCLAIMS ALL ITY ASSOCIATED WITH THE REUSE, ALTERATION OR MODIFICATION OF THE CONTENTS		T	TITLE SHEET
HEREI	N.			
·	DO NOT SCALE DRAWINGS	DWG	6. NO.	
		1	-	-1.00
	CONTRACTOR SHALL VERIFY ALL PLANS & EXISTING DIMENSIONS & CONDITIONS ON			

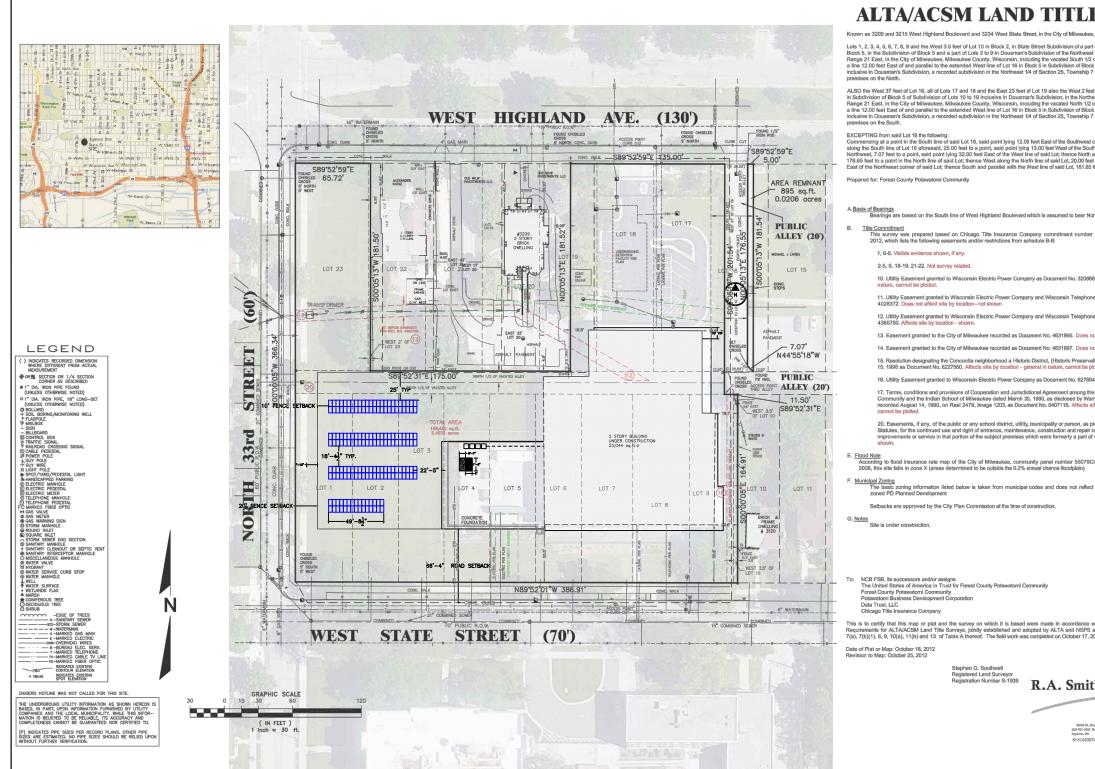


		N27 W24075 PAUL CT. PEWAUKEE, WI 53072 PHONE: (262)-547-1200 WWW.SUNVEST.COM
E SURVEY		
ee, winwarkee County, wisconsin. art of Block 4, Flynn's Subdivision, a part of isst 1/4 of Section 25, Township 7 North, 2 of all of the East-West alley lying West of ick 5 of Subdivision of Lots 10 to 19 7 North, Range 21 East, adjoining said		
eet of Lot 22 and all of Lot 23, all in Block 5 heast 1/4 of Section 25, Township 7 North, 2 of all of the East-West alley lying West of lok 5 of Subdivision of Lots 10 to 19 7 North, Range 21 East, adjoining said		
st corner of said Lot; running thence East utheast corner of said Lot 16; thence h and parallel with the West line of said Lot, set to a point, said point lying 12.00 feet 5 feet to the point of commencement.	al, Inc. —	
Survey No. 165207-RMK	Smith National, Inc.	
North 89°52'59° West. er 1294157, effective date of August 13,	A. Smith	
1682. Affects site by location - general in	- R.A	
one Company recorded as Document No.		
one Company recorded as Document No.		
not affect site by location - not shown.		
not affect site by location - not shown.		
ation Commission) recorded November plotted.		
642. Affects site by location - shown.		
he Forest County Potawatomi arranty Deed dated July 23, 1990 and site by location - general in nature,		
provided in Section 80.32(4) of the of underground or overground structures, of vacated alley. Affects site by location -		PROFESSIONAL ENGINEER STAMP
C0087E, effective date of September 26,		I hereby certify that this plan,specification,or report was prepared by me or under my direct supervision and that I am a duly
act all regulations that may apply - site is		Licensed Proressional Engineer under the laws of the state of <u>WISCONSIN</u> . It should be note that those plan sheets identified with an (*) have been prepared and certified by others and have been included herein for informational purposes only.
		DATE
		F
		E
		D
		C
		B
with the 2011 Minimum Standard Detail S and includes items 1, 2, 3, 4, 6(a), 6(b), 2012.		A DESCRIPTION
		REV DATE DESCRIPTION DRAWN BY: RS CHECKED BY:
		SCALE: AS NOTED JOB NO: 18-0214
th National, Inc	.	
		FCPC DATA HOLDINGS
Beyond Surveying and Engineering		TO DATA HOLDINGS
Bisenward Read, Brackleid Wi B305-666 P Roc 882-797-7373, www.exeenthindizealacem Groups Courty, GA Pillologh, PA 07/dwgl, AS211D30.DWG \ AS211D30		
SHEET 1 OF 1		3135 W HIGHLAND BLVD MILWAUKEE, WI
		SHEET TITLE SITE PLAN
		DWG. NO. C-1.00

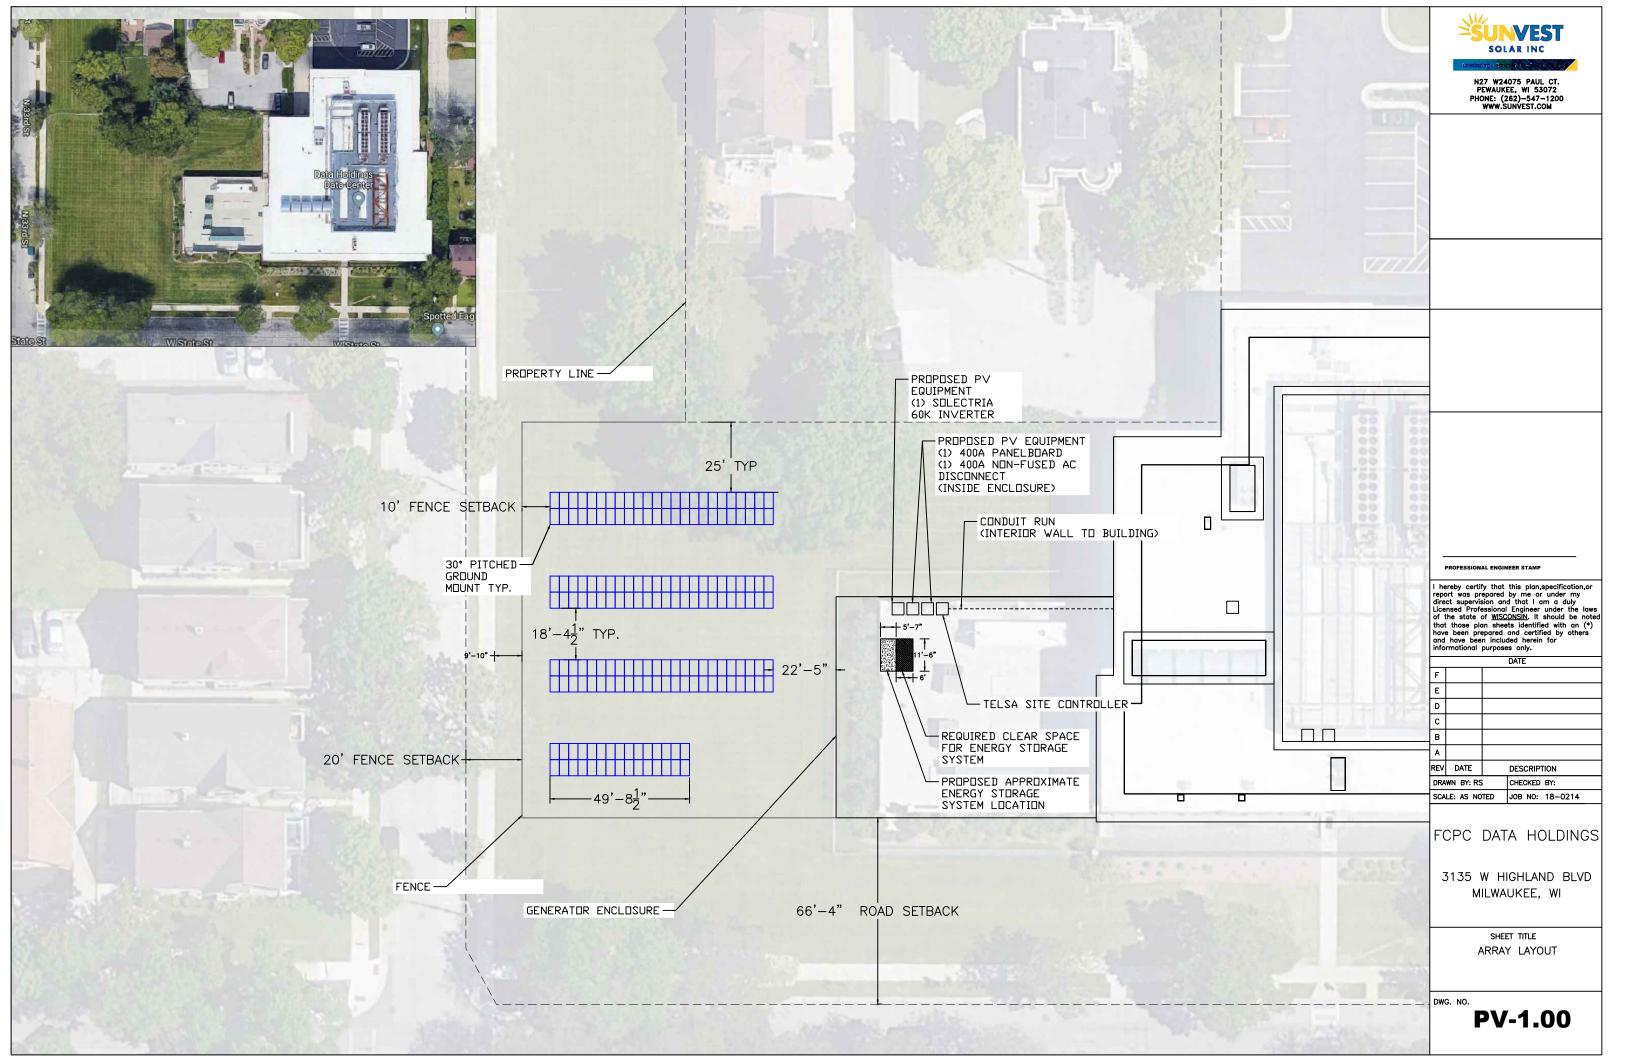


	PV SYSTEM DETAILS
ROOF TYPE:	GROUND MOUNT
DC SYSTEM SIZE:	
DC SYSTEM VOLTAGE:	1000 V
AC SYSTEM SIZE:	60 KW AC
MODULES	(174) HANWHA Q. PEAK DUO L-G5.3 400W
INVERTERS:	(1) SOLECTRIA XGI 1000 60/60
OPTIMIZERS:	N/A
RACKING:	UNIRAC
	N/A 180 DEG
AZIMUTH:	30 DEG GROUND MOUNTED PV


Conducto	or Sched	ule									Conduit	Sche
			Phase Conductor				Neutral	Neutral	Equipment Grounding	EGC		
ID	Sets		Quantity	Size	Insulation	Material		and the second second	Conductor	Quantity	Size	Тур
ACC-01		1		#3 AWG	THWN-2	CU	#8 AWG		#8 AWG		1-1/4"	EMT
ACC-02		1	3	#2/0 AWG	THWN-2	CU	#2/0 AWG	1	#6 AWG		2"	EMT
ACC-03		1	3	300 kcmil	THWN-2	CU	300 kcmil	1	#4 AWG	1	2-1/2"	EMT
ACC-04		1	2	#12 AWG	THWN-2	CU	#12 AWG	1	#12 AWG	1	3/4"	EMT
				Conductor	Schedule				Conduit S	chedule		
			Phase				Equipment					
			Conductor				Grounding	EGC				
ID	Sets		Quantity	Size	Insulation	Material	Conductor	Quantity	Size	Туре		
DCC-01		1	18	#10 AWG	PV WIRE	CU	#6 BARE	1	N/A	FREE AIR		
DCC-02		1	6	#10 AWG	PV WIRE	CU	#6 BARE	1	N/A	FREE AIR		

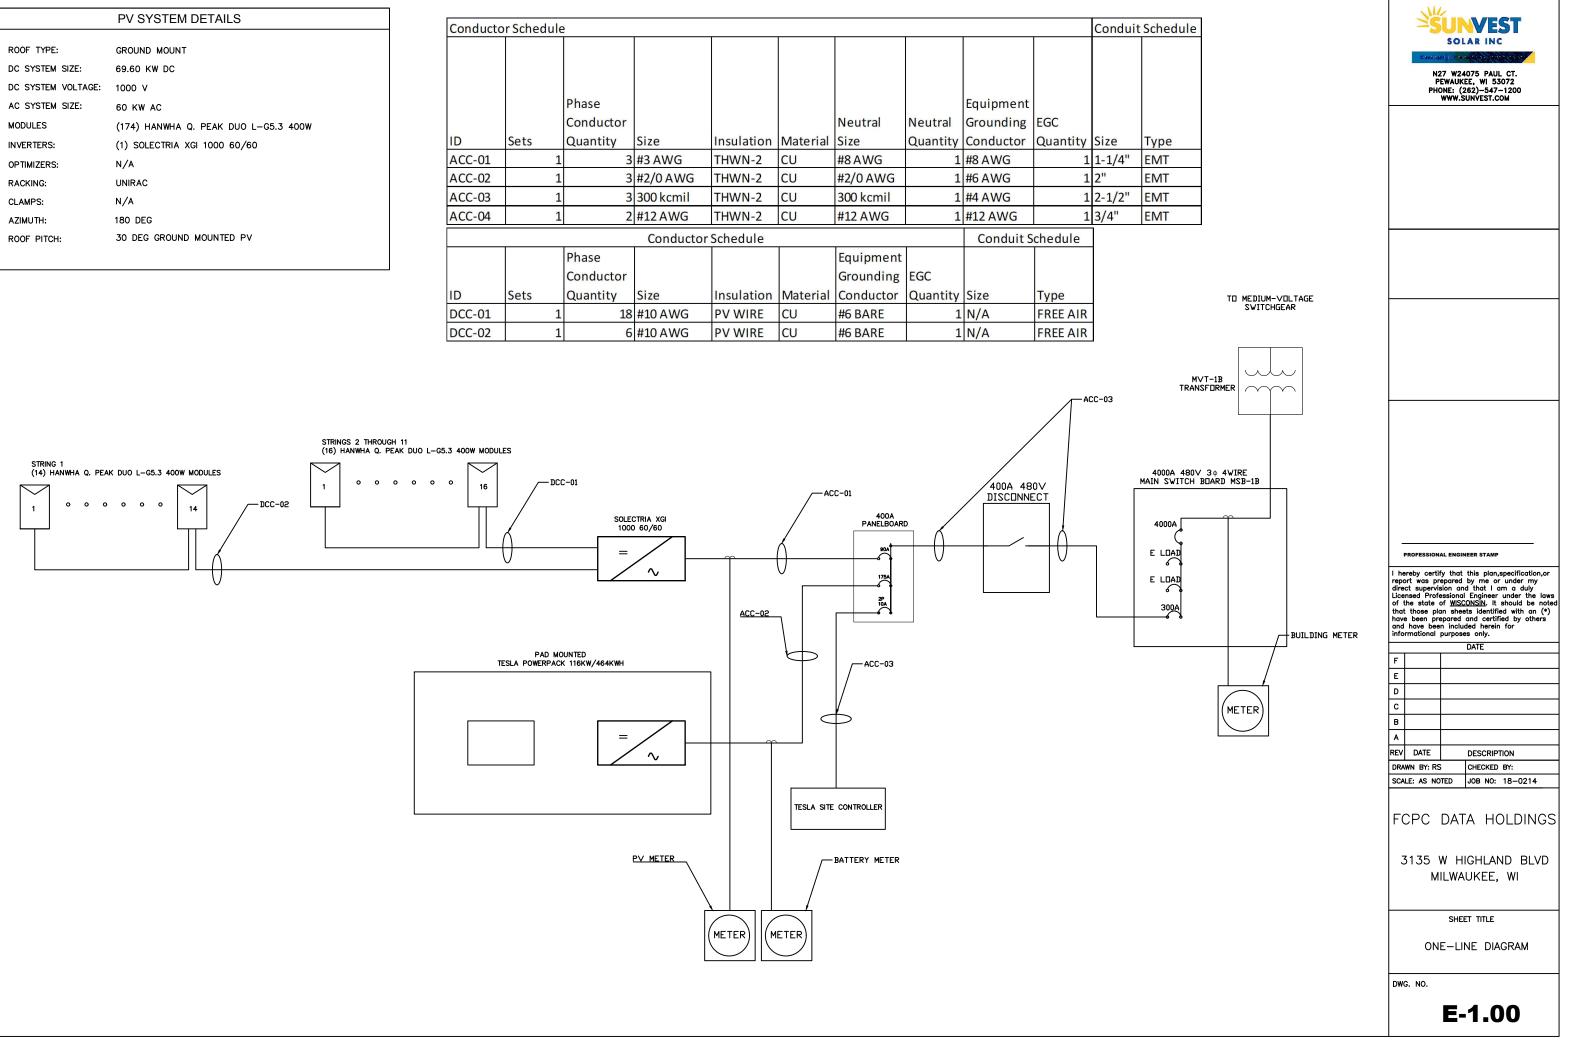


		PV SYSTEM DETAILS
	ROOF TYPE:	GROUND MOUNT
	DC SYSTEM SIZE:	69.60 KW DC
	DC SYSTEM VOLTAGE:	1000 V
	AC SYSTEM SIZE:	60 KW AC
	MODULES	(174) HANWHA Q. PEAK DUO L-G5.3 400W
	INVERTERS:	(1) SOLECTRIA XGI 1000 60/60
	OPTIMIZERS:	N/A
	RACKING:	UNIRAC
	CLAMPS:	N/A
	AZIMUTH:	180 DEG
	ROOF PITCH:	30 DEG GROUND MOUNTED PV
1	1	


	Equipment Grounding	EGC
ID	Conductor	Quantity
G-1	#8 AWG	1
G-2	#6 AWG	1
G-3	#4 AWG	1
G-4	#12 AWG	1

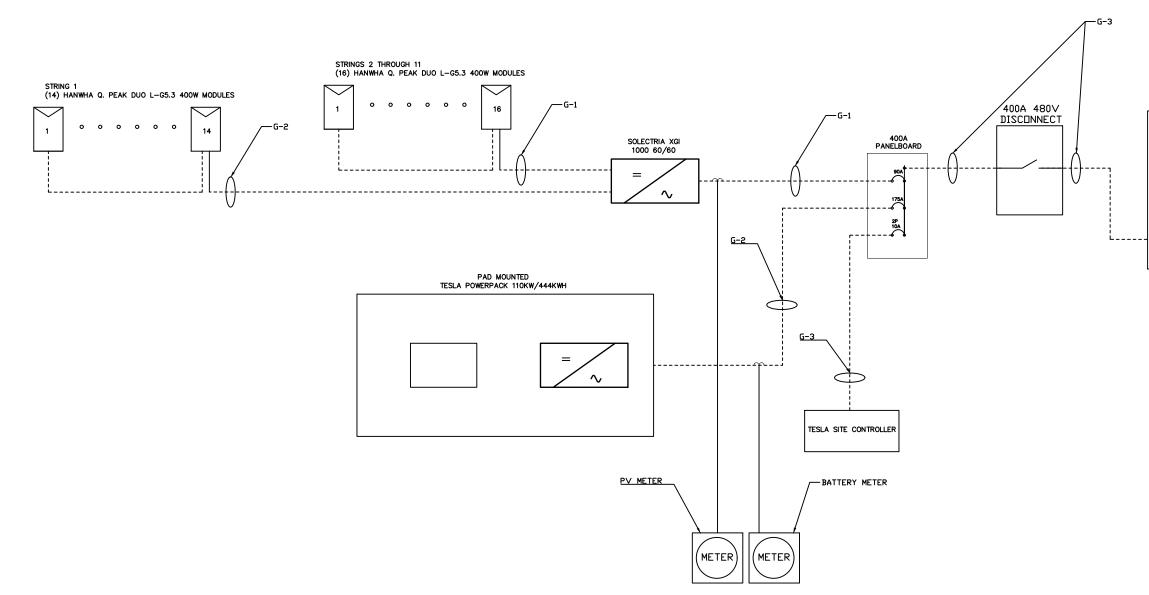

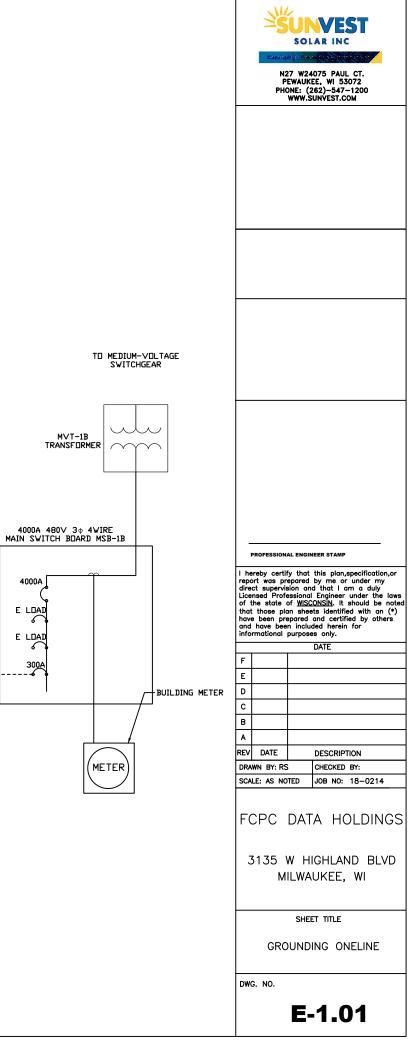


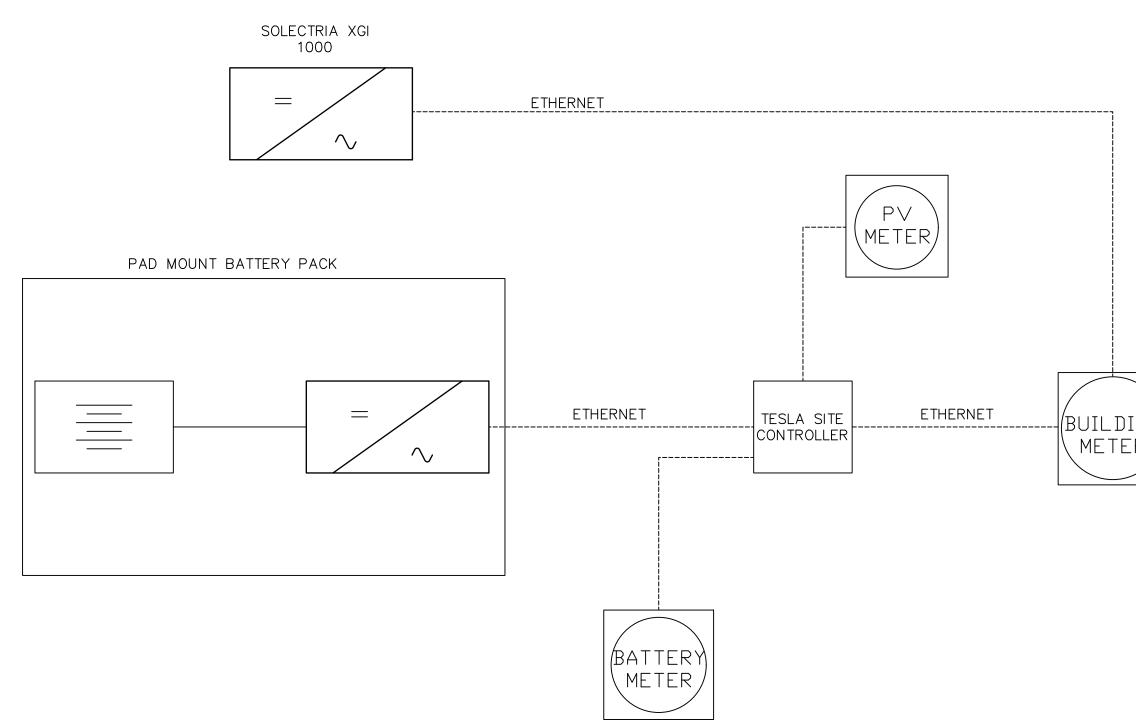

	N27 W24075 PAUL CT. PHONE: (262)-547-1200 WWW.SUNVEST.COM
SCHNEIDER PLC (BUILDING LOAD &	
EMERGENCY POWER STATUS)	PROFESSIONAL ENGINEER STAMP I hereby certify that this plan,specification,or report was prepared by me or under my direct supervision and that I am a duly Licensed Professional Engineer under the laws of the state of <u>WISCONSIN</u> . It should be noted that those plan sheets identified with an (*) have been prepared and certified by others and have been included herein for informational purposes only. DATE
	F
	FCPC DATA HOLDINGS 3135 W HIGHLAND BLVD MILWAUKEE, WI SHEET TITLE COMMUNICATION
	DIAGRAM

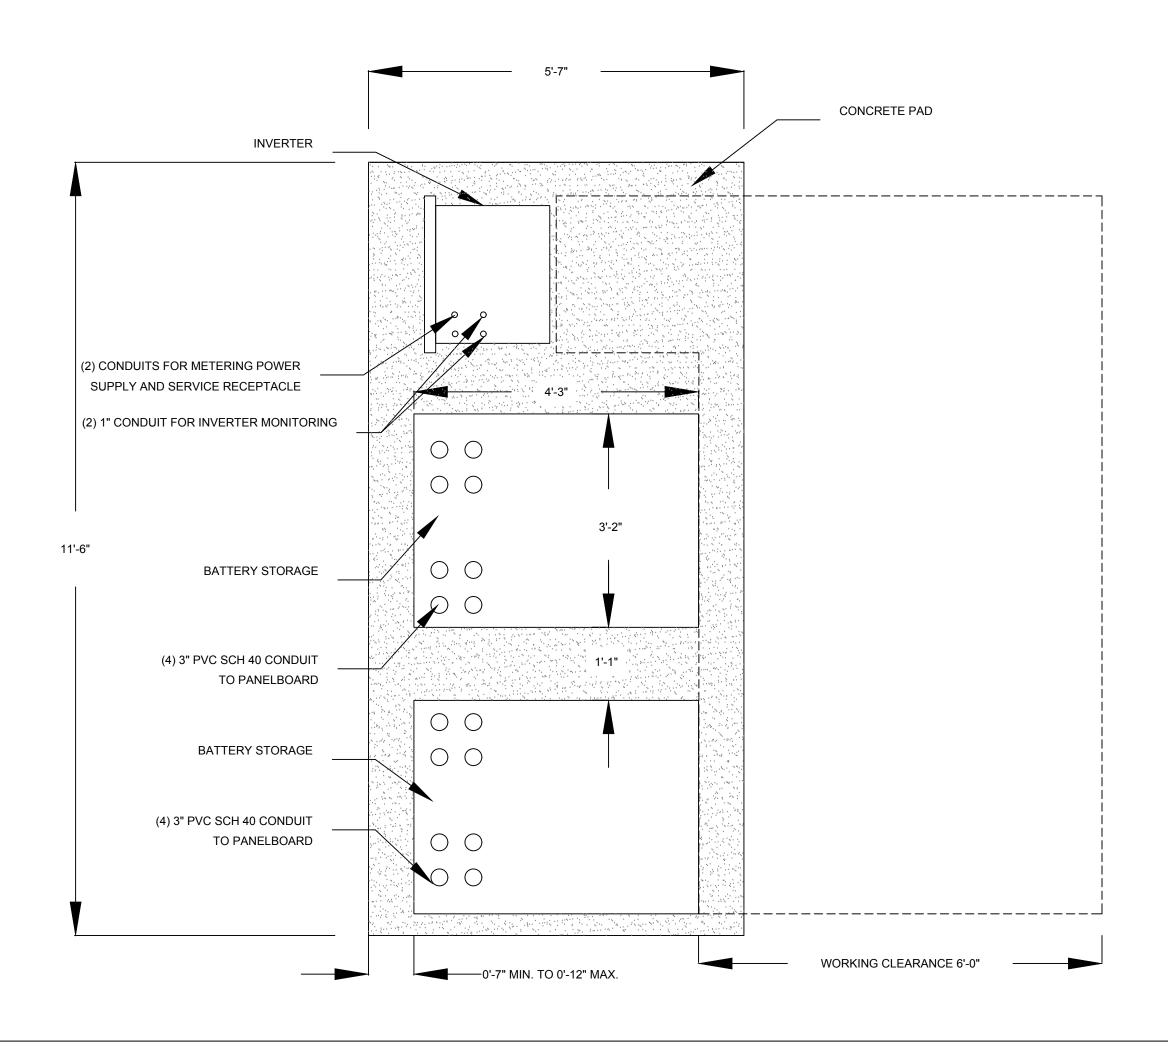

Developed space (Bachara and even of the and a							
N27 W24075 PAUL CT. PeWAUKEE, WI 53072 PHONE: (262)-547-1200 WWW.SUNVEST.COM							
		WWW.SUNVEST.COM					
-	PROFESSION	AL ENGINEER STAMP					
l he repo	ereby certif	fy that this plan,specification,or epared by me or under my sion and that I am a duly					
dire Lice of t	ct supervis insed Profe the state of	sion and that I am a duly essional Engineer under the laws of <u>WISCONSIN</u> . It should be noted					
l thai	t those plo	an sheets identified with an (*) epared and certified by others n included herein for					
info	rmational	purposes only. DATE					
F							
E D							
С							
B							
REV	DATE	DESCRIPTION					
DRA SCA	WN BY: RS						
F	СРС	DATA HOLDINGS					
-	7175 \						
3135 W HIGHLAND BLVD MILWAUKEE, WI							
	WILWAUKLE, WI						
		Sheet Title					
EQUIPMENT PAD							
		PLAN VIEW					
DW	G. NO.						
		D-1.00					

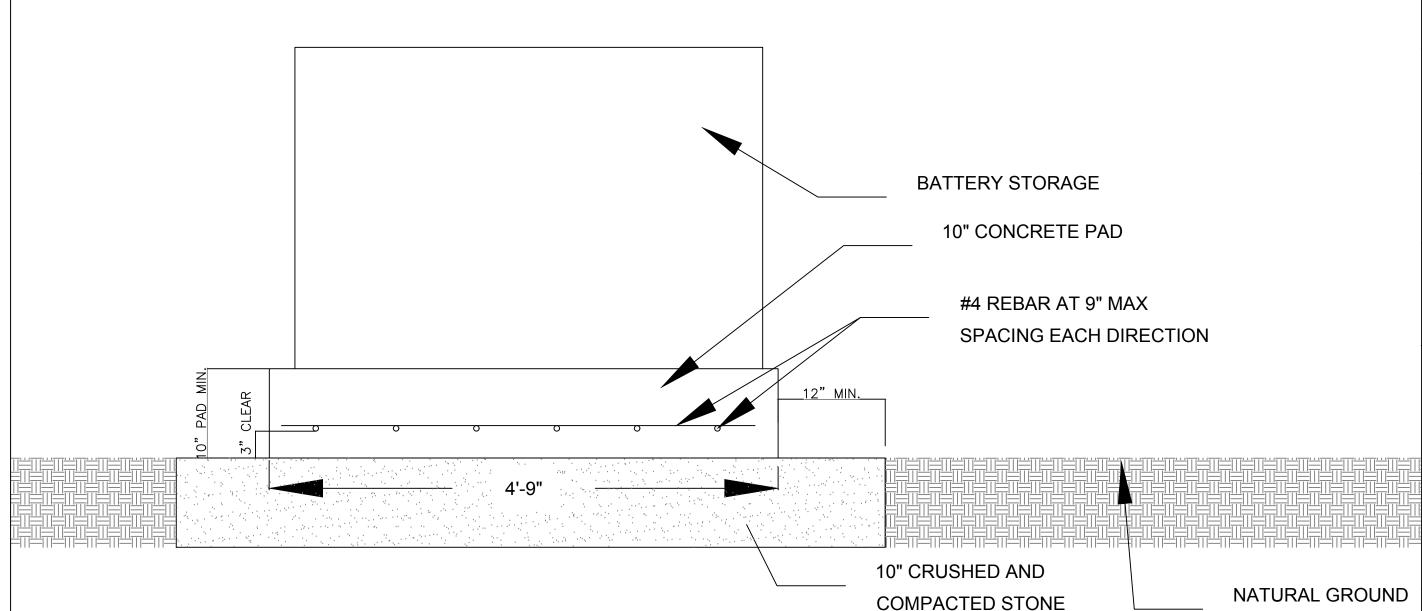


NOTES:


- SEE PAGE G-1.00 FOR CONCRETE SPECS •
- PAD SHALL BE FINISHED WITH A CLASS B FINISH •
- SLOPE PAD IN ONE PLANE A MIN OF 1% AND A MAX. • OF 2% TO ALLOW FOR POSITIVE DRAINAGE
- ENCLOSURES SHALL BE ANCHORED USING 5/8" • STAINLESS STEEL HILTI KB-TZ WEDGE ANCHORS OR APPROVED EQUAL

		N2 P	27 W24 EWAUKI	VEST AR INC 075 PAUL CT. EE, WI 53072 (52)-547-1200 UNVEST.COM
	I he repo dire Lice of f that have and	insed Profe the state (fy that epared sion an essional of <u>WISC</u> on shee epared n includ	this plan, specification, or by me or under my d that I am a duly Engineer under the laws ONSIN. It should be noted ts identified with an (*) and certified by others ded herein for
D				DATE
	F			
	Е			
	D			
	С			
	в			
	Α			
	rev	DATE		DESCRIPTION
		WN BY:RS		CHECKED BY:
	SCA	LE: AS NO	TED	JOB NO: 18-0214
	F	CPC	DAT	A HOLDINGS
				IGHLAND BLVD UKEE, WI
		EQ	UIPM	et tiffle IENT PAD I VIEW
	DWO	G. NO.		
			D	2.00




N27 W24075 PAUL CT. PEWAUKEE, WI 53072 PHONE: (262)-547-1200 WWW.SUNVEST.COM							
-	PROFESSION	AL ENGIN	EER STAMP				
I he repo dire Lice of t that have and	ereby certif ort was pro- ct supervis nsed Profe the state of	fy that epared sion and essional of <u>WISC</u> an shee epared n includ	this plan by me o d that l Engineer <u>ONSIN</u> . It its identifi and certifi ded herein	specification,or r under my am a duly under the laws should be noted ied with an (*) fied by others n for			
_			DATE				
F							
D							
c							
в							
A							
			DESCRIP				
	WN BY: RS		CHECKED	18-0214			
				OLDINGS			
3135 W HIGHLAND BLVD MILWAUKEE, WI							
SHEET TITLE SPEC SHEETS							
DWG. NO. E-3.00							

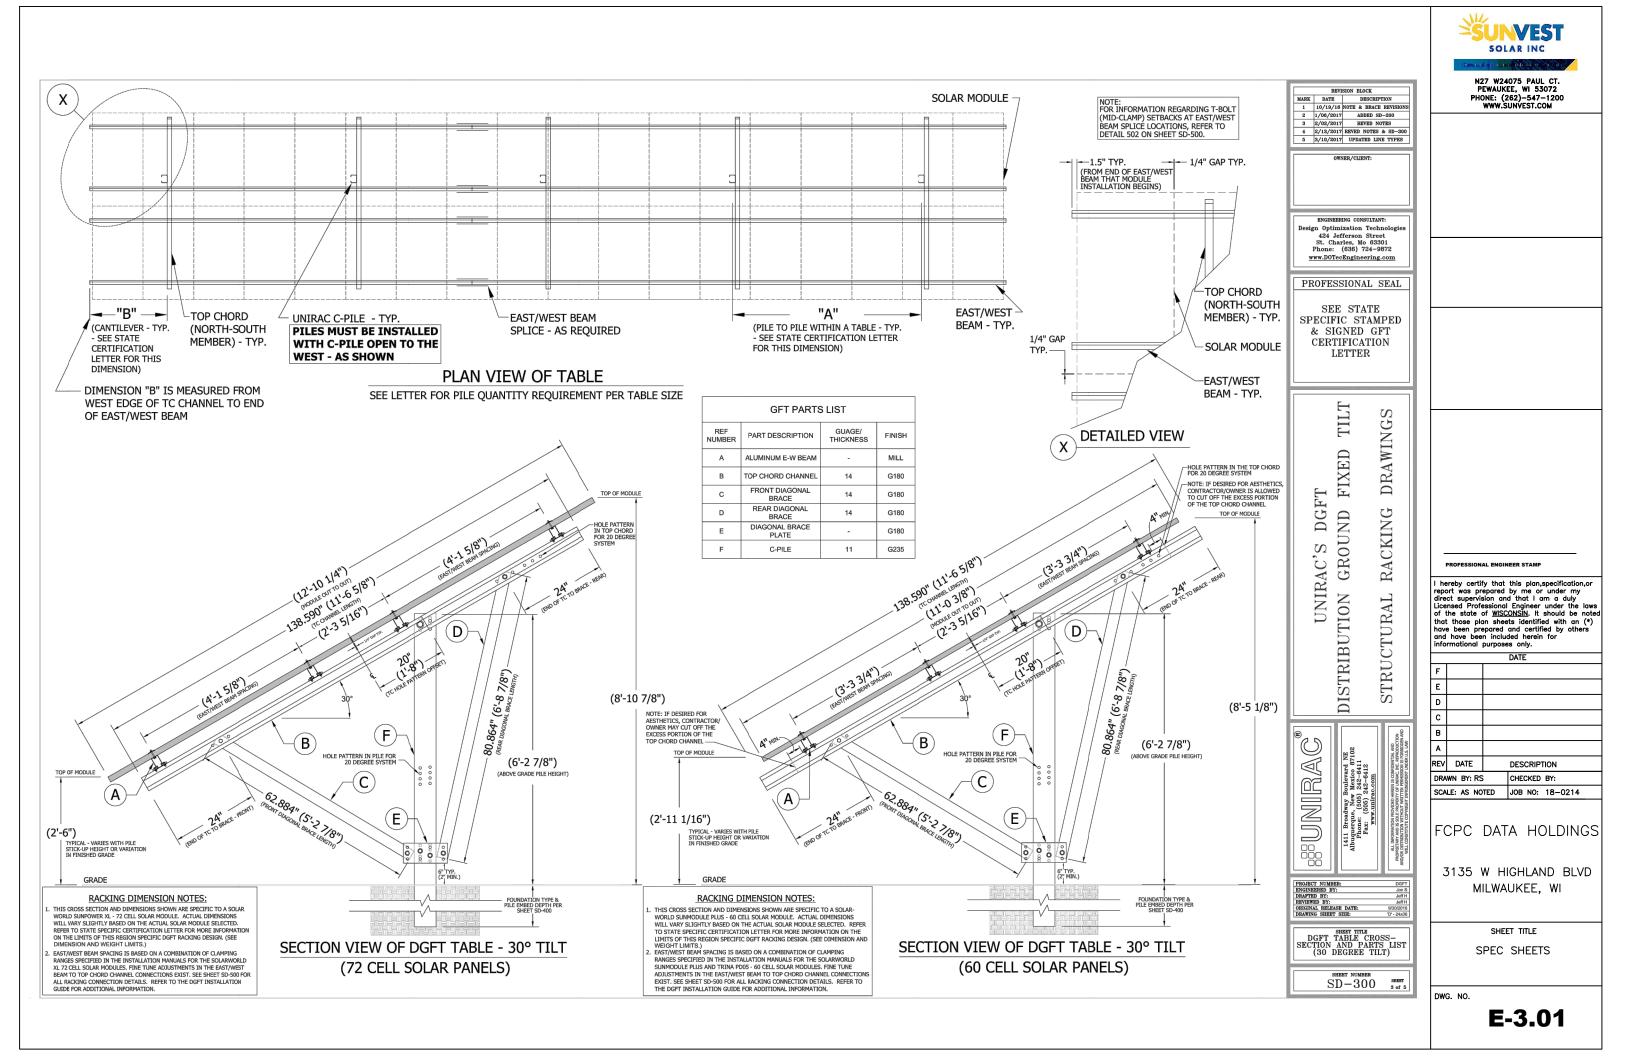

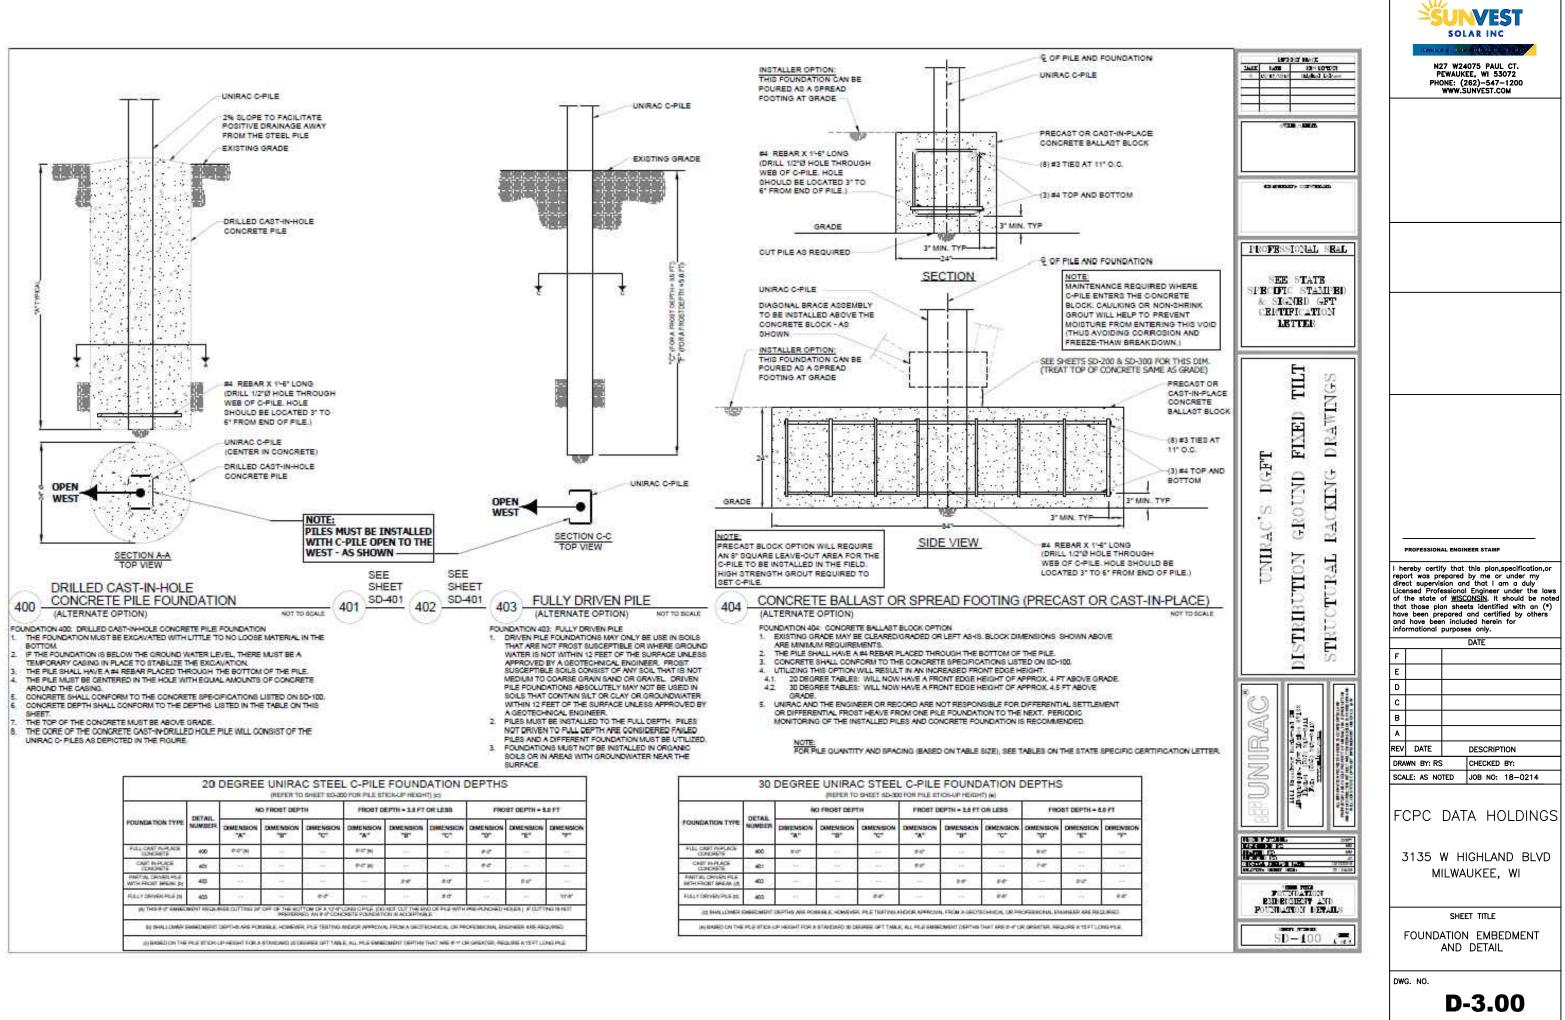

FOUNDATION TYPE	DETAIL	NO FROST DEPTH			FROBT DEPTH + 1.1 FT OR LESS			FROBT DEPTH + 8.0 FT		
		DIMENSION "A"	DIMENSION TET	DIMENSION	DMENSION	DIMENSION "B"	DIMENSION	DIMENSION "D"	DIMENSION "E"	DIMENSION "9"
FIGLICAST INFRACE CONSIECE	400	0.0.00	18		***	τt:	H1	10		÷t:
CARLINERLACE TEXTS/9676	-		S	šπ.	44.94	- e - Š	- m - 5	60	∛ाπ हे	
PARTIAL DRIVEN PLE WITH FROMT BREAK BY	40	222	<u> </u>	<u></u>	<u> </u>	24	40	1.000	545	
FLELY DRIVEN PLE IN	400	1 m	14	00	- R	jan .	50			iorar
IN THIS IF IT HAVE	MENT RECENT	NER CUTTING OF	OF OF THE ROT	TOR OF A 17-IT I	CHE OPIE IN	NOT OUT THE EP	NO OF PLE WITH	REAMONED	oses) # cum	NGINNET

FOUNDATION TYPE	DETAIL	NO FROST DEPTH			FROST DEPTH = 3.6 FT OR LESS			FROST DEPTH = 0.0 FT		
		DIMENSION "A"	DIMENSION "B"		DIMENSION "A"	DIMENSION "B"	CHMENSION	OMENSION "O"	DIMENSION "E"	DAMENDION "P"
FILL CRET IN PLACE CONDERFIS	600	80	(H)	5441	89	(++-		80	(44)	0.00
CARLIN-PLACE CENCRETE	421	- m 8			94	e	5	. Per		100
PARTIAL CRIVEN PLE WTH FRIDET SPEAK (d)	400	10	al		1	24		12	50	120
FULLY DRIVEN PLE (III	-005	+1	- AL	24	[12]	(##)	10	J W	- (in)	er.
IC SHALLONER	CHRISTING IT	DEPTHS ARE POR	IN R. F. HOWEVE	R. PR.E. TIBET ING.	HOLER APPROVE	L FROM A GEOR	ENHIELAL OR PR	OFERRICHAL EN	UNITED ARE REC	2.661

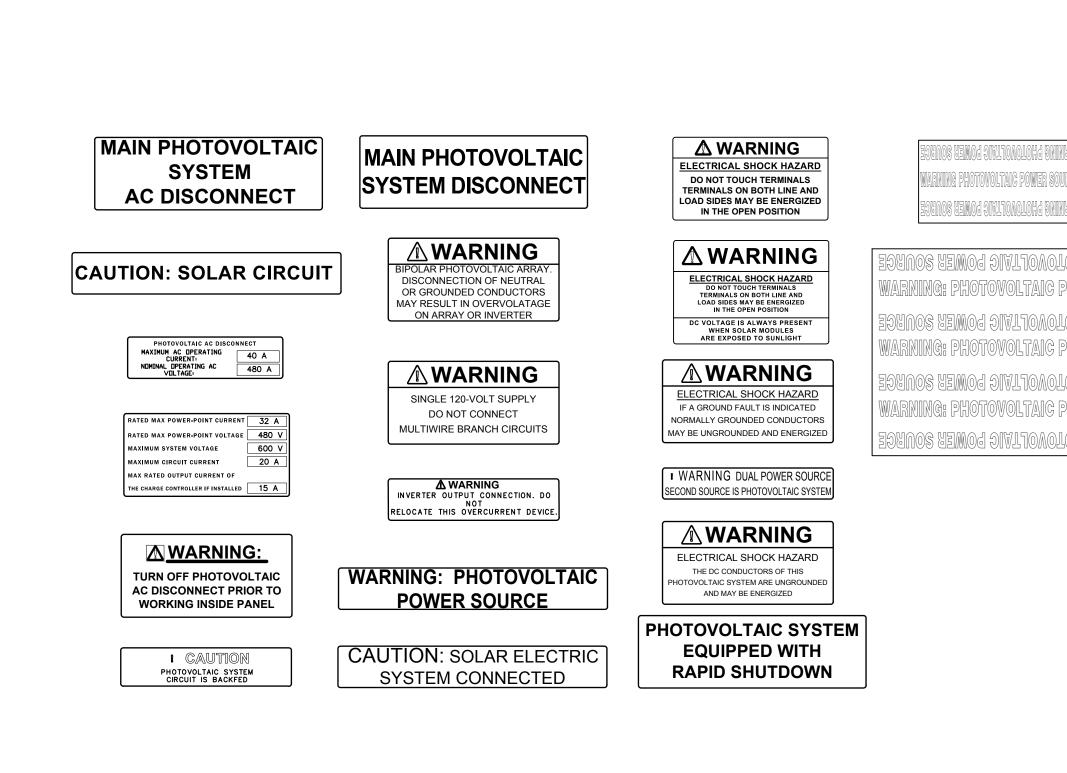

	SOLAR INC CONVERSION OF ADDRESS N27 W24075 PAUL CT. PEWAUKEE, WI 53072 PHONE: (262)–547–1200 WWW.SUNVEST.COM
NM RGE NM OHIG FONINEIAW OOWER SOURGE OHIG FONINEIAW OOWER SOURGE	
ower source ohd foningam	PROFESSIONAL ENGINEER STAMP I hereby certify that this plan,specification,or report was prepared by me or under my direct supervision and that I am a duly Licensed Professional Engineer under the laws of the state of <u>WISCONSIN</u> . It should be noted that those plan sheets identified with an (*) have been prepared and certified by others and have been included herein for informational purposes only. DATE
	F
	FCPC DATA HOLDINGS 3135 W HIGHLAND BLVD MILWAUKEE, WI SHEET TITLE LABELS DWG. NO. E-4.00

1. GENERAL REQUIREMENTS:

- 1.1 THE WORK TO BE DONE UNDER THIS PROJECT INCLUDES PROVIDING ALL EQUIPMENT, MATERIALS, LABOR AND SERVICES NOT INCLUDED IN THE B.O.M. AND PERFORMING ALL OPERATIONS FOR COMPLETE AND OPERATING SYSTEMS. ANY WORK NOT SPECIFICALLY COVERED BUT INCESSSARY TO COMPLETE THIS INSTALLATION, SHALL BE PROVIDED. ALL GUIPMENT AND WIRING TO BE NEW AND PROVIDED UNDER THI CONTRACT UNLESS OTHERWISE NOTED.
- 1.2 ENTIRE INSTALLATION, INCLUDING MATERIALS, EQUIPMENT AND WORKMANSHIP, SHALL CONFORM TO THE 2017 EDITION OF THE NATIONAL ELECTRIC CODE (NEC) AS WELL AS ALL APPLICABLE LAWS AND REGULATIONS AND REQULATORY BODIES HAVING JURISOCTION OVER THIS WORK:
- 1.3 THE TERM "FURNISH" SHALL MEAN TO OBTAIN AND SUPPLY TO THE JOB SITE. THE TERM "INS SHALL MEAN TO FIX IN POSITION AND CONNECT FOR USE. THE TERM "ROVIDE" SHALL MEAN FURNISH AND INSTALL. THE TERM "CONTRACTOR" SHALL MEAN ELECTRICAL CONTRACTOR.
- 1.4 ONLY WRITTEN CHANGES AND/OR MODIFICATIONS APPROVED BY THE ENGINEER, CONSULTING ENGINEER OR OWNER'S REPRESENTATIVE WILL BE RECOGNIZED.
- 1.5 THE ELECTRICAL CONTRACTOR SHALL SUBMIT, FOR THE ENGINEER'S APPROVAL, DETAILED SHOP
- 1.6 CONTRACTOR SHALL COORDINATE WITH SPECIFICATIONS PROVIDED BY OTHER TRADES.
- 1.7 PROVIDE OPERATING AND MAINTENANCE MANUALS, PER SPECIFICATIONS, AND GIVE INSTRUCTIONS TO USER FOR ALL EQUIPMENT AND SYSTEMS PROVIDED UNDER THIS CONTRACT AFTER ALL ARE CLEANED AND OPERATING.
- 1.8 KEEP PREMISES FREE FROM RUBBISH. REMOVE ALL ELECTRICAL RUBBISH FROM SITE.
- 1.9 ALL WORK SHALL BE INSTALLED CONCEALED UNLESS OTHERWISE NOTED.
- 1.10 THE WORK SHALL INCLUDE ALL PANELS, DEVICES, FEEDERS AND BRANCH CIRCUIT WRING AS REQUIRED FOR THE DISTRIBUTION SYSTEM INDICATED AND CALLED FOR ON THE DRAWINGS, REQUIRED DY SPECIFICATIONS AND AS INCESSARY FOR COMPLETE FUNCTIONAL SYSTEMS PRESENTED AND INTENDED.
- 1.11 THE CONTRACTOR SHALL FURNISH ALL MATERIAL, LABOR, TOOLS, EQUIPMENT, CONSUMABLES AND SERVICES REQUIRED FOR OBTAINING, DELIVERY, INSTALLATION, CONNECTION, DISCONNECTION, REMOVAL, RELOCATION, REPAR, REPLACEMENT, TESTING AND COMMISSIONING OF ALL EQUIPMENT AND DEVICES INCLUDED IN OR INCESSARY FOR THE WORK, AS APPLICABLE. THIS INCLUDES SCAFFOLDING, LADDERS, RIGGING, HOSTING, ETC.
- 1.12 ELECTRICAL WORK SHALL INCLUDE ALL REQUIRED CUTTING, PATCHING AND THE FULL RESTORATION OF WALL AND FLOOR STRUCTURE AND SURFACES. ALL EQUIPMENT, WALLS, FLOORS, ETC., DISTURBED OR DAMAGED DURING CONSTRUCTION SHALL BE REPAIRED TO THE SATISFACTION OF THE OWNER, AT THE CONTRACTORS EXPENSE.
- 1.13 BEFORE SUBMITTING HIS BID, THE CONTRACTOR SHALL FULLY AQUAINT HIMSELF/HERSELF WITH THE JOB CONDITIONS AND DIFFICULTIES THAT WILL PERTAIN TO THE EXECUTION OF THIS WORK. SUBMISSION OF A PROPOSAL WILL BE CONSTRUED AS EVENCE THAT SUCH AN EXAMINATION HAS BEEN MADE. LATER CLAIMS WILL NOT BE RECOGNIZED FOR EXITA LABOR, EQUIPMENT OR MATEMALS REQUIRED BECAUSE OF DIFFICULTIES ENCOUNTEED, WHICH COULD HAVE BEEN FORESEEN HAD SUCH AN EXAMINATION BEEN
- 1.14 THE CONTRACTOR SHALL CONFIRM THE LOCATION OF ALL UTILITIES. THE CONTRACTOR IS RESPONSIBLE FOR REPAIRING ANY DAMAGE TO EXISTING UTILITIES.
- 1.15 UPON COMPLETION OF THE ELECTRICAL WORK, THE CONTRACTOR SHALL TEST THE COMPLETE ELECTRICAL SYSTEM FOR SHORTS, GROUNDS, AND PROPER OPERATION, IN THE PRESENCE OF THE OWNER'S REPRESENTATIVE.
- 1.16 UPON COMPLETION OF WORK, THE CONTRACTOR SHALL CLEAN AND ADJUST ALL EQUIPMENT AND LIGHTING AND TEST SYSTEMS TO THE SATISFACTION OF OWNER AND ENGINEER. RESULTS SHALL BE SUBMITTED TO THE ENGINEER FOR APPROVAL.
- 1.17 THE CONTRACTOR SHALL FIELD VERIFY DIMENSIONS OF FINISHED CONSTRUCTION PRIOR TO FABRICATION AND INSTALLATION OF FIXTURES AND EQUIPMENT.
- 1.18 EXACT ROUTING OF CONDUITS AND "MC" CABLES SHALL BE DETERMINED IN THE FIELD.
- 1.19 IF THE OWNER AND/OR HIS REPRESENTATIVE CONSIDERS ANY WORK TO BE INFERIOR, THE RESPECTIVE CONTRACTOR SHALL REPLACE SAME WITH CONTRACT STANDARD WORK WITHOUT ADDITIONAL CHARGE / WORK SHALL BE DONE IN A NEAT, WORKMANLIKE MANNER, LEFT CLEAN AND FREE FROM DEFECTS, AN COMPLETELY OPERABLE.
- 1.20 THE CONTRACTOR SHALL PROVIDE ALL MATERIALS AS SHOWN ON THE DRAWINGS AND/OR AS SPECIFIED ALL MATERIALS SHALL BE NEW, AND BEAR THE UL LABEL ALL WORK SHALL BE GUARANTED BY THE CONTRACTOR FOR A PERIOD OF ONE (1) YEAR FROM THE DATE OF ACCEPTANCE BY THE OWNER.
- 1.21 DRAWINGS ARE TO BE CONSIDERED DIAGRAMMATIC, AND SHALL BE FOLLOWED AS CLOSELY AS CONDITIONS ALLOW TO COMPLETE THE INTENT OF THE CONTRACT. THE DRAWINGS AND SPECIFICATIONS COMPLMENT ONE ANOTHER, AND WHAT IS SHOWN ON THE DRAWINGS AND NOT MENTIONED IN THE SPECIFICATIONS, AND VICE VERSA, IS TO BE INCLUDED IN THE SCOPE OF WORK.
- 1.22 ALL EQUIPMENT CONNECTIONS SHALL BE INSTALLED PER APPLICABLE SEISMIC REQUIRMENTS.
- 1.23 ENGINEER WILL MAKE A FINAL INSPECTION WITH THE OWNER AND CONTRACTOR AND WILL NOTIFY THE CONTRACTOR IN WRITING OF ALL PARTICULARS IN WHICH THIS INSPECTION REVEALS THAT THE WORK IS INCOMPLETE OR DEFECTIVE. THE CONTRACTOR SHALL IMMEDIATELY TAKE SUCH MEASURES AS ARE NECESSARY TO COMPLETE SUCH WORK OR REMEDY SUCH DEFICIENCIES.
- 1.24 THE CONTRACTOR SHALL PERFORM ALL EXCAVATION, TRENCHING AND BACKFILL REQUIRED FOR Electrical work. Backfill shall be suitable material properly compacted to go density in Each layer of SX (5) inch depth. Conduit shall be minimum 56 below finished grade.

2. PROJECT COORDINATION:

- 2.1 THE CONTRACTOR SHALL VERIFY FIELD CONDITIONS AT THE SITE AND NOTIFY THE OWNER OF ANY DISCREPANCIES, PRIOR TO COMMENCING WITH THE WORK.
- 2.2 THE CONTRACTOR SHALL REVIEW AND COORDINATE WITH THE DOCUMENTS OF ALL TRADES.
- 2.3 THE CONTRACTOR SHALL FURNISH A SCHEDULE INDICATING HIS PORTION OF TIME, WITHIN THE OVERALL SCHEDULE, REQUIRED TO COMPLETE THE WORK, IN COMJINCTION WITH ALL TRADES. ALL WORK THAT MAY AFFECT OPERATION OF BUILDING SYSTEMS SHALL BE COORDINATED WITH THE OWNER'S REPRESENTATIVE.
- 2.4 REFER TO THE CONSTRUCTION DRAWINGS AND APPROPRIATE VENDORS APPROVED DIMENSIONED LAYOUT DRAWINGS FOR THE LOCATIONS OF ALL ELECTRICAL DEVICES AND EQUIPMENT. A. EXTERIOR, BUILDING MOUNTED LUMINARIES B. SWITCHES
- 2.5 REFER TO THE PLUMBING DRAWINGS (IF APPLICABLE) FOR THE LOCATIONS OF THE FOLLOWING:
- 2.6 SHUT DOWN OF POWER SHALL BE COORDINATED WITH THE OWNER, ARCHITECT AND PROJECT MANAGER AT LEAST 14 WORKING DAYS PRIOR TO SHUT DOWN. SHUT DOWNS LONGER THAN 2 DAYS SHALL BE COORDINATED WITH THE ABOVE PERSONNEL AT LEAST ONE MONTH IN ADVANCE. TEMPORARY POWER FOR CONSTRUCTION SHALL BE PROVIDED BY THE ELECTRICAL CONTRACTOR FOR SWIT DOWNS OVER 2 DAYS.
- 2.7 ALL CONDUITS AND DEVICE BOXES SHALL BE PROVIDED BY THE ELECTRICAL CONTRACTOR, INCLUDING ALL
- 2.8 EXACT LOCATIONS OF OUTLETS AND EQUIPMENT SHALL BE COORDINATED WITH ARCHITECTURAL AND MILLWORK PLANS. ALL OUTLET AND EQUIPMENT LAYOUTS SHALL BE VERIFIED AND COORDINATED WITH WORK OF OTHER TRADES.
- 2.9 PROVIDE TEMPORARY LIGHTING AND POWER IN ACCORDANCE WITH ARTICLE 305 OF THE NEC. TEMPORAF LIGHTING FIXTURES IN UNFINISHED AREAS SHALL REMAIN CONNECTED UNTIL REMOVAL IS REQUESTED BY THE CONTRACTOR.
- 2.10 COLORS AND FINISHES OF ALL LIGHTING FIXTURES SHALL BE AS DETERMINED BY THE PROPERTY OWNER WHO SHALL SELECT SAME FROM THOSE AVAILABLE AS STANDARD OF THE EQUIPMENT SPECIFIED. PROVIDE CUSTOM ENGRAVING FOR ALL DIMMER SWITCHES.
- 2.11 THE CONTRACTOR SHALL CONTACT THE BUILDING MANAGER TO OBTAIN A COPY OF THE GENERAL REQUIREMENTS AND/OR CONDITIONS TO BE USED FOR THIS PROJECT.
- 2.12 INSTALL NEW WORK AND CONNECT TO EXISTING WORK WITH MINIMUM INTERFERENCE TO EXISTING FACILITIES. ALARM AND EMERGENCY SYSTEMS SHALL NOT BE INTERRUPTED. TEMPORARY SHUT DOWNS OF ANY SYSTEM SHALL BE COORDINATED WITH AND APPROVED BY THE OWNER AND ARCHITECT.
- 2.13 CONTRACTOR SHALL VERIFY ALL EQUIPMENT POWER REQUIREMENTS AND REQUIRED OUTLET TYPES WITH FOUNDMENT MANUFACTURER AND OWNER PRIOR TO POWER DISTRIBUTION AND RECEPTACIE INSTALLATION

3. PROTECTION OF WORK:

3.1 EFFECTIVELY PROTECT ALL MATERIALS AND EQUIPMENT FROM ENVIRONMENTAL AND PHYSICAL DAMAGE UNTIL FINAL ACCEPTANCE. CLOSE AND PROTECT ALL OPENINGS DURING CONSTRUCTION. PROVIDE NEW MATERIALS AND EQUIPMENT TO REPLACE TIEMS DAMAGED.

4. WARRANTIES

- 4.1 ALL MATERIALS AND EQUIPMENT SHALL BE GUARANTEED IN WRITING FOR A MINIMUM OF ONE YEAR AFTER FINAL ACCEPTANCE BY OWNER.
- 4.2 WORKMANSHIP SHALL BE GUARANTEED IN WRITING FOR A MINIMUM OF 5 YEARS AFTER FINAL
- 4.2 OBTAIN AND DELIVER TO THE OWNER'S REPRESENTATIVE ALL GUARANTEES AND CERTIFICATES OF
- 5. PERMITS:
- 5.1 CONTRACTOR SHALL OBTAIN AND PAY FOR ALL REQUIRED PERMITS AND INSPECTION FEES FOR ELECTRICAL WORK.

6. RACEWAYS:

- 6.1 ALL CONDUIT SHALL BE MINIMUM SIZE OF 3/4" FOR POWER CIRCUITS AND CONTROL CIRCUITS EXCEPT WHERE FLEXIBLE CONDUIT IS CALLED FOR ON PROJECT DOCUMENTS. ALL EXTERIOR EXPOSED CONDUIT SHALL BE GRC (GAIVANZED RIGD METAL CONDUIT). ALL UNDEROUND, IN SLAB OR UNDER SLAB SHALL BE RNC (RIGID NONMETALLIC CONDUIT). CHANGE TO RIGID METALLIC CONDUIT FOR SUBJECT TO DAMAGE. METALLIC CONDUIT EFFORE EXTING OUT OF CONCRETE OR PRETRATING A WALL, FLOOR OR ROOF. EMT IS ALLOWED IN INTERIOR DRY LOCATIONS WHERE NOT SUBJECT TO DAMAGE.
- 6.2 ALL FLEXIBLE CONDUIT IN WET OR DRY AREAS SHALL BE LIQUID TIGHT CONDUIT. NONMETALLIC FLEXIBLE CONDUIT IS SPECIFICALLY PROHIBITED.
- 6.3 CONDUIT SHALL BE RUN AT RIGHT ANGLES AND PARALLEL TO BUILDING LINES, SHALL BE NEATL RACKED AND SECURELY FASTENED. JUNCTION BOXES SHALL BE PROVIDED WHERE REQUIRED TO FACILITATE INSTALLATION OF WIRES.
- 6.4 ALL CONDUIT AND ELECTRICAL EQUIPMENT SHALL BE SUPPORTED FROM THE BUILDING STRUCTURE IN AN APPROVED MANNER.
- 6.5 ALL EMPTY RACEWAYS SHALL BE FURNISHED WITH A 200 LB. TEST NYLON DRAG LINE.
- 6.6 ARRANGEMENT OF CONDUIT AND EQUIPMENT SHALL BE AS INDICATED, UNLESS MODIFICATION IS REQUIRED TO AVOID INTERFERENCES.
- 6.7 ALL RACEWAY AND WIRING SHALL BE CONCEALED IN FINISHED AREAS. RACEWAY IN MECHANICAL ROOMS, BASEMENTS AND CRAWL SPACES MAY BE SURFACE MOUNTED.
- 6.8 FOR CONDUITS CROSSING EXPANSION JOINTS, PROVIDE EXPANSION FITTINGS FOR SIZE 1-1/4", AND LARGER. PROVIDE SECTIONS OF FLEXIBLE CONDUIT WITH GROUNDING JUMPERS FOR SIZES 1" AND SMALLER.
- 6.9 THE CONTRACTOR SHALL SEAL ALL PENETRATIONS THROUGH FIRE RATED WALLS AND FLOORS WITH APPROVED FIRE RATED SEALANT. ALL PENETRATIONS THROUGH ALL WALLS AND FLOORS SHALL BE SEALED, FOR ALL SLAB PENETRATIONS THE METHOD, DEPTHS AND LOCATIONS SHALL BE PRE-APPROVED BY THE BUILDING ENGINEER PRIOR TO THE START OF WORK.
- 6.10 THE CONTRACTOR SHALL INSTALL DETECTABLE UNDERGROUND TAPES FOR THE PROTECTION, LOCATION AND IDENTIFICATION OF UNDERGROUND CONDUIT INSTALLATION.
- 6.11 EXACT ROUTING OF CONDUITS AND CABLES SHALL BE DETERMINED IN FIELD.
- 6.12 ALL PENETRATIONS THROUGH FLOORS SHALL BE FIRE STOPPED AND SEALED WITH APPROVED SEALANT.
- 6.13 ELECTRICAL RACEWAY CONNECTIONS TO VIBRATING EQUIPMENT AND MACHINERY SUCH AS MOTORS, TRANSFORMERS, ETC., SHALL BE MADE WITH FLEXIBLE LIQUID TIGHT METALLIC CONDUIT.
- 6.14 SECURE ALL SUPPORTS TO BUILDING STRUCTURE UTILIZING TOGGLE BOLTS IN HOLLOW MASONRY, EXPANSION SHELDS OR INSERTS IN CONCRETE AND BRICK, MACHINE SCREWS IN METAL BEAM CLAMPS IN FRAMEWORK AND WOOD SCREWS IN WOOD, NAILS, RAWL PLUGS AND WOOD PLUGS ARE NOT PERMITTED. WHERE REQUIRED BY STRUCTURE, PROVIDE THRU BOLTS AND FISH PLATES, SUPPORT RACEWAY RISERS AT EACH FLOOR LEVEL, RUN EXPOSED RACEWAYS PARALLEL WITH OR AT RIGHT ANGLES TO BUILDING LINES.
- 6.15 DO NOT RUN RACEWAYS CLOSER THAN 6 INCHES WHEN PARALLEL TO HOT WATER OR STEAM PIPES. WHEN CROSSING WATER OR STEAM PIPES CROSS A MINIMUM OF 3 INCHES ABOVE. IF CROSSING BELOW IS UNAVOIDABLE, PROVIDE DRIP SHIELDS EXTENDING 6 INCHES BEYOND THE WATER OR STEAMPIPE. BOXES INSTALLED IN PROXIMITY TO WATER OR STEAM PIPE SHALL BE RATED NEWA 4X.

7. BOXES:

- 7.1 INTERIOR OUTLET BOXES SHALL BE METALLIC, EXCEPT AS NOTED. FAN MOUNTING BOXES SHALL BE RATED FOR THE APPLICATION AND FOR THE WEIGHT OF THE FAN. EXTERIOR OUTLET BOXES SHALL BE CAST AULUNIUM AND SHALL BE MADE WEATHERTICHT.
- 7.2 INTERIOR JUNCTION BOXES SHALL BE SHEET STEEL. EXTERIOR JUNCTION BOXES SHALL BE NONMETALLIC, WITH SCREW COVERS. BOXES SHALL BE SUPPORTED INDEPENDENTLY OF CONDUITS.
- 7.3 MOUNTING HEIGHTS OF EQUIPMENT AND DEVICES SHALL BE AS FOLLOWS:

 A. RECEPTACLES (WALL MOUNTED) 18" AF.F.
 B. RECEPTACLES (COUNTER HEIGHT) 9" ABOVE COUNTER
 C. RECEPTACLES (COUNTER HEIGHT) 9" ABOVE COUNTER
 C. RECEPTACLES (COUNTER) 24" ABOVE FINISHED GRADE
 D. COMMUNICATION OUTLETS SAME AS RECEPTACLES
 E. LIGHTING SWITCHES AND CONTROLS 44" AF.F.
 F. PANELBOARDS AND CABINETS 78" TO TOP OF ENCLOSURE
- 7.4 WHERE MULTIPLE SWITCHES AND RECEPTACLES ARE INDICATED AT THE SAME LOCATION, THEY SHALL BE MOUNTED BEININD A COMMON FACEPLATE. TECHNOLOGY OUTLETS SHALL BE SEPARATED FROM ANI BE PROVIDED WITH SEPARATE FACEPLATES FROM THE ASSOCIATED POWER RECEPTACLES.
- 7.5 RECEPTACLES SHALL BE ACCESSIBLE EXCEPT A DEDICATED RECEPTACLE MAY BE OBSTRUCTED BY THE
- 7.6 OUTLET BOXES IN EXISTING CONCRETE FLOORS WITH ACCESS FROM BELOW SHALL BE FIRE RATED, POKE-THROUGH TYPE FOR POWER AND LOW TENSION SERVICE. SERVICE FITTING HEADS SHALL BE ANOIZED ALUMINUM AND SHALL CONTAIN DEVICES AS SHOWN ON THE DRAWINGS. BOXES SHALL BE AS MANUFACTURED BY STEEL CITY OR HUBBELL.
- 7.7 SET BOXES SQUARE AND TRUE WITH BUILDING FINISH. INSTALL RECEPTACLE AND SWITCH OUTLETS IN ADVANCE OF FURRING AND FIREPROOFING. SECURE TO BUILDING STRUCTURE IN ACCORDANCE WITH NEC
- 7.8 FURNISH OUTLET BOXES WITH RAISED COVERS AND FIXTURE STUDS WHERE REQUIRED. WHERE NO FIXTURE OR DEVICE IS INSTALLED, PROVIDE OUTLET BOX WITH BLANK COVER. OFFSET BACK-TO-BACI OUTLETS WITH MINIMUM 6 INCH HORIZOTAL SEPARATION.

8. WIRING:

8.1 ALL WIRE SHALL BE COPPER WITH TYPE THIN/THWN 600 VOLT INSULATION, MINIMUM #10 AWG FOR POWER AND LIGHTING CIRCUITS AND #16 AWG FOR CONTROL CIRCUITS.

- 8.2 UNDER NO CIRCUMSTANCES SHALL FEEDERS BE SPLICED. 8.3 ALL COMPUTER CIRCUITS SHALL HAVE SEPARATE NEUTRAL CONDUCTORS. ALL OTHER CIRCUITS MAY SHARE GROUND AND NEUTRAL CONDUCTORS.
- SHARE GROUND AND REDURING FIXTURES AND WIRING DEVICES ARE SHOWN WITH CIRCUIT NUMBERS ONLY, THE MININUM BRANCH CIRCUITING REQUIREMENTS SHALL BE AS FOLLOWS: A. LIGHTING FIXTURES (2)#12 & #12 GND. B. RECEPTACLES (2)#12 & #12 GND. C. BRANCH CIRCUIT SREAKERS (12 OVLT) 1P, 20A D. HOMERUNS TO PANEL BOARDS SHALL CONTAIN NO MORE THAN THREE CIRCUITS. WIERE UNTING SWITCHES SHALL BOARDS SHALL CONTAIN NO MORE THAN THREE CIRCUITS. WIERE UNTING SWITCHES TO CONTROL ALL SWITCHED FIXTURES WITHIN THE CORRESPONDER SPACE.
- 8.5 ALL ELECTRICAL TERMINAL TEMPERATURE RATINGS ASSUMED TO BE 75° C UNLESS SITE CONDITIONS REQUIRE OTHERWISE.
- 8.6 WIRE SIZES SHALL BE INCREASED WHERE NECESSARY TO LIMIT VOLTAGE DROP AS FOLLOWS: A. 1% TOTAL AND 2% FOR ANY INDIVIDUAL RUN, FROM MODULE TO INVERTER. B. 1% TOTAL AND 2% FOR ANY INDIVIDUAL RUN, FROM INVERTER TO POINT OF INTERCONNECTION

9. GROUNDING:

- 9.1 PROVIDE A COMPLETE EQUIPMENT GROUND SYSTEM FOR THE ELECTRICAL SYSTEM AS REQUIRED BY ARTICLE 250, OF THE NEC, AND AS SPECIFIED HEREIN. 9.2 ALL BRANCH CIRCUITS FOR POWER WIRING SHALL CONTAIN A COPPER GROUND WIRE. NO FLEXIBLE METAL CONDUIT OF ANY KIND OR LENGTH SHALL BE USED AS THE EQUIPMENT GROUNDING CONDUCTOR.

10. MECHANICAL SYSTEMS POWER;

- 10.1 EXCEPT AS OTHERWISE NOTED, EQUIPMENT FURNISHED UNDER THE MECHANICAL TRADE WILL INCLUDE MOTORS, STARTERS, CONTROL EQUIPMENT, INTERLOCK AND CONTROL WRING, ELECTRICAL CONTRACTOR SHALL PROWDE ALL POWER WIRING FROM SOURCE THROUGH INTERVENING EQUIPMENT TO MOTOR TERMINALS. STARTERS SHALL BE INSTALLED BY ELECTRICAL CONTRACTOR.
- 10.2 DISCONNECT SWITCHES SHALL BE HEAVY DUTY, HORSEPOWER RATED, QUICK MAKE, QUICK BREAK TYPE, ENCLOSED IN A HEAVY SHEET METAL ENCLOSURE WITH HINGED INTERLOCKING COVER, IN PROPER NEMA RATED ENCLOSURES. FUSED OR NON-FUSED AS REQUIRED. DISCONNECT SWITCHES SHALL BE PROVIDED BY CONTRACTOR, EXCEPT AS NOTED ON DRAWINGS.
- 14.2 INSTALL NAMEPLATES ON ALL MAJOR EQUIPMENT, INCLUDE DISCONNECT SWITCHES AND OTHER ELECTRICAL BOXES AN 10.3 THE RATING FOR DISCONNECT SWITCHES SHALL BE THE SAME AS, OR GREATER THAN, THE PROTECTIVE DEVICE SERVING THE EQUIPMENT. 14.3 APPLY CABLE/CONDUCTOR IDENTIFICATION MARKERS ON E/ ENCLOSURE OR CABINET.
- 10.4 COORDINATE ALL RECEPTACLES, PLUGS, WIRING AND LOCATIONS WITH THE EQUIPMENT PROVIDED PRIOR TO
- 10.5 A STRUT FRAME SHALL BE PROVIDED AT ALL LOCATIONS WHERE STRUCTURE WILL NOT ADEQUATELY SUPPORT EQUIPMENT, OR FOR FREESTANDING EQUIPMENT.
- 10.6 THE CONTRACTOR SHALL WRE ALL MECHANICAL AND FIRE PROTECTION EQUIPMENT SHOWN ON THE DRAWINGS. COORDINATE WITH MECHANICAL, PLUMBING AND FIRE PROTECTION DRAWINGS. 10.7 ELECTRICAL EQUIPMENT SHIPPED LOOSE BY THE MANUFACTURER SHALL BE INSTALLED AND WRED CONTRACTOR. EQUIPMENT MOUNTED IN THE DUCTWORK WILL BE MOUNTED BY THE GNANICAL CONTRACTOR AND WRED BY THE CONTRACTOR.
- 10.8 THE CONTRACTOR SHALL PROVIDE REMOTE INDICATORS FOR ALL DUCT DETECTORS LOCATED ABOVE REMOVABLE CELINGS, DUCT DETECTORS SHALL BE INSTALLED FOR ALL VENTILATION UNITS WITH 200 CI OR GREATER SUPPLY AIR. REMOTE INDICATORS SHALL BE WALL MOUNTED 12" BELOW CELING IN CLOSE PROXIMITY TO CONCELLED DUCT DETECTOR, UON.

11. DEVICES:

11.1 THE CONTRACTOR SHALL VERIFY COLOR, LOCATION AND MOUNTING HEIGHT OF ALL DEVICES WITH ARCHITECT PRIOR TO INSTALLATION.

11.4 SWITCHES SHALL BE SPECIFICATION GRADE, 20 AMP AT 120/277 VOLTS, QUIET, AC, SINGLE OR DOUBLE POLE, THREE OR FOUR WAY AS REQUIRED, ROCKER STYLE WITH BACK AND SIDE WIRING.

11.5 ALL RECEPTACLES MARKED WP SHALL BE GROUND FAULT PROTECTED AND WEATHER TIGHT WHILE IN USE.

11.6 THE COLOR OF FACEPLATES SHALL MATCH COLOR OF DEVICE WHICH IT COVERS. ALL PLATES SHALL BE

11.2 RECEPTACLES SHALL BE DUPLEX TYPE, 20 AMP, 125 VOLT RATING, WITH SIDE AND BACK WIRING. HUBBELL 5362 OR APPROVED EQUAL. 11.3 GROUND FAULT INTERRUPTERS SHALL BE SPECIFICATION GRADE. HUBBELL GF5362 OR APPROVED EQUAL.

	SUNVEST
12. PANEL BOARDS:	SOLAR INC
12.1 PANELBOARDS: SWITCHING UNITS SHALL BE 3 PHASE, 4 WIRE CIRCUIT BREAKER TYPE UNLESS OHTERWISE NOTED ON PANEL SCHEDULES, BIJS BARS SHALL BE HARD DRAWN COPPER, MINIMUM BRY ONDUCTIVITY, AND SILVER OR TIN-PLATED JOINTS, CABINETS SHALL BE CALVANIZED SHEET STELL BACK BOX, WITH DOOR AND TIMI AND LAPPED AND WEDED CORNERS. HARDWARE SHALL BE CHROME-PLATED WITH FLUSH LOCK/LATCH HANDLE ASSEMBLY (UP TO 48 IN, HIGH DOORS) OR VAULT HANDLE, LOCK AND	N27 W24075 PAUL CT.
WITH FLUSH LOCK/LATCH HANDLE ASSEMBLY (UP TO 48 IN. HIGH DOORS) ON VALLT HANDLE, LOCK AND 3-POINT CATOH (LARGER THAN 48 IN. HIGH DOORS). HINGES SHALL BE SEMI-CONCEALED, 5-KNUCKLE STEEL WITH NONFRENKOUS PINS, 180-DEG OPENING, LOCATED A WAXDMUM 28 UN. ON CENTERS. PROVDE DOOR-IN-DOOR CONSTRUCTION. MINIMUM GUTTER SPACES FOR LIGHTING PANELS SHALL BE 5- BOTTOM. DIRECTORY HOLDER SHALL BE WETAL FRAME WITH CLEAR PLASTIC, TRANSPARENT COVER.	PEWAUKEE, WI 53072 PEWAUKEE, WI 53072 PHONE: (262)-547-1200 WWW.SUNVEST.COM
12.2 PROVIDE A NEW TYPE WRITTEN CIRCUIT DIRECTORY FOR EACH PANEL AFFECTED BY THIS PROJECT.	
12.3 WHEREVER POSSIBLE, PANELBOARDS SHALL BE RECESSED IN WALL. SURFACE MOUNTED PANELBOARDS SHALL BE MOUNTED ON A PLYWOOD BACKBOARD. PLYWOOD SHALL BE MOUNTED ON TOP OF GYNESIM BOARD. PLYWOOD SHALL BE PAINTED ON ALL SIDES AND EDGES. COORDINATE WITH OWNER FOR COLOR.	
12.4 PROVIDE LIGHTINING SURGE PROTECTION FOR MAIN SWITCHBOARD OR MAIN SERVICE PANEL BOARD. PROVIDE GROUNDING OF SURGE DEVICE PER THE NEC.	
12.5 CIRCUIT NUMBERS SHOWN SHALL BE GENERALLY FOLLOWED, HOWEVER, CONTRACTOR IS RESPONSIBLE FOR BALANCING LOADS ON ALL PHASES AND MAY ALTER ASSIGNMENT OF CIRCUITS FOR BALANCING PHASES. 12.6 CIRCUIT SCHEDULES ARE INTENDED TO REPRESENT THE GENERAL WIRING NEEDS OF THE EQUIPMENT	
12.6 CIRCUIT SCHEDULES ARE INTENDED TO REPRESENT THE GENERAL WRING NEEDS OF THE COMPMENT SERVICED FROM THE PANEL THE EXACT CIRCUIT RRANGEMENT MUL BE DETERMINED BY PANEL SHOP DRAWING AND ARRANGEMENT WILL BE DETERMINED BY PANEL SHOP DRAWING AND PANELS ACTUALLY FURNISHED.	
13. LIGHTING	
13.4 PROVIDE LIGHTING FIXTURES AS SHOWN ON THE CONSTRUCTION DRAWINGS, COMPLETE WITH ALL STEMS, RODS, SUPPORTS, PLASTER FRANCES, ETC., NECESSARY FOR AN INSTALLATION IN OR ON THE MATERIAL FINISHES PROVIDED. PROVIDE ALL LAMPS FOR LIGHTING FIXTURES, FIXTURES SHALL HAVE ENERGY SAVING LAMPS, AND WHERE APPLICABLE, ENERGY SAVING BALLASTS WITH HIGH POWER FACTOR.	
13.5 SEE DRAWINGS AND SPECIFICATIONS FOR FIXTURE REQUIREMENTS.	
14. IDENTIFICATION:	
 PROVIDE BLACK PHENOLIC IDENTIFICATION PLATES, WITH WHITE LETTERS ON ALL ELECTRICAL EQUIPMENT FURNISHED IN THIS CONTRACT. ATTACH WITH SUITABLE ADHESIVE. 14.2 INSTALL NAMEPLATES ON ALL MAJOR EQUIPMENT, INCLUDE STARTERS, TRANSFORMERS, PANELBOARDS, 	
14.2 DISCONNECT SWITCHES AND OTHER LECTRICAL DISCONNECT SWITCHES AND CONTRACT. DISCONNECT SWITCHES AND OTHER LECTRICAL DUSCES AND CARLES INSTALLED UNDER THIS CONTRACT.	
enclosure or cabinet.	
15. RECORD DRAWINGS:	
15.1 THE CONTRACTOR SHALL SUBMIT SX (6) COPIES OF SNOP DRAWINGS. THE APPROVAL OF SHOP DRAWINGS SHALL ONLY BE CONSTRUED TO APPLY TO THE GENERAL LAYOUT AND CONFORMANCE TO THE DESIGN CONCEPT OF THE FROMECT AND FOR THE COMPLANCE WITH THE GENERAL REQUIREMENTS OF THE DESIGN CONTRACT DOLUMENTS. THE CONTRACTOR SHALL RETAIN THE RESPONSIBILITY FOR ANY DEVANIONS FROM THE REQUIREMENTS OF THE CONTRACT DOCUMENTS. ONLY CONTRACT DEVANIONS FROM THE REQUIREMENTS OF THE CONTRACT DOCUMENTS.	
CONTRACT DOCUMENTS: THE CONTRACTOR SHALL RETAIN THE RESPONSIBILITY FOR ANY DEVIATIONS FROM THE REQUIREMENTS OF THE CONTRACT DOCUMENTS. 15.2 PROVIDE SHOP DRAWINGS FOR THE LIGHTING FIXTURES, PANEL BOARDS, CIRCUIT BREAKERS, WIRING DEVICES, RIFE ALARM DEVICES AND SEALS FOR FIRE AND WATER STOPPING.	
DEVICES, FIRE ALARM DEVICES AND SEALS FOR FIRE AND WATER STOPPING. 15.3 DURING CONSTRUCTION, THE CONTRACTOR SHALL MAINTAIN A RECORD SET OF INSTALLATION PRINTS. HE SHALL NEATLY AND CLEARLY RECORD ON THESE PRINTS ALL DEVIATIONS FROM THE CONTRACT DRAWINGS IN SIZES, LOCATIONS AND DETAILS.	
SHALL MEALL AND CLEARL TREARD ON THESE PRIMES ALL DEVIATIONS FROM THE CONTRACT DRAWINGS IN SIZES, LOCATIONS AND DETAILS. 15.4 UPON PROJECT COMPLETION, THE CONTRACTOR SHALL COMPLETE THE MARK UP OF ALL PROJECT	
DRAWINGS TO RECORD INSTALLED CONDITIONS. WHELE OWN LTL HIL MINN OF OF HELL HOLDOWN 15.5 REPRODUCIBLE "RECORD" DRAWINGS PREPARED IN CAD (AUTOCAD 2002) FORMAT SHALL BE PROVIDED TO SPRINT INDICATING THE AS INSTALLED CONDITIONS OF THE WORK. A FULL SZE PRINT OUT OF THE	
"RECORD" DRAWING FILE SHALL BE PROVIDED TO SPRINT AFTER COMPLETION OF THE INSTALLATION.	
15.6 UPON COMPLETION AND ACCEPTANCE OF WORK. THE CONTRACTOR SHALL FURNISH WRITTEN INSTRUCTIONS AND EQUIPMENT MANUALS AND DEMONSTRATE TO SPRINT THE PROPER OPERATIONS AND MAINTENANCE OF ALL EQUIPMENT AND APPARATUS FURNISHED UNDER THIS CONTRACT.	
	PROFESSIONAL ENGINEER STAMP
16. CONCRETE SPECS	I hereby certify that this plan,specification,or
16.1 CONCRETE FOR EQUIPMENT PADS SHALL HAVE A MINIMUM COMPRESSIVE STRENGTH OF 3,000 PSI AT 28 DAYS AND BE AIR-ENTRAINED. AIR CONTENT SHALL BE 6 PERCENT. (+/- 1 ½ PERCENT).	report was prepared by me or under my direct supervision and that I am a duly Licensed Professional Engineer under the laws
16.2 ALUMINUM CONDUITS SHALL NOT BE PLACED IN CONCRETE. 16.3 CHAMFER ALL EXPOSED CONCRETE CORNERS.	of the state of <u>WISCONSIN</u> . It should be noted that those plan sheets identified with an (*)
16.4 PROPER CURING PROCEDURES SHALL BE USED FOR SLABS ON GRADE TO PREVENT CURLING.	have been prepared and certified by others and have been included herein for informational purposes only.
16.5 CALCIUM CHLORIDE SHALL NOT BE USED IN CONCRETE MIXES. 16.6 REINFORCING STEEL SHALL CONFORM TO ASTM A615 GRADE 60.	DATE
	F
	D
	с
	В
	A REV DATE DESCRIPTION
	DRAWN BY: RS CHECKED BY:
	SCALE: AS NOTED JOB NO: 18-0214
	FCPC DATA HOLDINGS
	3135 W HIGHLAND BLVD
	MILWAUKEE, WI
	SHEET TITLE
	GENERAL NOTES
	DWG. NO.
	C 4 00
	G-1.00